

E19 E1600

E52

# TECHNICAL CATALOGUE

OPENING WINDOW AND DOOR SYSTEM  
WITH THERMAL BREAK

E40

E40 Q72

E75 E8000

E2300

E70 E85

Q60

# ETEM HISTORY

ETEM is a leading aluminium extrusion company. It was founded in 1971 as a part of the largest metal manufacturing holding in the Balkans. With over 40 years of experience ETEM is a fully integrated designer and producer of architectural systems and aluminium profiles for industrial applications.

Our mission is to listen and promptly respond to our customers' requests and design and manufacture aluminium products and systems, taking into consideration technical and aesthetic requirements.

ETEM focuses on sustainable development and has proven its concern about the protection of the natural environment by making considerable investments in anti-pollution measures and by optimizing production processes following the applicable standards of the European Union.

## SERVICES WE PROVIDE

ETEM supports you with the following:

- ▷ design of conventional and bespoke architectural system solutions
- ▷ innovative engineering in the field of curtain walls, ventilated facades, doors, windows
- ▷ professional consultation and adequate technical advices ensured by our engineering team with wide experience in the field of profile extrusion as well as architectural systems' engineering

- ▷ reliable customer care constant support trainings, technical support and audits on site
  - ▷ high quality engineering which guarantees offering the best solution according to the specific features of every single project
  - ▷ managing the process of certification in accordance with the applicable European standards in Notified Bodies
  - ▷ production of non-standard length profiles and non-standard processing high quality powder coating
-

# ETEM PRODUCTS AND SUSTAINABLE DEVELOPMENT

SUSTAINABLE DEVELOPMENT IS DEVELOPMENT THAT MEETS THE NEEDS OF THE PRESENT WITHOUT COMPROMISING THE ABILITY OF FUTURE GENERATIONS TO MEET THEIR OWN NEEDS.\*

For many, sustainable development is about environmental conservation. This is true but it also includes two other aspects: a social aspect and an economic aspect.

Sustainable development means striking the right balance between economic development, social equity and environmental protection.


For us meeting this objective translates into the challenge of satisfying market demands at the lowest economic, social and environmental cost possible.

ETEM has always designed architectural systems which are in compliance with all requirements for achieving high energy efficiency.

In order to assure the comfort of the building inhabitants, ETEM systems adapt their functions to the changing environment.


As a moderator between outside and inside our systems provide:

- › ENERGY EFFICIENCY
- › DAYLIGHT
- › SUN-SHADING
- › VENTILATION AND GOOD AIR QUALITY
- › SAFETY AND SECURITY

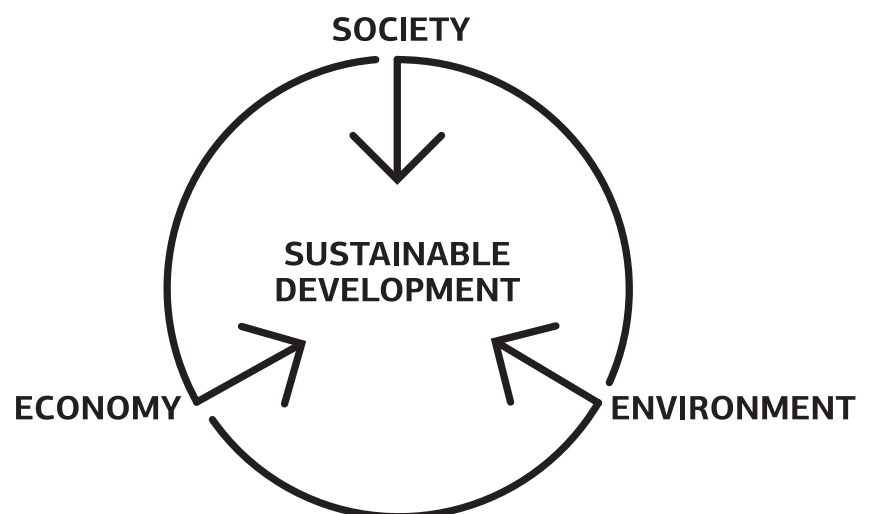

# GENERAL INFORMATION

CONCEPT / ADVANTAGES / CERTIFICATES

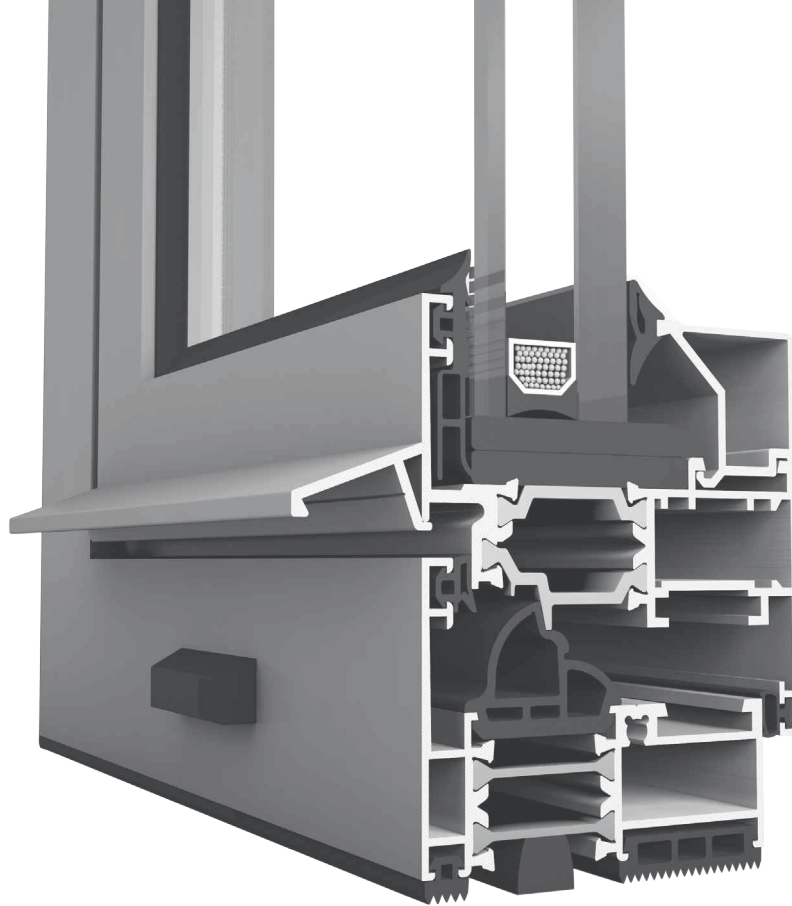

# E40 CONCEPT

E40 IS AN ENERGY CONSERVATION SYSTEM FOR OPENING WINDOWS AND DOORS.

- Effective and affordable solutions for all types of constructions
  - Wide range of profiles and design flexibility of both straight line and round contours
  - Aesthetics, functionality and durability
  - Sound insulation, sealing and thermal insulation
  - Capability of powder coating in any RAL colour, special woodgrain, patterns and other surfaces
  - Opening parts- opening at vertical axis, tilt&turn, opening at top or bottom horizontal axes, folding doors, parallel sliding
  - Reliable pivot mechanism
  - Window sashes for PVC hardware enables multiple locks, hinges adjustment and fast mounting
  - Mechanism for smoke proof doors according to safety regulations
  - Double glazing from 18 up to 32 mm
-

# COMPLIANCE WITH APPLICABLE REGULATIONS

## Production management

Quality Management system is certified in accordance with EN ISO 9001:2008.

Environmental management system is certified in accordance with EN ISO 14001.

Factory production control system is certified according to the requirements of EN 15088. All ETEM profiles are CE marked and in compliance with applicable European Standards.

ETEM is authorized to use the QUALICOAT quality sign for paint, lacquer and powder coating on aluminium for architectural applications.

Occupational Health & Safety Management System is certified in accordance with OHSAS 18001.

### PERFORMANCE CHARACTERISTICS OF E40

| Characteristic          | Classification / value      | Standard                    |
|-------------------------|-----------------------------|-----------------------------|
| Air permeability        | Up to class 4               | EN 1026 / EN 12207          |
| Watertightness          | Up to class E1050           | EN 1027 / EN 12208          |
| Resistance to wind load | Up to class C5              | EN 12211 / EN 12210         |
| Thermal transmittance   | from 2.8 W/m <sup>2</sup> K | EN 12412-2 / EN ISO 10077-2 |
| Acoustic performance    | Up to 41 dB                 | EN ISO 717-1                |

# CLASSIFICATION OF CHARACTERISTICS

for windows without resistance to fire and/or smoke leakage characteristics according to EN 14351-1

| Characteristic / value / dimension   | Classification / Value |   |                            |                           |                           |                       |                  |             |             |             |                 |
|--|------------------------|---|----------------------------|---------------------------|---------------------------|-----------------------|------------------|-------------|-------------|-------------|-----------------|
| <b>Resistance to wind load</b><br>Test pressure P1 (Pa)  | npd                    | 1<br>(400)  | 2<br>(800)                 | 3<br>(1200)               | 4<br>(1600)               | 5<br>(2000)           | Exxxx<br>(>2000) |             |             |             |                 |
| <b>Resistance to wind load</b><br>Frame deflection   | npd                    | A<br>( $\leq 1/150$ )   |                            | B<br>( $\leq 1/200$ )     |                           | C<br>( $\leq 1/300$ ) |                  |             |             |             |                 |
| <b>Resistance to snow and permanent load</b>   | npd                    | Declared information on the infill (e.g. type and thickness of glass) |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Reaction to fire</b>  | npd                    | F   | E                          | D                         | C                         | B                     | A2               | A1          |             |             |                 |
| <b>External fire performance</b>   | npd                    | According to EN 13501-5   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Watertightness</b><br>Non-shielded (A)<br>Test pressure (Pa)  |                        | 1A<br>(0)   | 2A<br>(50)                 | 3A<br>(100)               | 4A<br>(150)               | 5A<br>(200)           | 6A<br>(250)      | 7A<br>(300) | 8A<br>(450) | 9A<br>(600) | Exxxx<br>(>600) |
| <b>Watertightness</b><br>Shielded (B)<br>Test pressure (Pa)  | npd                    | 1B<br>(0)   | 2B<br>(50)                 | 3B<br>(100)               | 4B<br>(150)               | 5B<br>(200)           | 6B<br>(250)      | 7B<br>(300) |             |             |                 |
| <b>Dangerous substances</b>  | npd                    | As required by regulations  |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Impact resistance</b><br>Drop height (mm)   | npd                    | 200   | 300                        | 450                       | 700                       | 950                   |                  |             |             |             |                 |
| <b>Load-bearing capacity of safety devices</b>   | npd <sup>a</sup>       | Threshold value   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Acoustic performance</b><br>Sound insulation<br>$R_w$ ( $C; C_{tr}$ ) (dB)  | npd                    | Declared values   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Thermal transmittance</b><br>$U_w$ ( $W/(m^2.K)$ )  | npd                    | Declared values   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Radiation properties</b><br>Solar factor (g)  | npd                    | Declared values   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Radiation properties</b><br>Light transmittance ( $\tau_v$ )  | npd                    | Declared values   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Air permeability</b><br>Max. test pressure (Pa)<br>Reference air permeability at 100 Pa<br>( $m^3/(h \cdot m^2)$ or $m^3/(h \cdot m)$ ) | npd                    | 1<br>(150)<br>(50 or 12.50)   | 2<br>(300)<br>(27 or 6.75) | 3<br>(600)<br>(9 or 2.25) | 4<br>(600)<br>(3 or 0.75) |                       |                  |             |             |             |                 |
| <b>Operating forces<sup>b</sup></b>  | npd                    | 1   |                            |                           | 2                         |                       |                  |             |             |             |                 |
| <b>Mechanical strength</b>   | npd                    | 1   |                            | 2                         | 3                         |                       | 4                |             |             |             |                 |
| <b>Ventilation</b><br>Air flow exponent n<br>Air flow characteristic K<br>Air flow rates   | npd                    | Declared values   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Bullet resistance</b>   | npd                    | FB1   | FB2                        | FB3                       | FB4                       | FB5                   | FB6              | FB7         | FSG         |             |                 |
| <b>Explosion resistance</b><br>Shock tube  | npd                    | EPR1  |                            | EPR2                      |                           | EPR3                  |                  | EPR4        |             |             |                 |
| <b>Explosion resistance</b><br>Range test  | npd                    | EXR1  |                            | EXR2                      | EXR3                      | EXR4                  | EXR5             |             |             |             |                 |
| <b>Resistance to repeated opening and closing</b><br>Number of cycles  | npd                    | 5000  |                            |                           | 10 000                    |                       | 20 000           |             |             |             |                 |
| <b>Behaviour between different climates</b>  | npd                    | Under development   |                            |                           |                           |                       |                  |             |             |             |                 |
| <b>Burglar resistance</b>  | npd                    | 1   | 2                          | 3                         | 4                         | 5                     | 6                |             |             |             |                 |

NOTE 1: npd: no performance determined

NOTE 2: The figures in brackets are for information

<sup>a</sup> Only if safety device(s) is(are) not provided

<sup>b</sup> Manually operated windows only

# BUILDING PHYSICS

DIMENSIONING / FORMULAS / EXAMPLES



# ALUMINIUM AS MATERIAL

ALUMINIUM IS A VERY YOUNG METAL, EXTRACTED FOR THE FIRST TIME IN 1854. COMMERCIALY PRODUCED AS A PRECIOUS METAL FROM 1886, ITS INDUSTRIAL PRODUCTION FOR CIVIL APPLICATIONS ONLY ACHIEVED WIDE USE IN THE 1950'S.

NOW ALUMINIUM PLAYS A KEY ROLE FOR THE SUSTAINABILITY OF NEW BUILDINGS AND THE RENOVATION OF EXISTING ONES. THANKS TO ITS PERFORMANCE PROPERTIES ALUMINIUM CONTRIBUTES TO THE ENERGY PERFORMANCE, SAFETY AND COMFORT OF NEW BUILDINGS.

## ADVANTAGES

### DESIGN FLEXIBILITY

The extrusion process offers an almost infinite range of forms and sections, allowing designers to integrate numerous functions into one profile

### LONG SERVICE LIFE

Aluminium building products are made from alloys that are weatherproof, corrosion-resistant and immune to the harmful effects of UV rays, ensuring optimal performance over a very long period of time

### HIGH STRENGTH-TO-WEIGHT RATIO

Thanks to the metal's inherent strength and stiffness, aluminium window and curtain wall frames can be very narrow. Material's light weight makes it easier to transport and handle on-site, reducing the risk of work-related injury

### HIGH-REFLECTIVITY

This characteristic feature makes aluminium a very efficient material for light management. Aluminium shading devices can be used to reduce the need for air conditioning in summer

### FIRE SAFETY

Aluminium does not burn and therefore is classified as a non-combustible construction material (European Fire Class A1). Aluminium alloys will nevertheless melt at around 6500 C, but without releasing harmful gases

### NO RELEASE OF DANGEROUS SUBSTANCES

Several studies have proved that aluminium building products do not present a hazard to occupants or the surrounding environment. Aluminium building products have no negative impact, either on indoor air quality or on soil, surface and groundwater

### OPTIMAL SECURITY

Where high security is required, specially designed, strengthened aluminium frames can be used. While the glass for such applications may well be heavy, the overall weight of the structure remains manageable thanks to the light weight of the aluminium frames.

# ALLOYS

Aluminium in its pure form is a very soft metal. Thanks to the addition of alloying elements such as copper, manganese, magnesium, zinc, etc. and thanks to suitable production processes, the physical and mechanical properties can be varied in a wide range to satisfy the requirements of a large number of different applications.

ETEM profiles are extruded from the following alloys:

EN AW-1050 [Al 99.5]  
EN AW-6060 [Al Mg Si]  
EN AW-6063 [Al Mg0,7 Si]  
EN AW-6061 [Al Mg1 Si Cu]  
EN AW-6005 [Al Si Mg]  
EN AW-6082 [Al Si1 Mg Mn]

The most common aluminium alloy which is used by ETEM is EN AW 6063. Here are the properties of this alloy:

## MATERIAL PROPERTIES

|                                  |  |
|----------------------------------|--|
| Aluminium alloy                  | EN AW 6063 F22   |
| Ultimate tensile strength        | Rm = 210 N/mm <sup>2</sup>   |
| Yield strength                   | R <sub>p0.2</sub> = 160 N/mm <sup>2</sup>                          |
| Modulus of elasticity            | Eal=70 000 N/mm <sup>2</sup> = 7.10 <sup>9</sup> kg/m <sup>2</sup> |
| Coefficient of thermal expansion | α=0.023 mm/m .K (up to 1.2 mm/m for difference up to 50°C)         |

# EXTRUSION PROCESS

ETEM profiles are obtained through extrusion process, which consists of pushing a hot cylindrical bullet of aluminium through a shaped die. The extrusion process offers almost infinite range of forms and sections, allowing our designers to integrate numerous functions into one single profile.

aluminium surface, increasing hardness, corrosion and abrasion resistance. Anodizing gives a very decorative silver matt surface finish, and colored can also be obtained by sealing metallic dyes into the anodized layer.

# FINISHING

## POWDER COATING

It is a type of paint that is applied as a dry powder. Coating is applied on ETEM profiles electrostatically and then is cured under heat to allow it to flow and form a "skin".

ETEM is authorized to use the quality sign QUALICOAT for powder coatings on aluminium for architectural applications. A wide range of colors and gloss levels can be achieved.

ETEM also offers timber imitations painting, in addition to all RAL colors. The technology EZY provides the following colors: Golden Oak, Acero, Betulla, Mogano, Verde Scuro, Wenge, Noce Fiammato, Noce Chiaro, Ciliegio Rosso, Acacia Scuro, Ciliegio Antico, Noce Reale, Ciliegio Reale.

## ANODIZING

It is an electrochemical process whereby to reinforce the natural oxide film on the

# MAINTENANCE

Apart from routine cleaning for aesthetic reasons, ETEM aluminium profiles do not require any maintenance which translates into a major cost and ecological advantage over lifetime of the product.

# RECYCLING

Aluminium scrap can be repeatedly recycled without any loss of value or properties. In many instances, aluminium is combined with other materials such as steel or plastics, which are most frequently mechanically separated from aluminium before being molten.

# WIND LOAD

## Wind action

The main influence over the facade is wind action, which depends mainly on the height of the curtain wall and location.

As a guideline, the wind pressure values with respect to the structure height are given in the table below:

| Building Height | Wind Velocity | Wind Load            |                   | Wind Pressure                     |                   | Wind Suction in a middle zone                          |   |   |                   | Wind Suction in an edge zone |                   |
|-----------------|---------------|----------------------|-------------------|-----------------------------------|-------------------|--|---|---|-------------------|------------------------------|-------------------|
|                 |               | $q = \frac{V^2}{16}$ |                   | $Wp^* = 1.25 \times c_p \times q$ |                   | $h/b \leq 0.25$<br>$W_s = c_p \times q$<br>$c_p = 0.5$ | $h/b \geq 0.5$<br>$W_s = c_p \times q$<br>$c_p = 0.7$ | $b/8 \leq 2 \text{ m}$<br>$W_s = c_p \times q$<br>$c_p = 2.0$ |                   |                              |                   |
| m               | m/s           | kg/m <sup>2</sup>    | kg/m <sup>2</sup> | kg/m <sup>2</sup>                 | kg/m <sup>2</sup> | kg/m <sup>2</sup>                                      | kg/m <sup>2</sup>                                     | kg/m <sup>2</sup>   | kg/m <sup>2</sup> | kg/m <sup>2</sup>            | kg/m <sup>2</sup> |
| 0 - 8           | 28.3          | 50                   | 0.5               | 50                                | 0.5               | 25   | 0.25  | 35  | 0.35              | 100                          | 1.0               |
| 8 - 20          | 35.8          | 80                   | 0.8               | 80                                | 0.8               | 40   | 0.40  | 56  | 0.56              | 160                          | 1.6               |
| 20 - 100        | 42.0          | 110                  | 1.1               | 110                               | 1.1               | 55   | 0.55  | 77  | 0.77              | 220                          | 2.2               |
| > 100           | 45.6          | 130                  | 1.3               | 130                               | 1.3               | 65   | 0.65  | 91  | 0.91              | 260                          | 2.6               |

where:

h - building height, m

b - building width, m

v - wind velocity, m/s

q - wind load, kg/m<sup>2</sup> and kN/m<sup>2</sup>

$w_{p/s}$  - wind pressure / suction, kN/m<sup>2</sup>

$c_p$  - correction factor

\*Note: When calculating wind pressure  $w_p$  the load is increased with 25%

# UNITS CONVERTER

1 m = 100 cm = 1000 mm

1 kg = 10 N

1 kN = 100 kg = 1000 N

1 kg/m<sup>2</sup> = 0.01 kN/m<sup>2</sup>

1 Pa = 1 N/m<sup>2</sup> = 0.1 kg/m<sup>2</sup>

1 kPa = 1000 Pa = 1 kN/m<sup>2</sup> = 100 kg/m<sup>2</sup>

1 MPa = 1000 kPa = 1 000 000 Pa

1 MPa = 1 N/mm<sup>2</sup> = 0.1 kN/cm<sup>2</sup> = 100 000 kg/m<sup>2</sup>

# MULLION SELECTION

## \*Wind load actions:

The required moment of inertia of a mullion due to the wind action is given by:

a) triangle load

$$\text{If } \frac{H}{c} \leq 1, I_{yc} \geq \frac{w \cdot (H/2) \cdot H^4 \cdot 10^8}{120 \cdot E_{al} \cdot f_{max}}, \text{cm}^4$$

or

b) trapezoid load

$$\text{If } \frac{H}{c} > 1, I_{yc} \geq \frac{w \cdot (C/2) \cdot H^4}{1920 \cdot E_{al} \cdot f_{max}} \cdot 10^8 \cdot \left[ 25 - 40 \cdot \frac{(C/2)^2}{H^2} + 16 \cdot \frac{(C/2)^4}{H^4} \right], \text{cm}^4$$

Use the same method to calculate  $I_{yd}$

Total of required moment of inertia:

$$I_y = I_{yc} + I_{yd}, \text{cm}^4$$

Where:

$I_y$  - Moment of inertia of a transom,  $\text{cm}^4$

$w$  - Wind pressure,  $\text{kg/m}^2$

$E_{al}$  - Modulus of Elasticity of aluminium,  $\text{kg/m}^2$

$f_{max}$  - Maximum transom deflection, m

$H$  - Length of a mullion, m

$c, d$  - Distance between mullions, m


Maximum transom deflection  $f_{max}$  by wind load:

$$f = \frac{H}{200}, \text{m} \text{ or } 0,015 \text{ m} - \text{whichever is less (EN 14351-1)}$$

Use ETEM Catalogue to choose the appropriate mullion with  $I_y$  exceeding or equal to the required  $I_y$ .

Use ETEM Catalogue to choose the appropriate profile which characteristics exceed or are equal to both calculated values  $I_x$  and  $I_y$ .

Example:

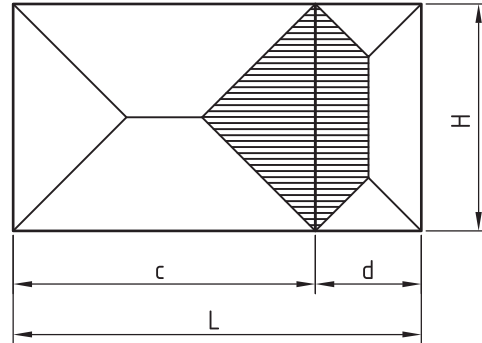

Initial data:

$$H = 2,2 \text{ m}$$

$$w = 60 \text{ kg/m}^2$$

$$c = 2,4 \text{ m}$$

$$E_{al} = 7 \cdot 10^9 \text{ kg/m}^2$$

$$d = 0,8 \text{ m}$$

$$f = \frac{H}{200} = \frac{2,2}{200} = 0,011 \text{ m} \text{ or } 0,015 \text{ m (EN 14351-1)}$$

$\Rightarrow f_{max} = 0,011 \text{ m}$  in the following formulas:

$$\frac{H}{c} = \frac{2,2}{2,4} = 0,91 < 1$$

$$I_{yc} \geq \frac{w \cdot (H/2) \cdot H^4 \cdot 10^8}{120 \cdot E_{al} \cdot f_{max}}, \text{cm}^4$$

$$I_{yc} \geq \frac{60 \cdot (2,2/2) \cdot 2,2^4 \cdot 10^8}{120 \cdot 7 \cdot 10^9 \cdot 0,011}, \text{cm}^4 \Rightarrow I_{yc} \geq 16,73 \text{ cm}^4$$

$$\frac{H}{d} = \frac{2,2}{0,8} = 2,75 > 1$$

$$I_{yd} \geq \frac{w \cdot (d/2) \cdot H^4}{1920 \cdot E_{al} \cdot f_{max}} \cdot 10^8 \cdot \left[ 25 - 40 \cdot \frac{(d/2)^2}{H^2} + 16 \cdot \frac{(d/2)^4}{H^4} \right], \text{cm}^4$$

$$I_{yd} \geq \frac{60 \cdot (0,8/2) \cdot 2,2^4}{1920 \cdot 7 \cdot 10^9 \cdot 0,011} \cdot 10^8 \cdot \left[ 25 - 40 \cdot \frac{(0,8/2)^2}{2,2^2} + 16 \cdot \frac{(0,8/2)^4}{2,2^4} \right], \text{cm}^4$$

$$I_{yd} \geq 9,01 \text{ cm}^4$$

$$I_y = I_{yc} + I_{yd}, \text{cm}^4 \Rightarrow I_y = 16,73 + 9,01 = 25,74 \text{ cm}^4$$

Use ETEM Catalogue to choose the appropriate mullion with

$$I_y \geq 25,74 \text{ cm}^4$$

We choose mullion E40351 with  $I_x = 28,62 \text{ cm}^4$

and  $I_y = 33,38 \text{ cm}^4$

# TRANSOM SELECTION

## \*Dead load actions:

\*Glass pane self weight:

Weight of the glass pane G is calculated as follows:

The required moment of inertia of a transom due to the weight of the glazing is given by:

$$I_{x1} \geq \frac{G \cdot a \cdot 10^8}{48 \cdot E_{al} \cdot f_{max}} \cdot (3 \cdot L^2 - 4 \cdot a^2), \text{cm}^4$$

Where:

G - Weight of glass pane, kg

t - Glass pane thickness, mm

$\rho_{glass}$  - Density of glass material, kg/m<sup>2</sup>/mm

$l_g$  - Horizontal dimension of the glass pane, m

$h_g$  - Vertical dimension of the glass pane, m

\*Transom self weight:

The required moment of inertia of a transom due to its self weight is given by:

$$I_{x2} \geq \frac{5 \cdot q \cdot L^4 \cdot 10^8}{384 \cdot E_{al} \cdot f_{max}}, \text{cm}^4$$

Total of required moment of inertia:

$$I_x = I_{x1} + I_{x2}, \text{cm}^4$$

Where:

a=0,15 - Distance of a glazing supports of the glass pane, m

$I_x$  - Moment of inertia of a transom, cm<sup>4</sup>

q - Self weight of a transom per linear meter, kg/m

$E_{al}$  - Modulus of Elasticity of aluminium, kg/m<sup>2</sup>

$f_{max}$  - Maximum transom deflection, m

L - Length of a transom, m


Maximum transom deflection f max by dead load:

$$f = \frac{L}{500}, \text{m} \quad \text{or} \quad 0,003 \text{ m} \quad \text{- whichever is less (EN 14351-1)}$$

Use ETEM Catalogue to choose the appropriate transom with  $I_y$  exceeding or equal to the required  $I_y$ .

Use ETEM Catalogue to choose the appropriate profile which characteristics exceed or are equal to both calculated values  $I_x$  and  $I_y$ .

Example:  $G = t \cdot \rho_{glass} \cdot l_g \cdot h_g$

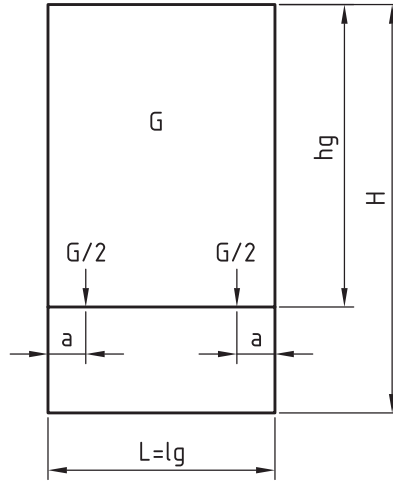

Initial data:

$$t = 12 \text{ mm}$$

$$E_{al} = 7 \cdot 10^9 \text{ kg/m}^2$$

$$l_g = 1,5 \text{ m}$$

$$\rho_{glass} = 2,5 \text{ kg/m}^2/\text{mm}$$

$$h_g = 2,0 \text{ m}$$

$$q = 2 \text{ kg/m}$$

$$a = 0,15 \text{ m}$$

$$G = t \cdot \rho_{glass} \cdot l_g \cdot h_g = 10 \cdot 2,5 \cdot 1,5 \cdot 2,0 = 75 \text{ kg}$$

$$\Rightarrow f_{max} = \frac{L}{500} = \frac{1,5}{500} = 0,003 \text{ m} \quad \text{or} \quad 0,003 \text{ m (EN 14351-1)}$$

$$\Rightarrow f_{max} = 0,003 \text{ m in the following formulas:}$$

$$I_{x1} \geq \frac{G \cdot a \cdot 10^8}{48 \cdot E_{al} \cdot f_{max}} \cdot (3 \cdot L^2 - 4 \cdot a^2), \text{cm}^4$$

$$I_{x1} \geq \frac{75 \cdot 0,15 \cdot 10^8}{48 \cdot 7 \cdot 10^9 \cdot 0,003} \cdot (3 \cdot 1,5^2 - 4 \cdot 0,15^2), \text{cm}^4$$

$$I_{x1} \geq \frac{75 \cdot 0,15 \cdot 10^8}{48 \cdot 7 \cdot 10^9 \cdot 0,003} \cdot (3 \cdot 1,5^2 - 4 \cdot 0,15^2), \text{cm}^4 \Rightarrow I_{x1} \geq 7,43 \text{cm}^4$$

$$I_{x2} \geq \frac{5 \cdot q \cdot L^4 \cdot 10^8}{384 \cdot E_{al} \cdot f_{max}}, \text{cm}^4 \quad I_{x2} \geq \frac{5 \cdot 2 \cdot 1,5^4 \cdot 10^8}{384 \cdot 7 \cdot 10^9 \cdot 0,003}, \text{cm}^4 \Rightarrow I_{x2} \geq 0,63 \text{cm}^4$$

$$I_x = I_{x1} + I_{x2}, \text{cm}^4$$

$$I_x = 7,43 + 0,63 = 8,06 \text{ cm}^4$$

Use ETEM Catalogue to choose the appropriate transom with

$$I_x \geq 8,06 \text{ cm}^4$$

We choose transom E40301 with  $I_x = 13,26 \text{ cm}^4$

and  $I_y = 14,22 \text{ cm}^4$

# TRANSOM SELECTION

## \*Wind load actions:

The required moment of inertia of a transom due to the wind action is given by:

a) triangle load

$$\text{If } \frac{L}{a} \leq 1, I_{ya} \geq \frac{w \cdot (L/2) \cdot L^4 \cdot 10^8}{120 \cdot E_{al} \cdot f_{max}}, \text{cm}^4$$

or

b) trapezoid load

$$\text{If } \frac{L}{a} > 1, I_{ya} \geq \frac{w \cdot (a/2) \cdot L^4}{1920 \cdot E_{al} \cdot f_{max}} \cdot 10^8 \cdot \left[ 25 - 40 \cdot \frac{(a/2)^2}{L^2} + 16 \cdot \frac{(a/2)^4}{L^4} \right], \text{cm}^4$$

Use the same method to calculate  $I_{xb}$

Total of required moment of inertia:

$$I_y = I_{ya} + I_{yb}, \text{cm}^4$$

Where:

$I_y$  - Moment of inertia of a transom,  $\text{cm}^4$

$w$  - Wind pressure,  $\text{kg/m}^2$

$E_{al}$  - Modulus of Elasticity of aluminium,  $\text{kg/m}^2$

$f_{max}$  - Maximum transom deflection, m

$L$  - Length of a transom, m

$a, b$  - Distance between transoms, m


Maximum transom deflection  $f_{max}$  by wind load:

$$f = \frac{L}{200}, \text{m} \text{ or } 0.015 \text{ m} - \text{whichever is less (EN 14351-1)}$$

Use ETEM Catalogue to choose the appropriate transom with  $I_x$  exceeding or equal to the required  $I_x$ .

Use ETEM Catalogue to choose the appropriate profile which characteristics exceed or are equal to both calculated values  $I_x$  and  $I_y$ .

Example:

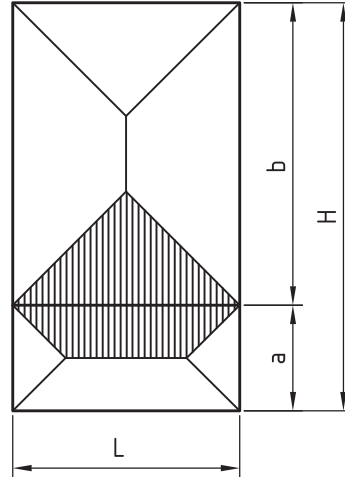

Initial data:

$$L = 1,5 \text{ m}$$

$$w = 60 \text{ kg/m}^2$$

$$a = 0,7 \text{ m}$$

$$E_{al} = 7.10 \text{ kg/m}^2$$

$$b = 2,0 \text{ m}$$

$$f = \frac{L}{200} = \frac{1,5}{200} = 0,0075 \text{ m or } 0,015 \text{ m (EN 14351-1)}$$

$\Rightarrow f_{max} = 0,0075 \text{ m}$  in the following formulas:

$$\frac{L}{a} = \frac{1,5}{0,7} = 2,14 > 1$$

$$I_{ya} \geq \frac{w \cdot (a/2) \cdot L^4}{1920 \cdot E_{al} \cdot f_{max}} \cdot 10^8 \cdot \left[ 25 - 40 \cdot \frac{(a/2)^2}{L^2} + 16 \cdot \frac{(a/2)^4}{L^4} \right], \text{cm}^4$$

$$I_{ya} \geq \frac{60 \cdot (0,7/2) \cdot 1,5^4}{1920 \cdot 7 \cdot 10^9 \cdot 0,0075} \cdot 10^8 \cdot \left[ 25 - 40 \cdot \frac{(0,7/2)^2}{1,5^2} + 16 \cdot \frac{(0,7/2)^4}{1,5^4} \right], \text{cm}^4$$

$$I_{ya} \geq 2,41 \text{ cm}^4$$

$$\frac{L}{b} = \frac{1,5}{2,0} = 0,75 < 1$$

$$I_{yb} \geq \frac{w \cdot (L/2) \cdot L^4 \cdot 10^8}{120 \cdot E_{al} \cdot f_{max}}, \text{cm}^4 \Rightarrow I_{yb} \geq \frac{60 \cdot (1,5/2) \cdot 1,5^4 \cdot 10^8}{120 \cdot 7 \cdot 10^9 \cdot 0,0075}, \text{cm}^4$$

$$\Rightarrow I_{yb} \geq 3,62 \text{ cm}^4$$

$$I_y = I_{ya} + I_{yb}, \text{cm}^4$$

$$\Rightarrow I_y = 2,41 + 3,62 = 6,03 \text{ cm}^4$$

Use ETEM Catalogue to choose the appropriate mullion with

$$I_y \geq 6,03 \text{ cm}^4$$

We choose mullion E40301 with  $I_x = 13,26 \text{ cm}^4$

$$\text{and } I_y = 14,22 \text{ cm}^4$$

# CALCULATION OF GLASS PANE THICKNESS

## \*Glazing thickness:

For single glazing the minimum thickness is given by the following equations:

$$a) \text{ If } \frac{h_g}{l_g} \leq 3, \quad t = \sqrt{\frac{10 \cdot l_g \cdot h_g \cdot w}{72}}, \text{mm}$$

or

$$b) \text{ If } \frac{h_g}{l_g} > 3, \quad t = \frac{l_g \cdot \sqrt{10 \cdot w}}{72}, \text{mm}$$

Where:

$t$  - Minimum theoretical glass thickness, mm

$w$  - Wind pressure,  $\text{kg/m}^2$

$l_g$  - The smallest dimension of the glass pane, m


$h_g$  - The largest dimension of the glass pane, m

For double glazing, the total thickness of both glasses in the panel is equal to the thickness of a single glass pane (evaluated using the above equations) multiplied by 1.5

For triple glazing, the total thickness of all glasses in the panel is equal to the thickness of a single glass pane (evaluated using the above equations) multiplied by 1.7

Always consult facade engineer or glazing manufacturer when calculating for required glazing thickness and maximum allowable dimensions.

Example:

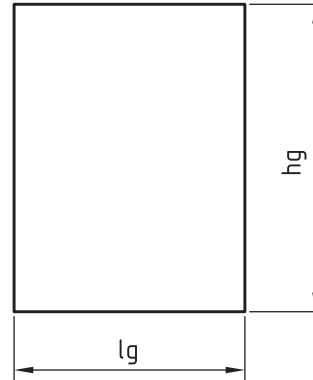

Initial data:

$$l_g = 1,5 \text{ m}$$

$$h_g = 2,0 \text{ m}$$

$$w = 60 \text{ kg/m}^2$$


$$\frac{h_g}{l_g} = \frac{2}{1,5} = 1,33 \leq 3$$

$$t = \sqrt{\frac{10 \cdot l_g \cdot h_g \cdot w}{72}} = \sqrt{\frac{10 \cdot 1,5 \cdot 2 \cdot 60}{72}} = \sqrt{\frac{1800}{72}} = 5 \text{ mm}$$

$$\text{For double glazing } t_{\text{req}} = 1,5 \cdot 5 = 7,5 \text{ mm}$$


We choose double glazing 5/14/5

# GLAZING SHIMS


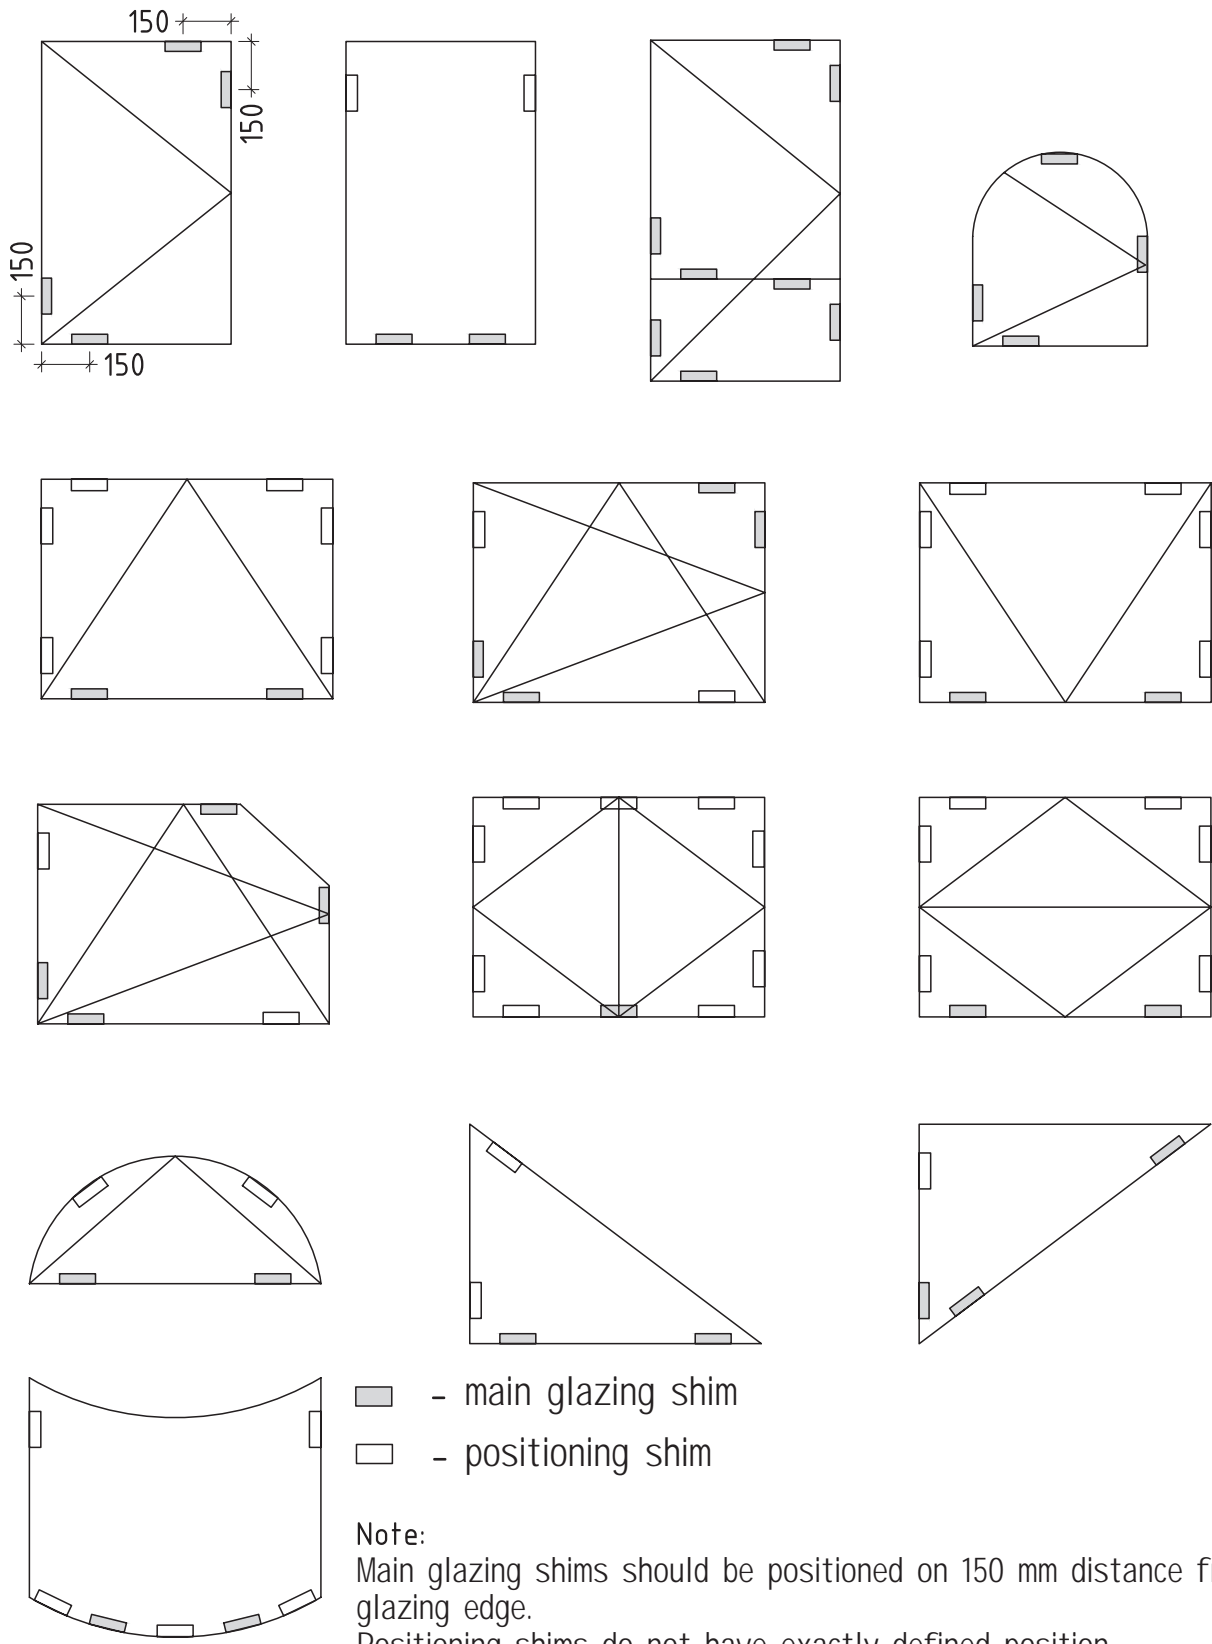




# POSITION OF ANCHORS

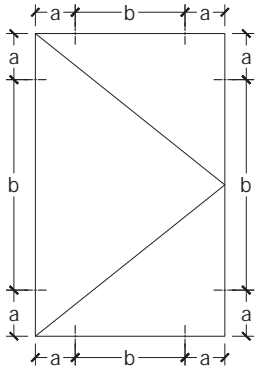

$a = 150 \div 200 \text{ mm}$   
 $b \leq 800 \text{ mm}$

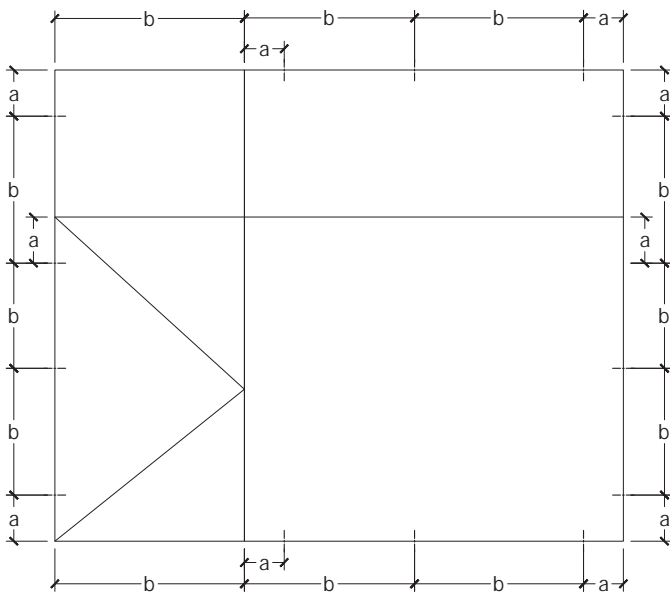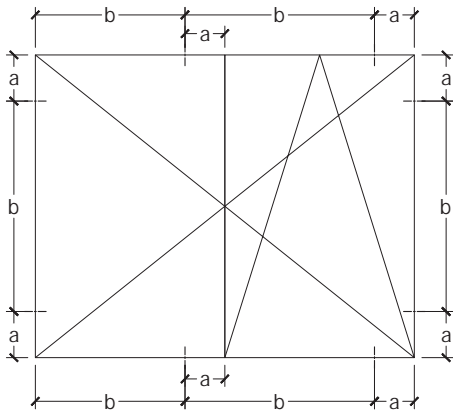


# METHOD FOR CALCULATION OF THERMAL TRANSMITTANCE ACCORDING to EN ISO 10077-2

$$U_w = \frac{A_g \times U_g + A_f \times U_f + l_g \times \Psi_g}{A_g + A_f} \quad (1)$$

- $U_w$  - thermal transmittance coefficient of the whole structure
- $U_g$  - glass thermal transmittance coefficient
- $U_f$  - thermal transmittance coefficient of the aluminium frame (frame and sash)
- $\Psi_g$  - spacer linear thermal transmittance
- $l_g$  - total length of the spacer
- $A_g$  - glass area
- $A_f$  - aluminium frame area (frame and sash)


$U_w$  - is calculated by formula (1)  
 $U_g$  - is given by the glass manufacturer  
 $U_f$  - is given by the manufacturer of the aluminium profiles

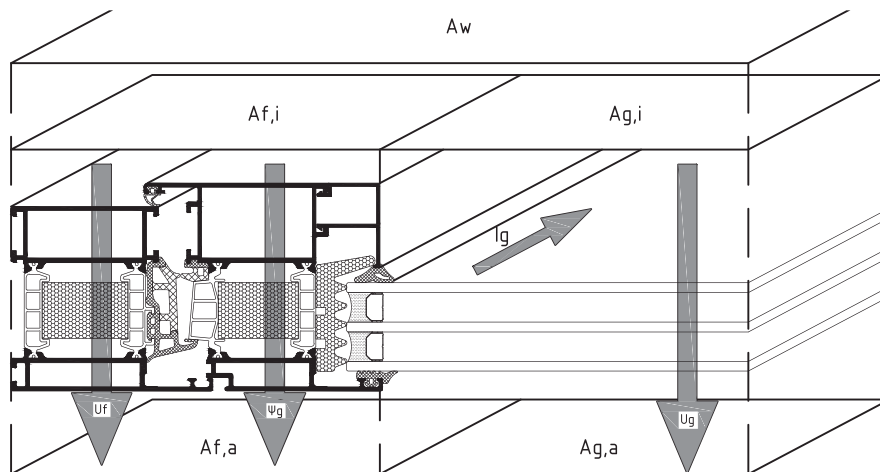

## EXAMPLE FOR CALCULATING THERMAL TRANSMITTANCE COEFFICIENT

|                       |          |       |                      |
|-----------------------|----------|-------|----------------------|
| frame: E40            | $U_f$    | 2.8   | W/(m <sup>2</sup> K) |
| spacer: warm edge     | $\Psi_g$ | 0.051 | W/(mK)               |
| glass: triple glazing | $U_g$    | 1.00  | W/(m <sup>2</sup> K) |

window width: 1.00 m  
 window height: 2.00 m  
 length of glass edge  $l_g$ : 4.89 m  
 $A_g = 1.3 \text{ m}^2$ ;  $A_f = 0.7 \text{ m}^2$






$$U_w = \frac{1.3 \times 1 + 0.7 \times 2.8 + 5 + 0.051}{1.3 + 0.7}$$


$U_w \approx 1.75 \text{ W/(m}^2\text{K)}$

# TABLES


TYPES / LIST OF PROFILES / CHARACTERISTICS

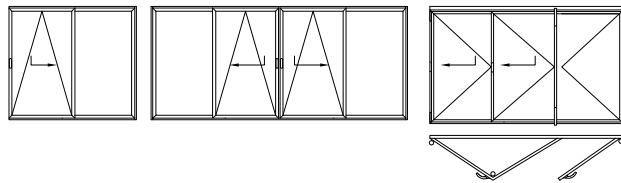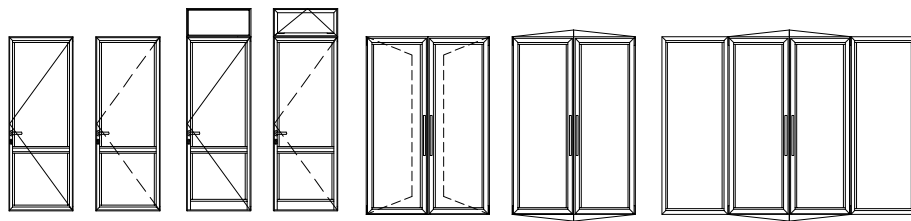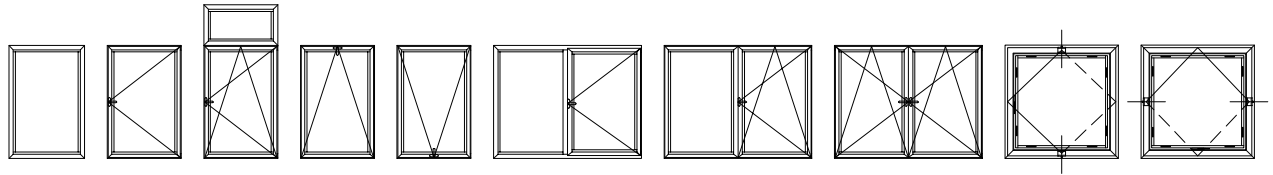

opening schemes:  
321;330;431;541;550;  
532;651;633;761;770;743



Hidden vent

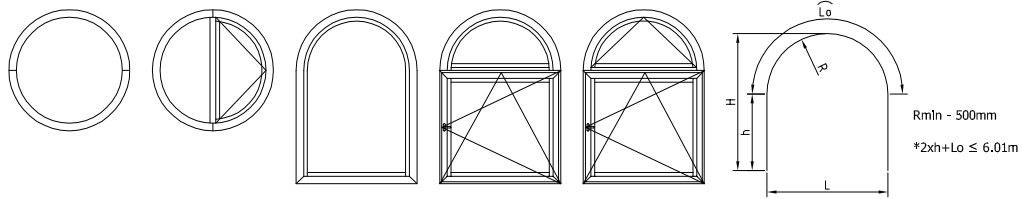

# opening system with thermal break















# E40

| code   | profile | weight<br>length<br>moment of inertia   | code   | profile | weight<br>length<br>moment of inertia  |
|--------|---------|---|--------|---------|--|
| E40100 |         | 913 g/m<br>L=6.01 m<br><br>Ix=3.37 cm <sup>4</sup><br>Iy=9.46 cm <sup>4</sup>     | E40135 |         | 1627 g/m<br>L=6.01 m<br><br>Ix=20 cm <sup>4</sup><br>Iy=117.58 cm <sup>4</sup>   |
| E40101 |         | 1094 g/m<br>L=6.01 m<br><br>Ix=7.96 cm <sup>4</sup><br>Iy=11.86 cm <sup>4</sup>   | E40150 |         | 1001 g/m<br>L=6.01 m<br><br>Ix=4.36 cm <sup>4</sup><br>Iy=12.65 cm <sup>4</sup>  |
| E40102 |         | 1205 g/m<br>L=6.01 m<br><br>Ix=12.32 cm <sup>4</sup><br>Iy=13.33 cm <sup>4</sup>  | E40151 |         | 1183 g/m<br>L=6.01 m<br><br>Ix=9.66 cm <sup>4</sup><br>Iy=15.56 cm <sup>4</sup>  |
| E40185 |         | 972 g/m<br>L=6.01 m<br><br>Ix=13.09 cm <sup>4</sup><br>Iy=12.11 cm <sup>4</sup>   | E40152 |         | 1294 g/m<br>L=6.01 m<br><br>Ix=14.58 cm <sup>4</sup><br>Iy=17.34 cm <sup>4</sup> |
| E40121 |         | 1276 g/m<br>L=6.01 m<br><br>Ix=11.62 cm <sup>4</sup><br>Iy=14.44 cm <sup>4</sup>  | E40154 |         | 1350 g/m<br>L=6.01 m<br><br>Ix=12.92 cm <sup>4</sup><br>Iy=26.29 cm <sup>4</sup> |
| E40130 |         | 2500 g/m<br>L=6.01 m<br><br>Ix=26.24 cm <sup>4</sup><br>Iy=307.81 cm <sup>4</sup> | E40153 |         | 1513 g/m<br>L=6.01 m<br><br>Ix=17.25 cm <sup>4</sup><br>Iy=55.97 cm <sup>4</sup> |

L40-01

# opening system with thermal break

# E40

| code   |  | profile   | weight<br>length<br>moment of inertia  | code          |  | profile   | weight<br>length<br>moment of inertia  |
|--------|---|---|--|---------------|--|---|--|
| E40180 |   |    | 972 g/m<br>L=6.01 m<br><br>$I_x=3.53 \text{ cm}^4$<br>$I_y=11.75 \text{ cm}^4$   | E40252        |  |    | 1586 g/m<br>L=6.01 m<br><br>$I_x=30.6 \text{ cm}^4$<br>$I_y=24.48 \text{ cm}^4$  |
| E40200 |   |    | 1125 g/m<br>L=6.01 m<br><br>$I_x=5.95 \text{ cm}^4$<br>$I_y=16.21 \text{ cm}^4$  | E40281        |  |    | 1238 g/m<br>L=6.01 m<br><br>$I_x=10.83 \text{ cm}^4$<br>$I_y=17.43 \text{ cm}^4$ |
| E40201 |   |   | 1251 g/m<br>L=6.01 m<br><br>$I_x=10.79 \text{ cm}^4$<br>$I_y=18.99 \text{ cm}^4$ | E40241        |  |   | 1481 g/m<br>L=6.01 m<br><br>$I_x=15.98 \text{ cm}^4$<br>$I_y=20.88 \text{ cm}^4$ |
| E40202 |   |  | 1554 g/m<br>L=6.01 m<br><br>$I_x=27.35 \text{ cm}^4$<br>$I_y=24.51 \text{ cm}^4$ | E40240        |  |  | 1548 g/m<br>L=6.01 m<br><br>$I_x=26.92 \text{ cm}^4$<br>$I_y=24.15 \text{ cm}^4$ |
| E40250 |   |  | 1154 g/m<br>L=6.01 m<br><br>$I_x=7.32 \text{ cm}^4$<br>$I_y=16.26 \text{ cm}^4$  | E40290        |  |  | 1601 g/m<br>L=6.01 m<br><br>$I_x=29.81 \text{ cm}^4$<br>$I_y=24.13 \text{ cm}^4$ |
| E40251 |   |  | 1283 g/m<br>L=6.01 m<br><br>$I_x=12.73 \text{ cm}^4$<br>$I_y=18.98 \text{ cm}^4$ | E40221<br>PVC |  |  | 1374 g/m<br>L=6.01 m<br><br>$I_x=13.14 \text{ cm}^4$<br>$I_y=21.49 \text{ cm}^4$ |

L40-02

# opening system with thermal break

# E40

| code                  | profile | weight<br>length<br>moment of inertia  | code                  | profile | weight<br>length<br>moment of inertia  |
|-----------------------|---------|--|-----------------------|---------|--|
| E40222<br>PVC         |         | 1792 g/m<br>L=6.01 m<br>$I_x=37.76 \text{ cm}^4$<br>$I_y=29.11 \text{ cm}^4$ | E40530<br>pivot mech. |         | 1099 g/m<br>L=6.01 m<br>$I_x=7.87 \text{ cm}^4$<br>$I_y=9.96 \text{ cm}^4$   |
| E40271<br>PVC         |         | 1395 g/m<br>L=6.01 m<br>$I_x=15.21 \text{ cm}^4$<br>$I_y=21.51 \text{ cm}^4$ | E40300                |         | 1114 g/m<br>L=6.01 m<br>$I_x=6.59 \text{ cm}^4$<br>$I_y=11.77 \text{ cm}^4$  |
| E40272<br>PVC         |         | 1824 g/m<br>L=6.01 m<br>$I_x=41.48 \text{ cm}^4$<br>$I_y=29.13 \text{ cm}^4$ | E40301                |         | 1316 g/m<br>L=6.01 m<br>$I_x=13.26 \text{ cm}^4$<br>$I_y=14.22 \text{ cm}^4$ |
| E40295<br>PVC         |         | 1831 g/m<br>L=6.01 m<br>$I_x=40.47 \text{ cm}^4$<br>$I_y=28.58 \text{ cm}^4$ | E40302                |         | 1997 g/m<br>L=6.01 m<br>$I_x=19.77 \text{ cm}^4$<br>$I_y=63.9 \text{ cm}^4$  |
| E40275<br>PVC         |         | 1359 g/m<br>L=6.01 m<br>$I_x=13.12 \text{ cm}^4$<br>$I_y=19.88 \text{ cm}^4$ | E40350                |         | 1409 g/m<br>L=6.01 m<br>$I_x=17.3 \text{ cm}^4$<br>$I_y=18.95 \text{ cm}^4$  |
| E40230<br>pivot mech. |         | 1460 g/m<br>L=6.01 m<br>$I_x=14.5 \text{ cm}^4$<br>$I_y=21.15 \text{ cm}^4$  | E40351                |         | 1846 g/m<br>L=6.01 m<br>$I_x=28.62 \text{ cm}^4$<br>$I_y=33.38 \text{ cm}^4$ |

L40-03

# opening system with thermal break

# E40















| code                         | profile | weight<br>length<br>moment of inertia   | code                         | profile | weight<br>length<br>moment of inertia  |
|------------------------------|---------|---|------------------------------|---------|--|
| E40340<br>straight<br>sashes |         | 1330 g/m<br>L=6.01 m<br><br>Ix=13.22 cm <sup>4</sup><br>Iy=18.96 cm <sup>4</sup>  | E40500                       |         | 1194 g/m<br>L=6.01 m<br><br>Ix=6.58 cm <sup>4</sup><br>Iy=13.69 cm <sup>4</sup>  |
| E40303                       |         | 2677 g/m<br>L=6.01 m<br><br>Ix=137.04 cm <sup>4</sup><br>Iy=33.15 cm <sup>4</sup> | E40550                       |         | 1264 g/m<br>L=6.01 m<br><br>Ix=7.98 cm <sup>4</sup><br>Iy=17.36 cm <sup>4</sup>  |
| E40331                       |         | 2248 g/m<br>L=6.01 m<br><br>Ix=87.7 cm <sup>4</sup><br>Iy=29.8 cm <sup>4</sup>    | E40580                       |         | 1238 g/m<br>L=6.01 m<br><br>Ix=6.82 cm <sup>4</sup><br>Iy=15.94 cm <sup>4</sup>  |
| E40330<br>straight<br>sashes |         | 2363 g/m<br>L=6.01 m<br><br>Ix=96.17 cm <sup>4</sup><br>Iy=38.48 cm <sup>4</sup>  | E40540<br>PVC                |         | 1187 g/m<br>L=6.01 m<br><br>Ix=8.6 cm <sup>4</sup><br>Iy=14.42 cm <sup>4</sup>   |
| E40655                       |         | 730 g/m<br>L=6.01 m<br><br>Ix=0.71 cm <sup>4</sup><br>Iy=7 cm <sup>4</sup>        | E40590<br>PVC                |         | 1328 g/m<br>L=6.01 m<br><br>Ix=10.26 cm <sup>4</sup><br>Iy=18.28 cm <sup>4</sup> |
| E40656                       |         | 1524 g/m<br>L=6.01 m<br><br>Ix=8.84 cm <sup>4</sup><br>Iy=80.55 cm <sup>4</sup>   | E40171<br>reverse<br>profile |         | 1140 g/m<br>L=6.01 m<br><br>Ix=5.64 cm <sup>4</sup><br>Iy=10.42 cm <sup>4</sup>  |

L40-04



# opening system with thermal break















# E40

| code   |  | profile   | weight<br>length<br>moment of inertia  | code   |  | profile   | weight<br>length<br>moment of inertia |
|--------|---|---|--|--------|--|---|---------------------------------------|
| E40600 |   |    | 2038 g/m<br>L=6.01 m<br><br>$I_x=30.82 \text{ cm}^4$<br>$I_y=30.82 \text{ cm}^4$ | E2308  |  |    | 159 g/m<br>L=4.4m                     |
| E40601 |   |    | 1549 g/m<br>L=6.01 m<br><br>$I_x=18.87 \text{ cm}^4$<br>$I_y=12.44 \text{ cm}^4$ | E2357  |  |    | 144 g/m<br>L=6.01 m                   |
| E40602 |   |   | 203 g/m<br>L=6.01 m  | E40650 |  |   | 338 g/m<br>L=6.01 m                   |
| E40603 |   |  | 1276 g/m<br>L=6.01 m<br><br>$I_x=17.76 \text{ cm}^4$<br>$I_y=17.27 \text{ cm}^4$ | E40800 |  |  | 541 g/m<br>L=6.01 m                   |
| E40604 |   |  | 113 g/m<br>L=6.01 m  | E40801 |  |  | 528 g/m<br>L=6.01 m                   |
| E23600 |   |  | 66.5 g/m<br>L=6.01 m   | E40810 |  |  | 480 g/m<br>L=6.01 m                   |

L40-05

# opening system with thermal break




# E40

| code   |  | profile   | weight<br>length<br>moment of inertia                                     | code   |  | profile   | weight<br>length<br>moment of inertia                                     |
|--------|---|---|---|--------|--|---|---|
| E40811 |   |    | 555 g/m<br>L=6.01 m   | E1115  |  |    | 408 g/m<br>L=6.01 m<br>$I_x=4.77 \text{ cm}^4$<br>$I_y=3.37 \text{ cm}^4$ |
| E40812 |   |    | 135 g/m<br>L=6.01 m   | E1127  |  |    | 288 g/m<br>L=6.01 m<br>$I_x=1.28 \text{ cm}^4$<br>$I_y=2.39 \text{ cm}^4$ |
| E40813 |   |   | 265 g/m<br>L=6.01 m   | E40607 |  |   | 494 g/m<br>L=6.01 m<br>$I_x=6.67 \text{ cm}^4$<br>$I_y=2.22 \text{ cm}^4$ |
| E40820 |   |  | 143 g/m<br>L=6.01 m   | E40651 |  |  | 203 g/m<br>L=6.01 m   |
| E40605 |   |  | 381 g/m<br>L=6.01 m<br>$I_x=3.7 \text{ cm}^4$<br>$I_y=1.56 \text{ cm}^4$  | E40660 |  |  | 564 g/m<br>L=6.01 m<br>$I_x=0.83 \text{ cm}^4$<br>$I_y=5.27 \text{ cm}^4$ |
| E5366  |   |  | 269 g/m<br>L=6.01 m<br>$I_x=1.53 \text{ cm}^4$<br>$I_y=1.37 \text{ cm}^4$ | E40821 |  |  | 416 g/m<br>L=6.01 m   |

L40-06

# opening system with thermal break

# E40


| code   |  | profile   | weight<br>length<br>moment of inertia | code |  | profile | weight<br>length<br>moment of inertia |
|--------|---|---|---------------------------------------|------|--|---------|---------------------------------------|
| E40910 |   |  | 427 g/m<br>L=6.01 m                   |      |  |         |                                       |
|        |   |   |                                       |      |  |         |                                       |
|        |   |   |                                       |      |  |         |                                       |
|        |   |   |                                       |      |  |         |                                       |
|        |   |   |                                       |      |  |         |                                       |
|        |   |   |                                       |      |  |         |                                       |

L40-07


# PROFILES

DRAWINGS / SCALE 1:1


E40100  
913 g/m

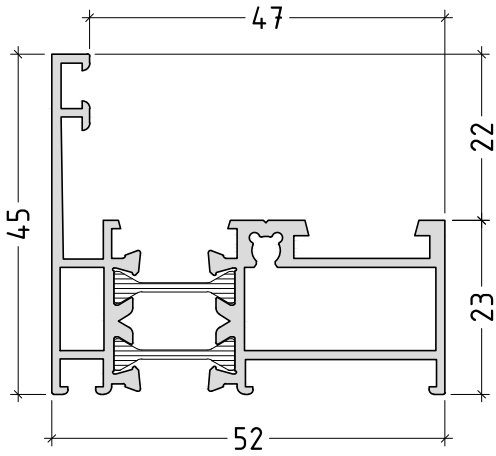


E40101  
1094 g/m

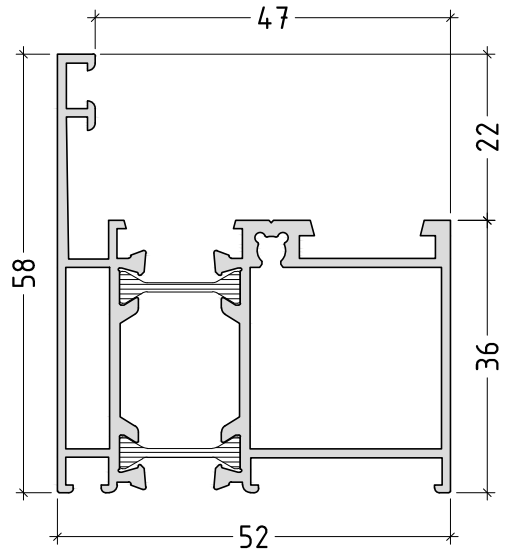

E40102  
1205 g/m

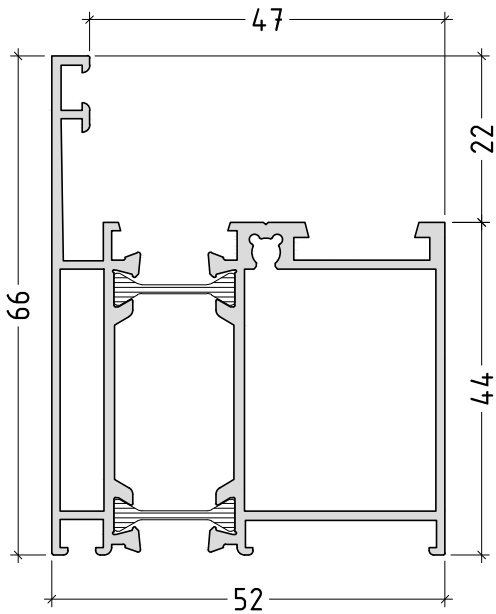


E40185  
972 g/m

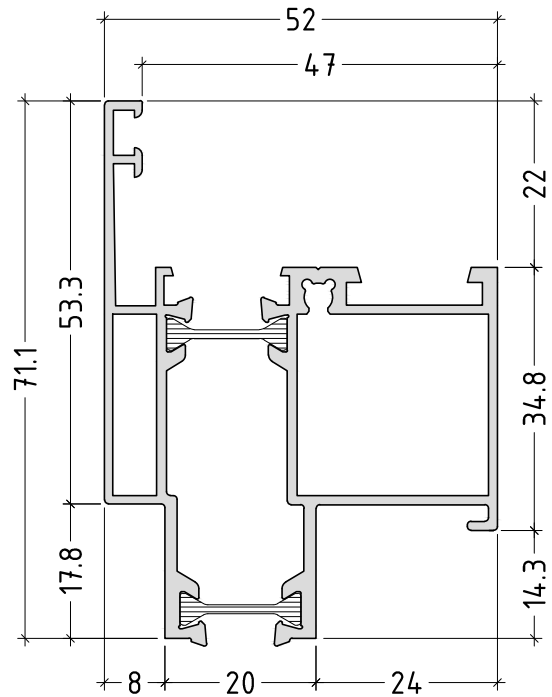


scale : 1:1

E40121  
1276 g/m

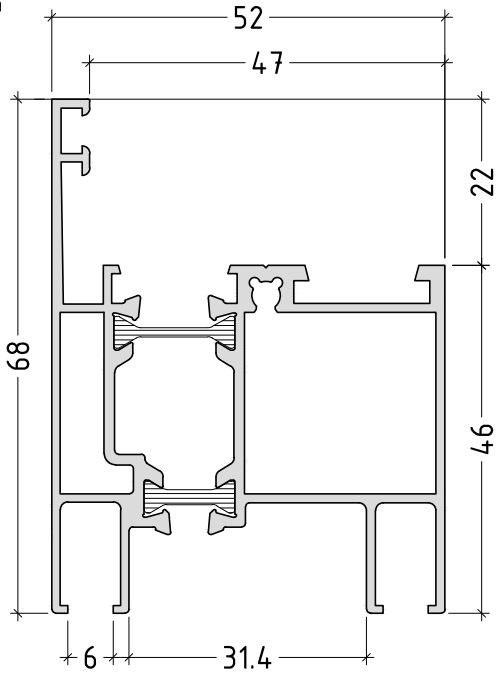


E40130  
2500 g/m

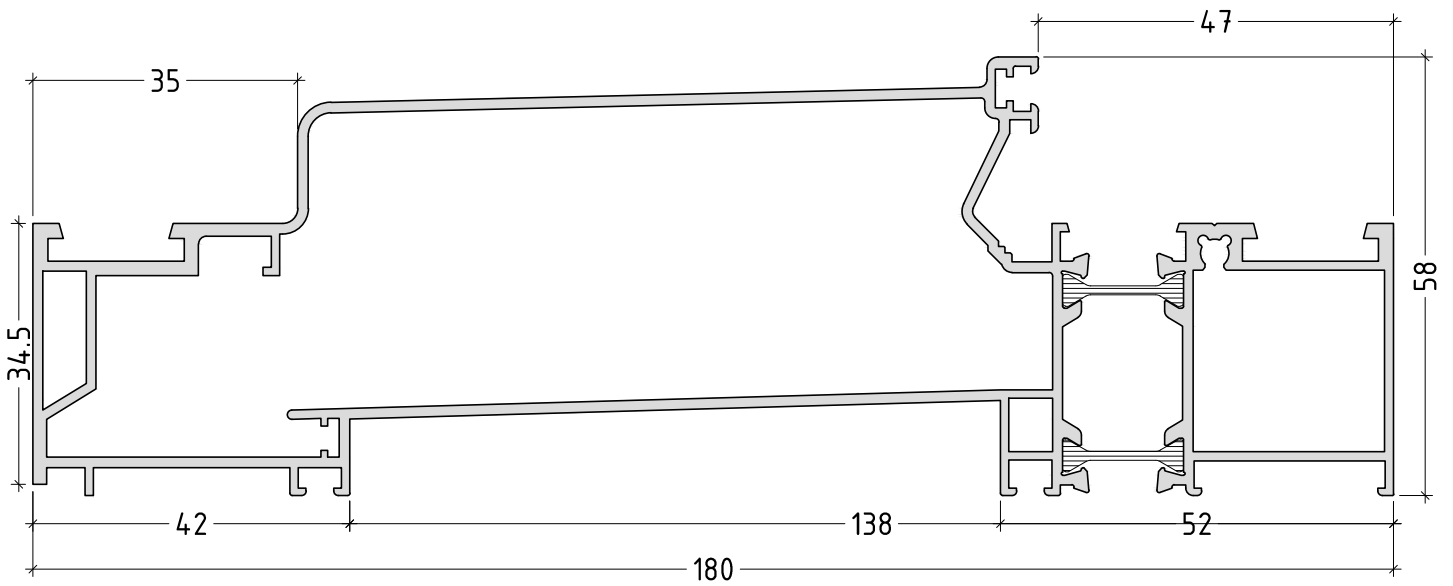


scale : 1:1


E40135  
1627 g/m

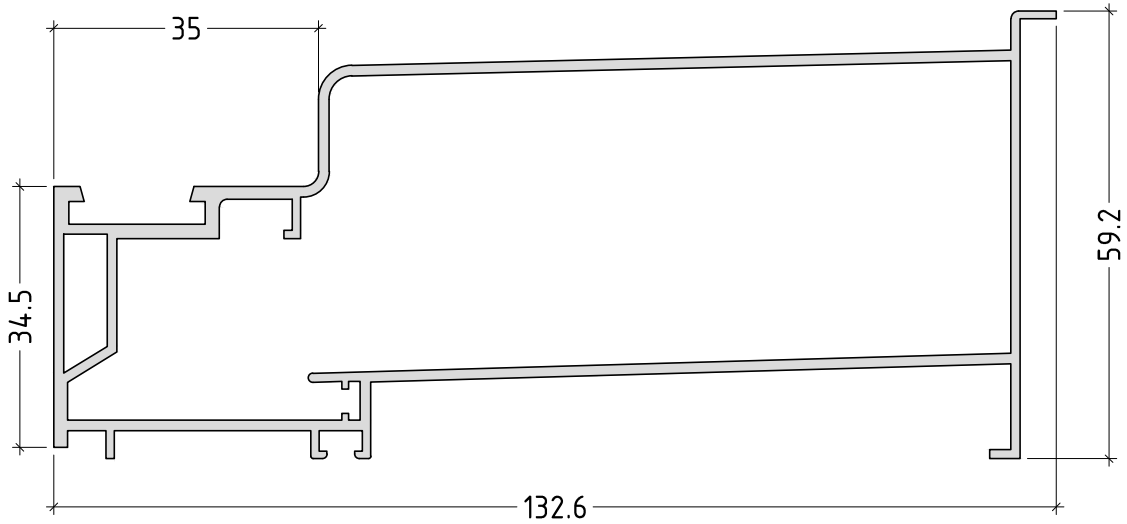

E40150  
1001 g/m

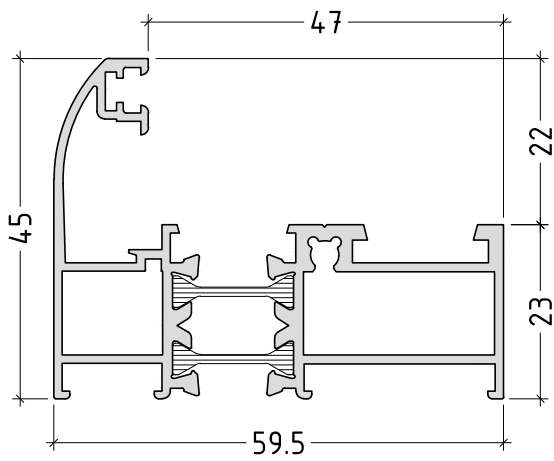


E40151  
1183 g/m

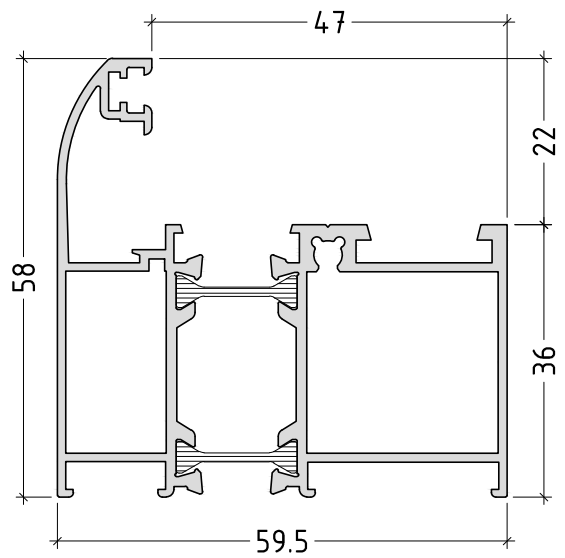


scale : 1:1


E40152  
1294 g/m

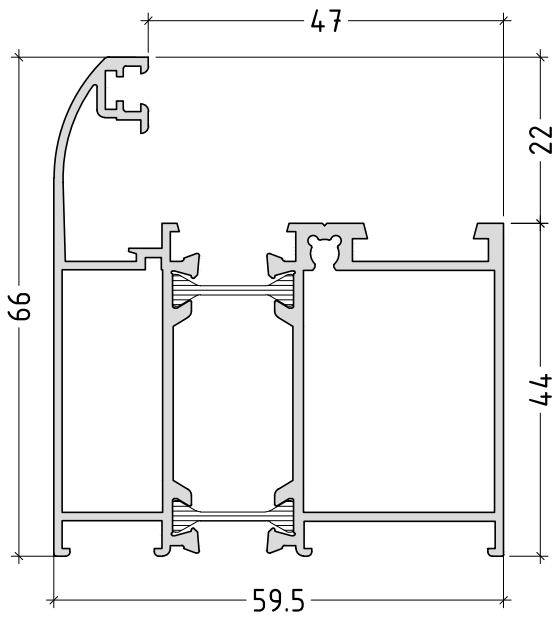

E40154  
1350 g/m

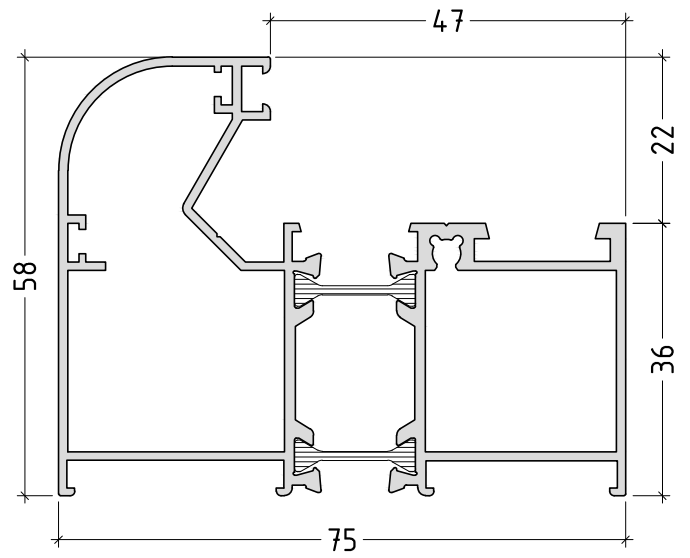


E40153  
1513 g/m

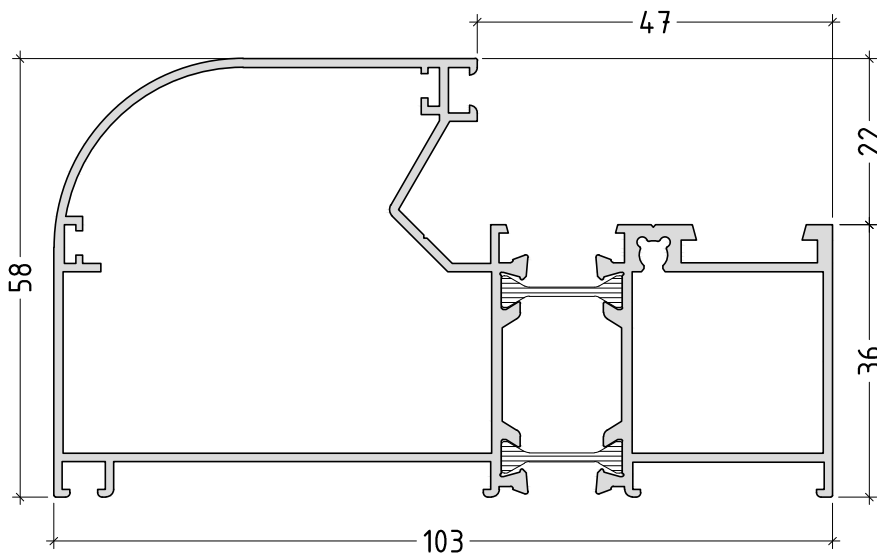


scale : 1:1




E40180  
972 g/m

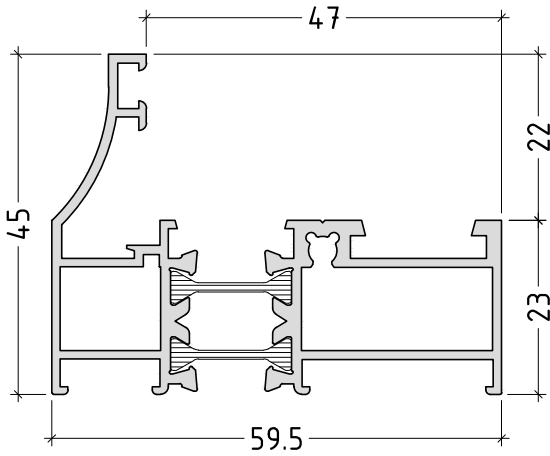


E40200  
1125 g/m

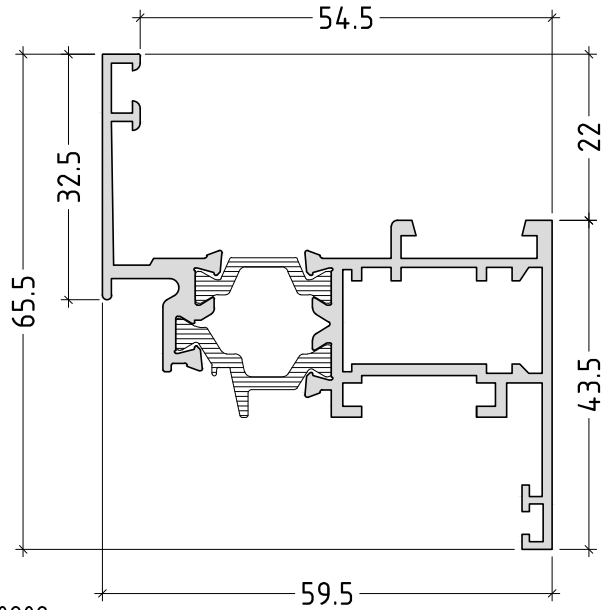

E40201  
1251 g/m

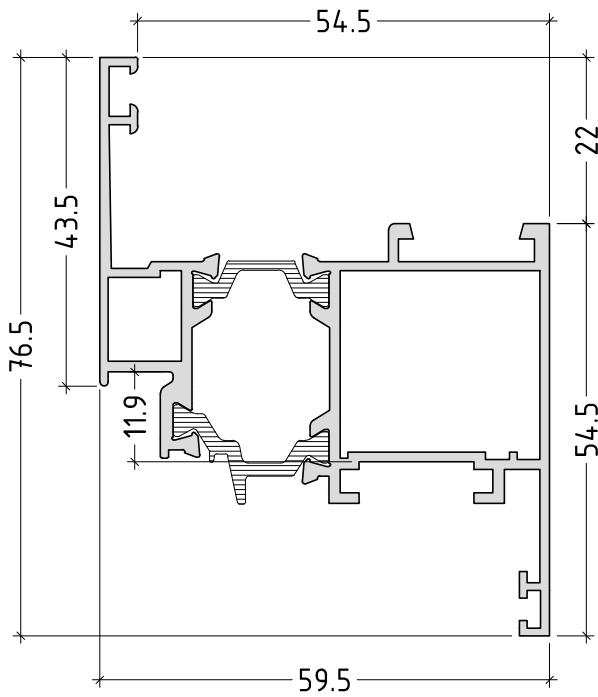


E40202  
1554 g/m

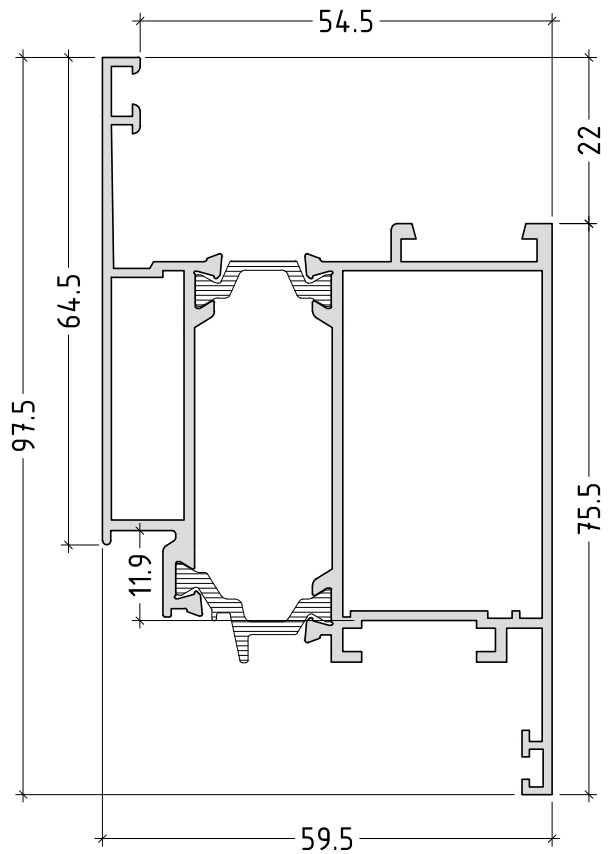


scale : 1:1

P40-05


E40250  
1154 g/m

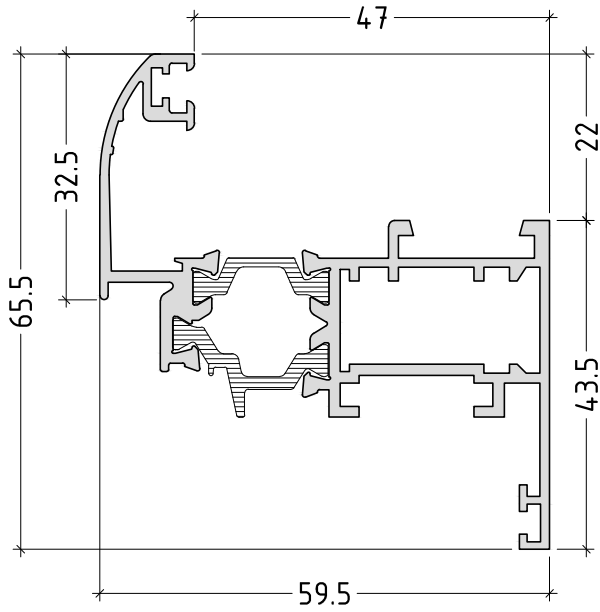


E40251  
1283 g/m

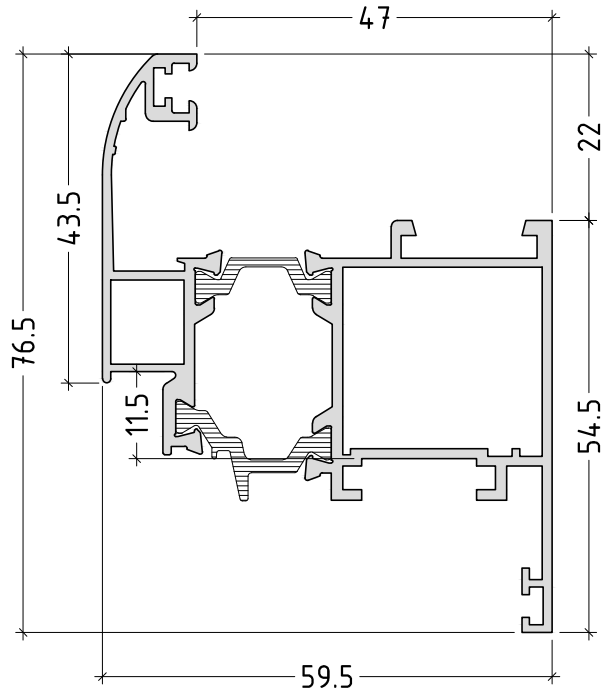

E40252  
1586 g/m

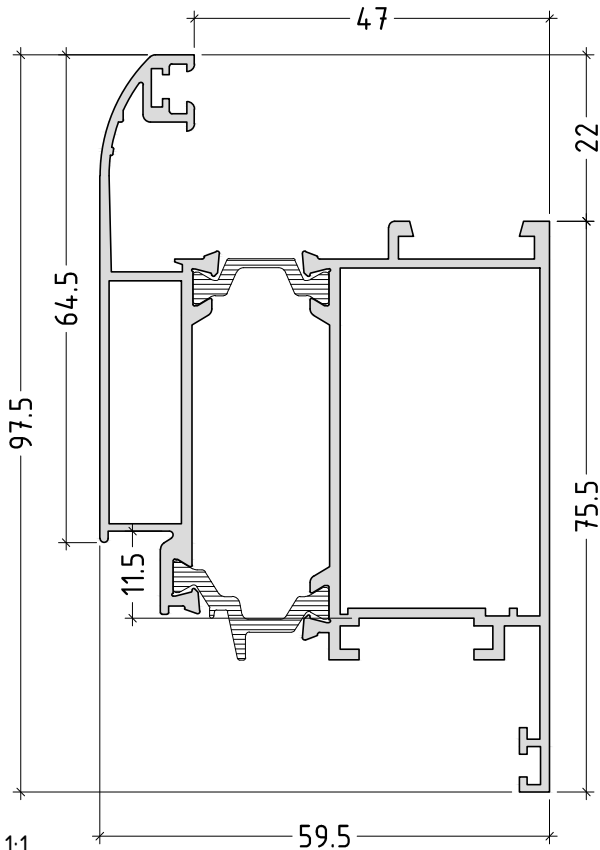


E40281  
1238 g/m

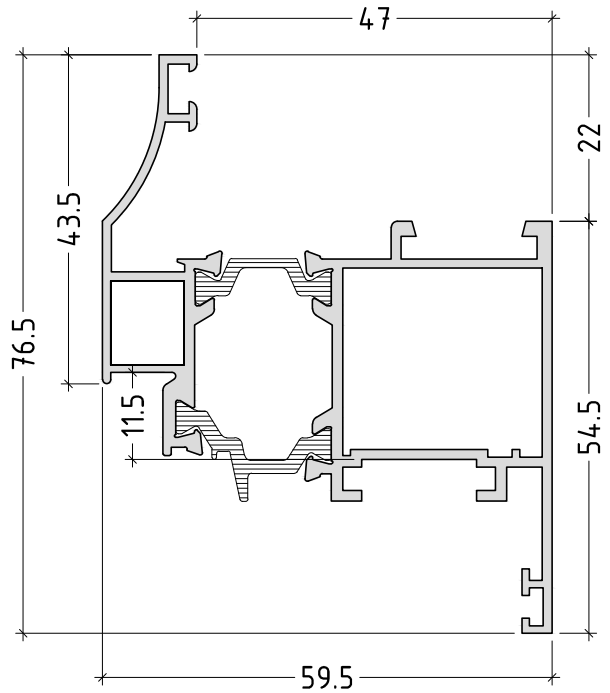


scale : 1:1

P40-06


E40241  
1481 g/m

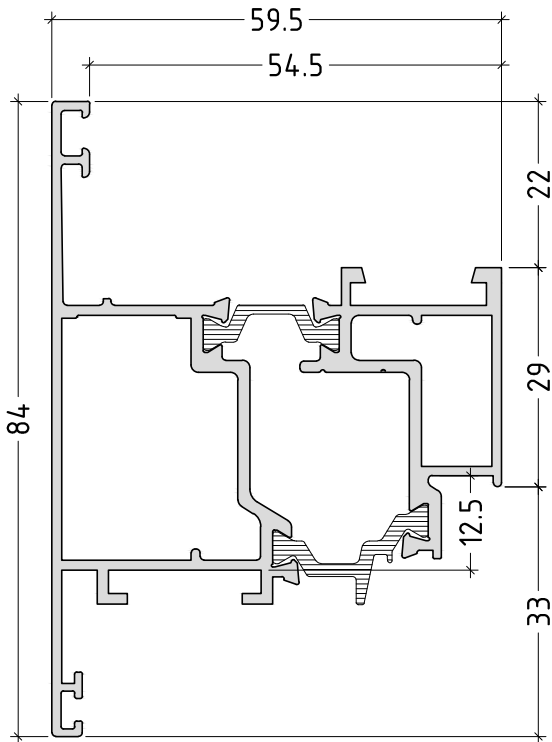


E40240  
1548 g/m

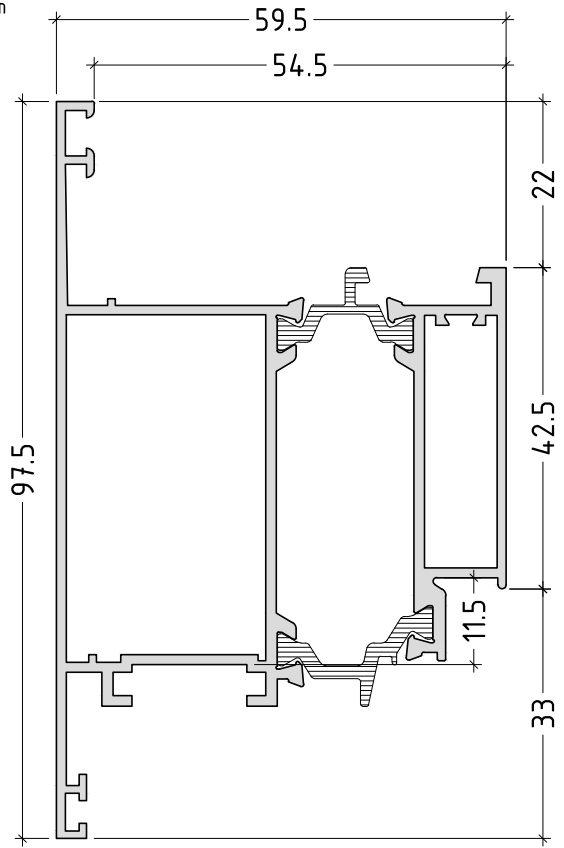

E40290  
1601 g/m

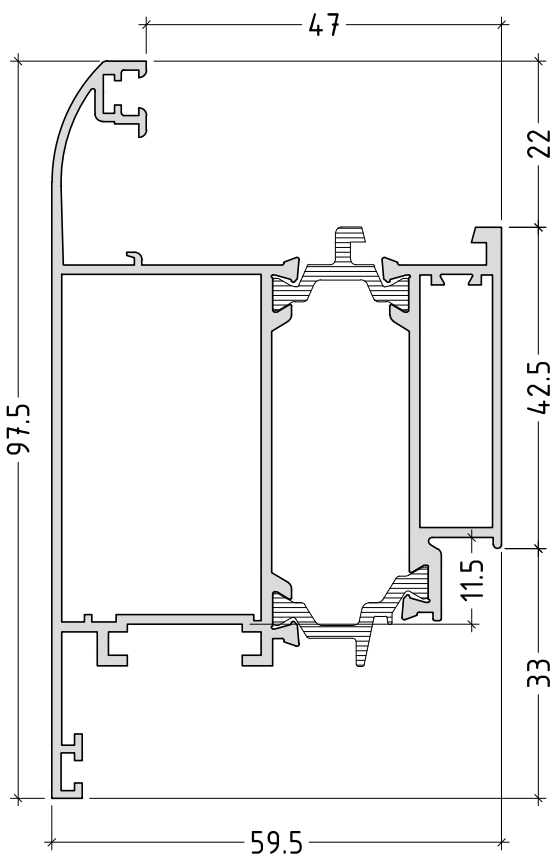


E40221 PVC  
1374 g/m

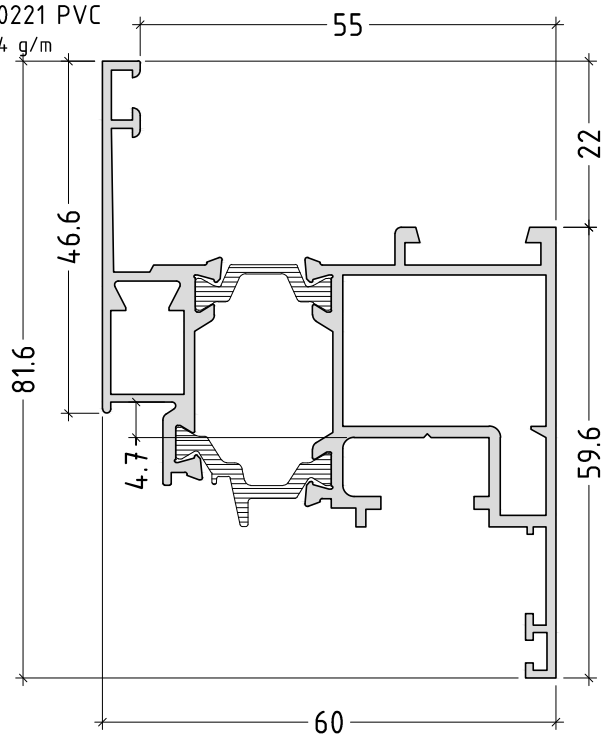


scale : 1:1


E40222 PVC  
1792 g/m

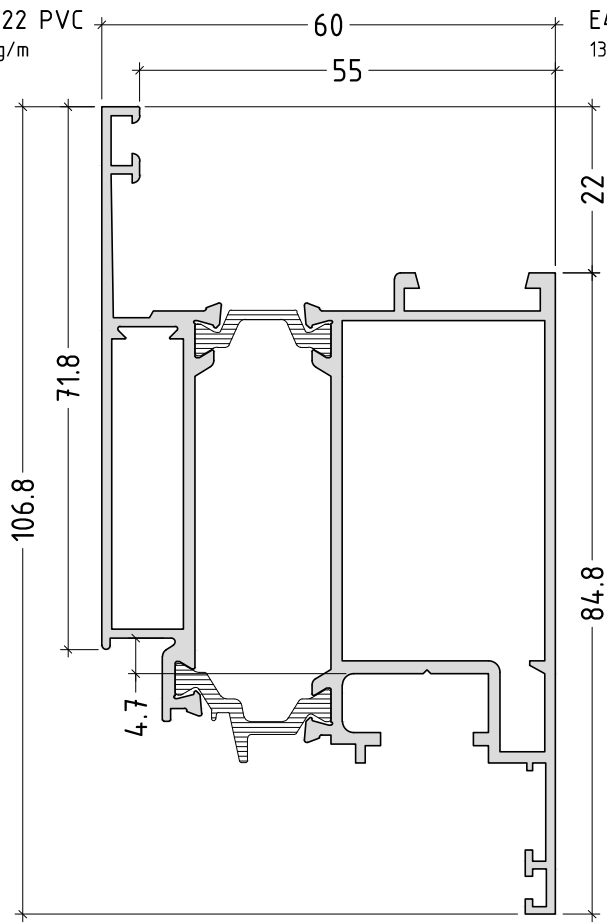


E40271 PVC  
1395 g/m

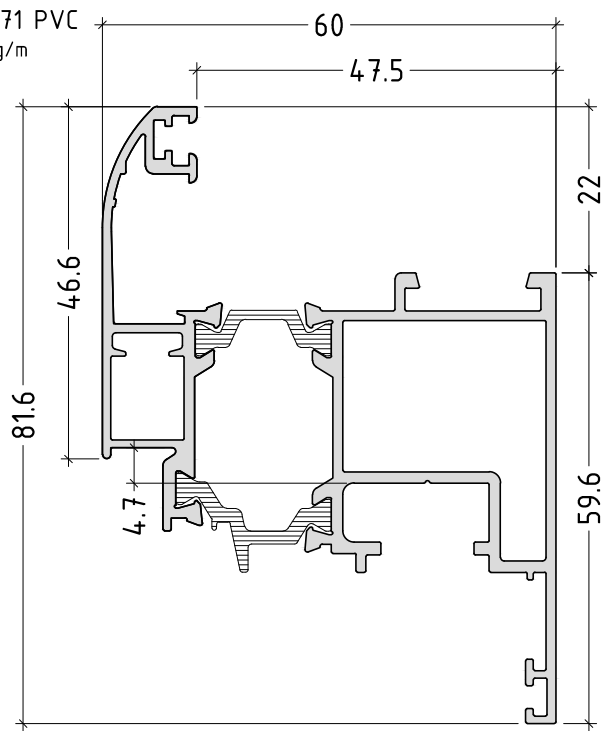

E40272 PVC  
1824 g/m

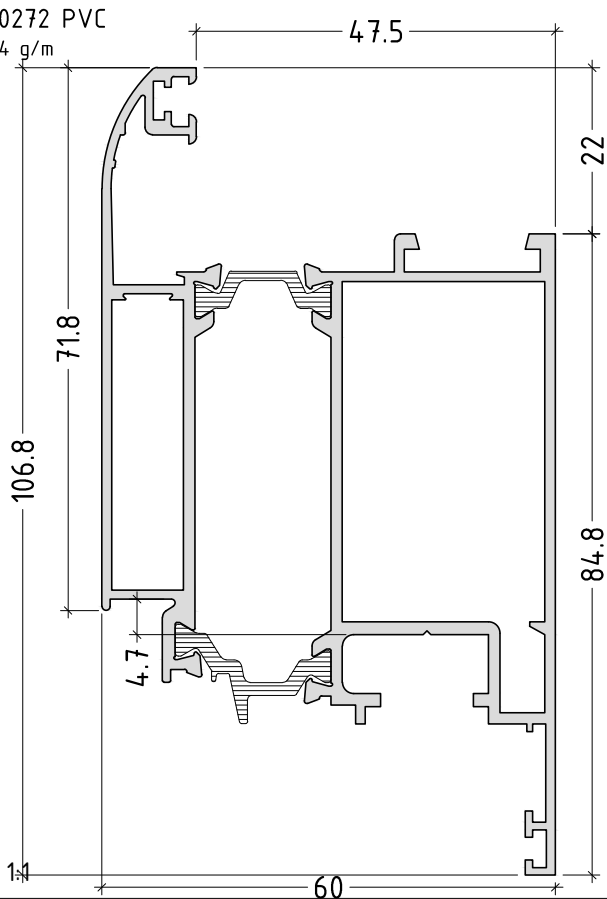


E40295 PVC  
1831 g/m

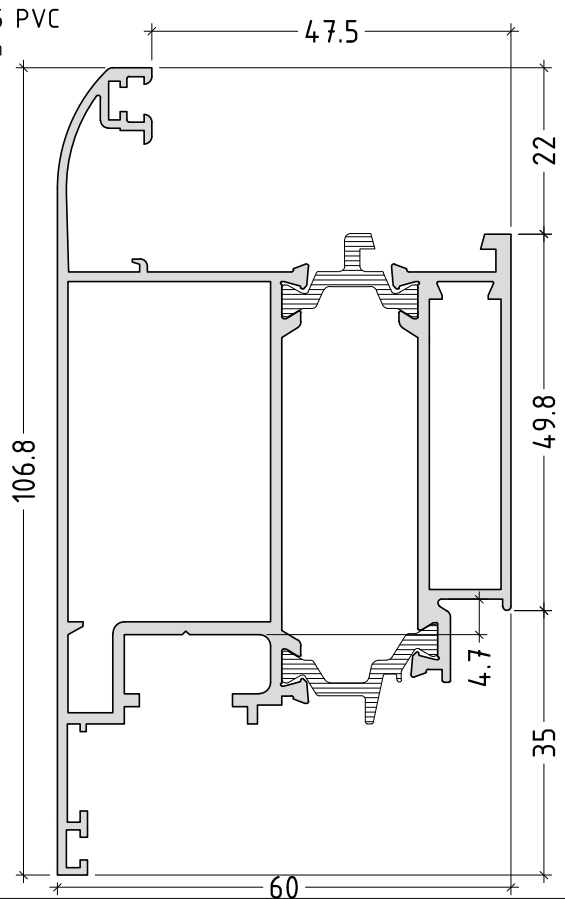


scale : 1:1

P40-08


E40275 PVC  
1359 g/m

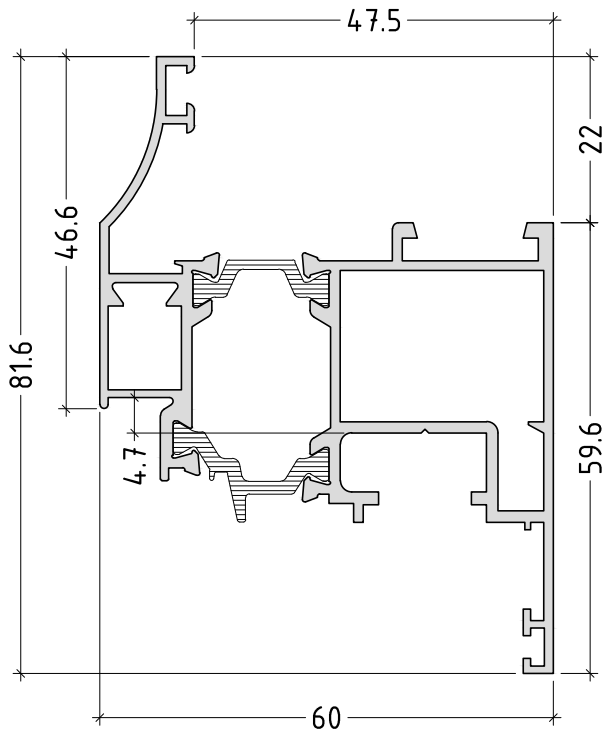


E40230 pivot mech.  
1460 g/m

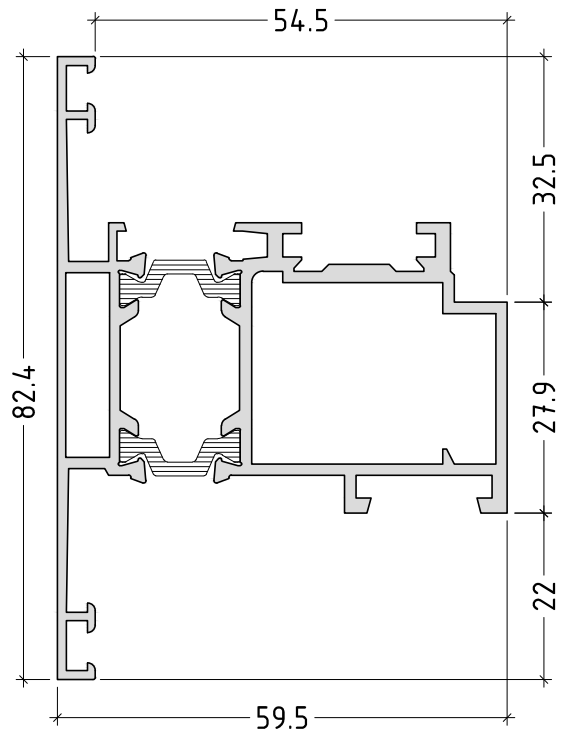

E40530 pivot mech.  
1099 g/m

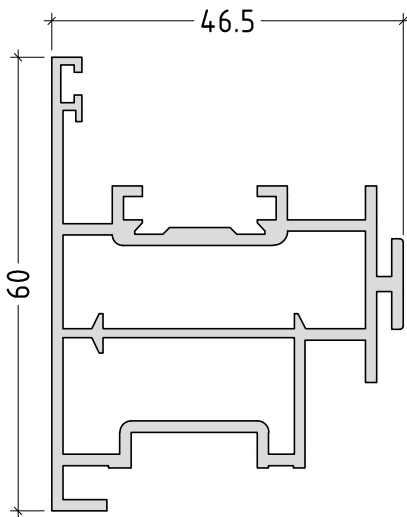


E40300  
1114 g/m

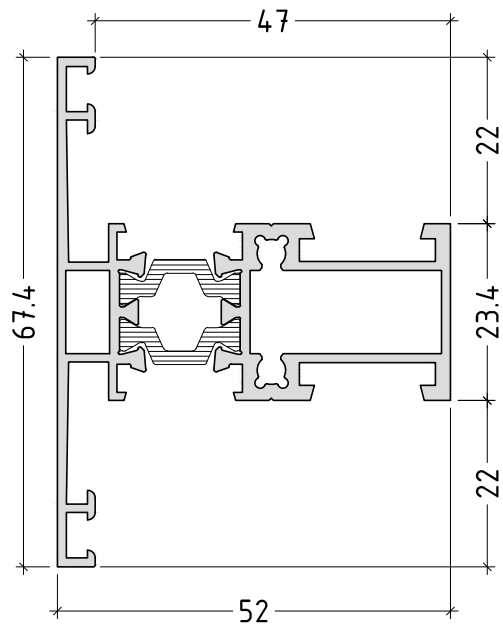


scale : 1:1


E40301  
1316 g/m

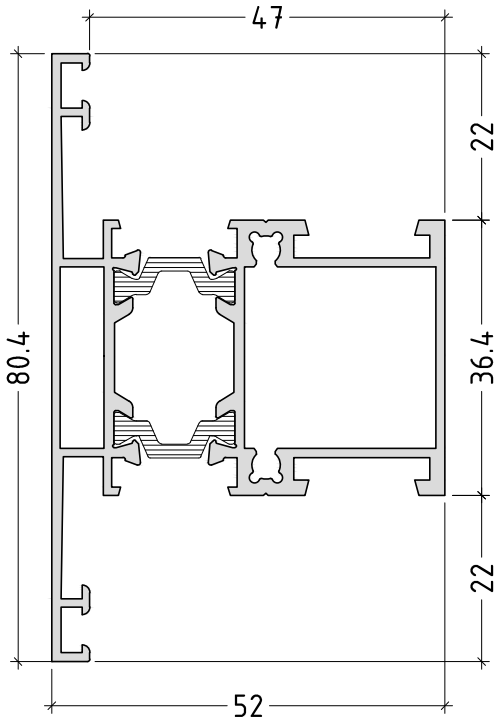



E40350  
1409 g/m

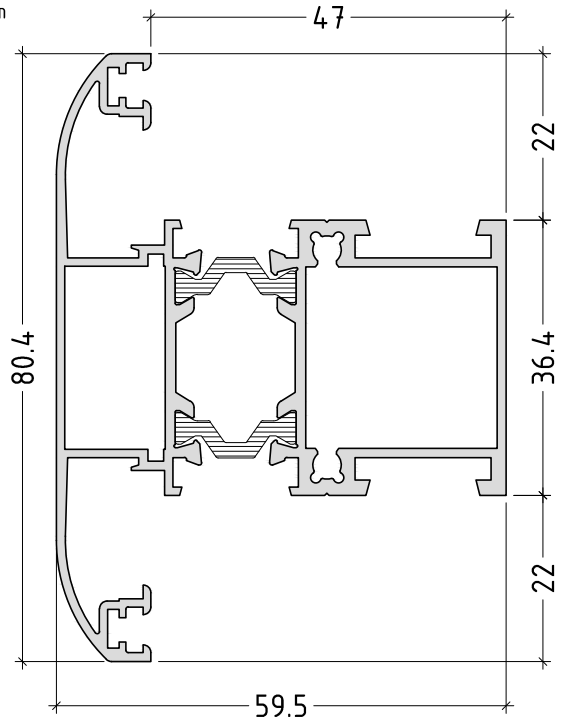


E40302  
1997 g/m

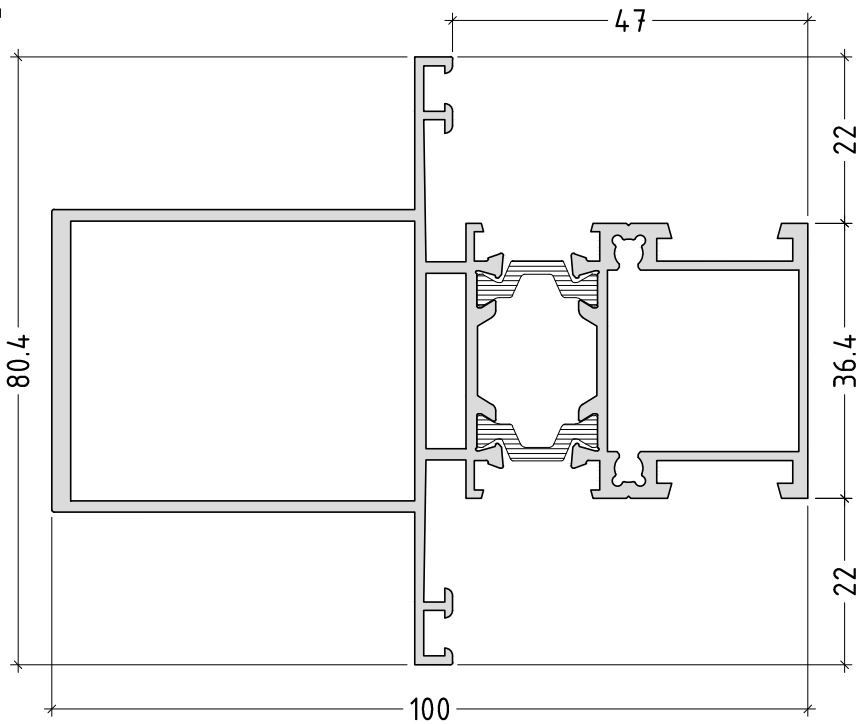

scale : 1:1

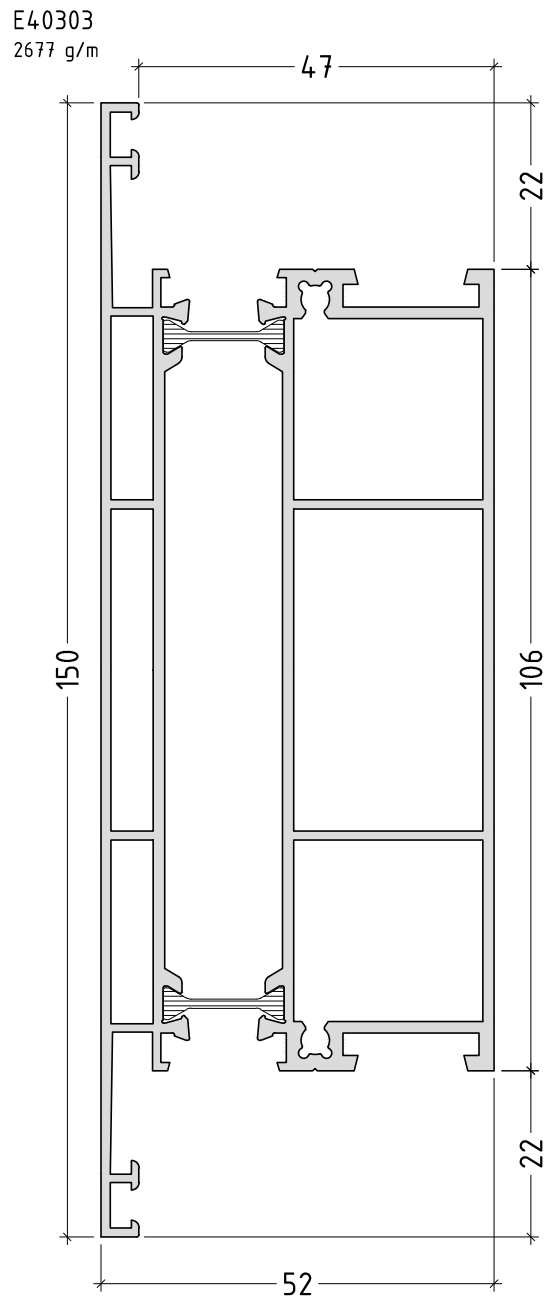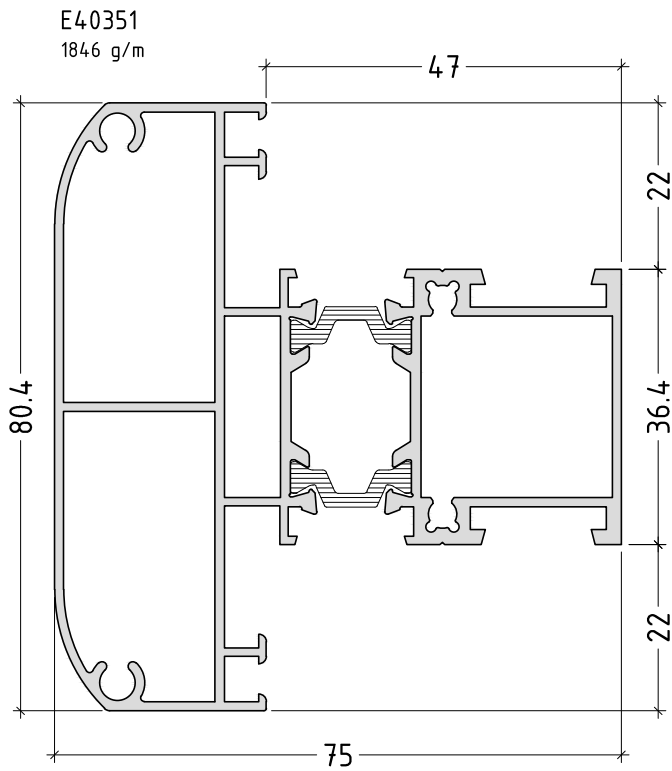


E40340 straight sashes  
1330 g/m

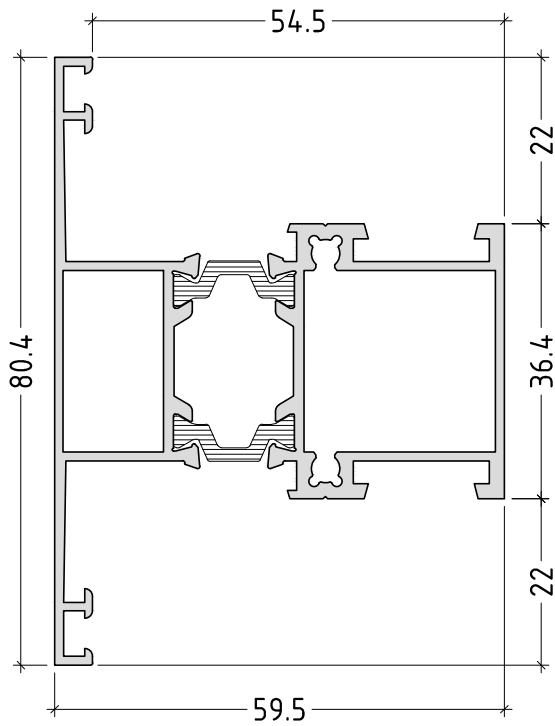


scale : 1:1


E40331  
2248 g/m

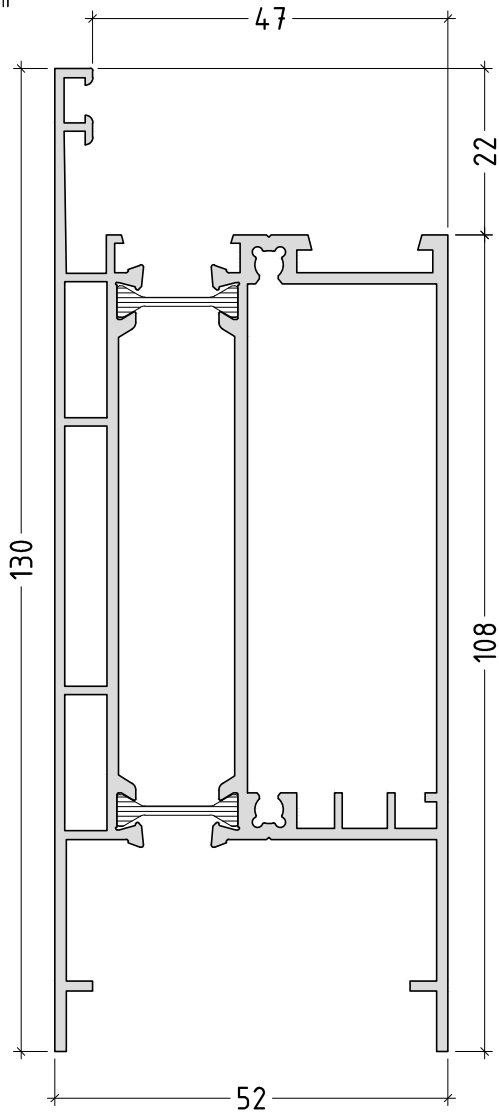


E40330 straight sashes  
2363 g/m

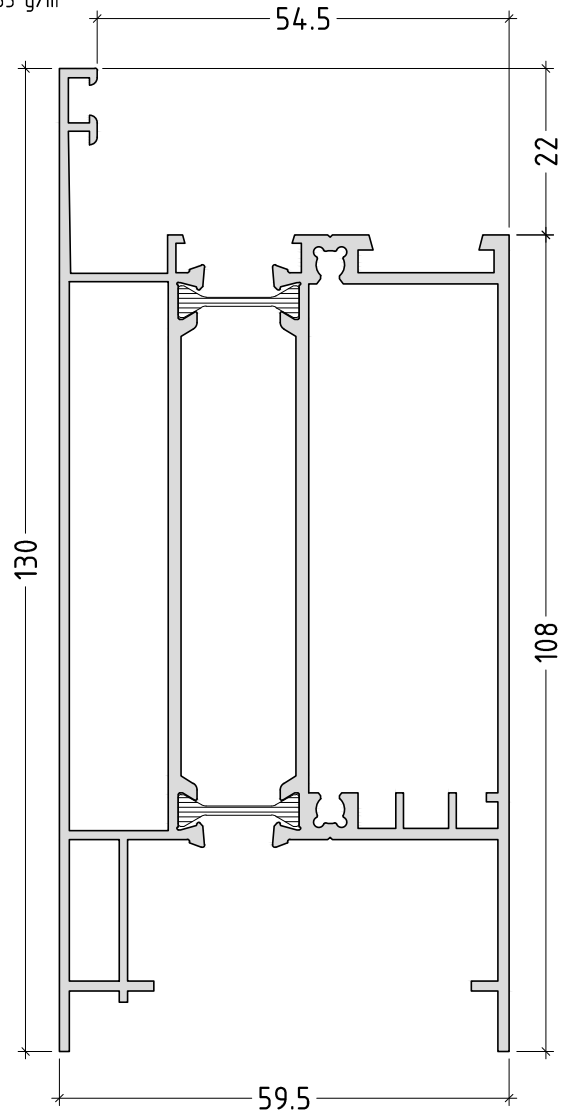

E40656  
1524 g/m

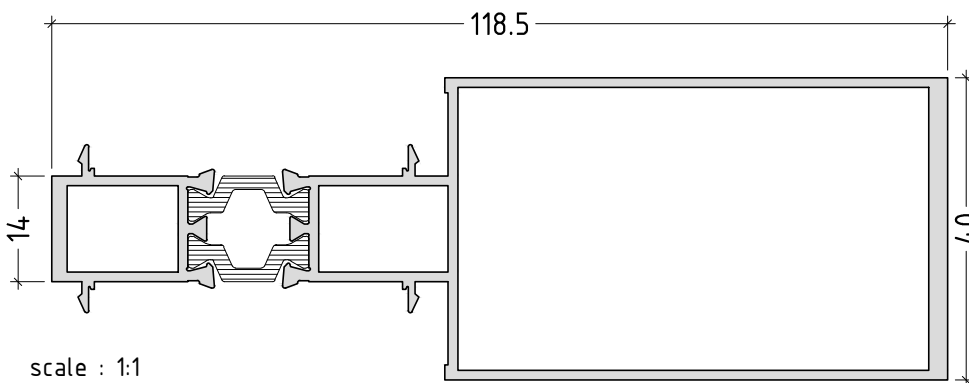

E40655  
730 g/m

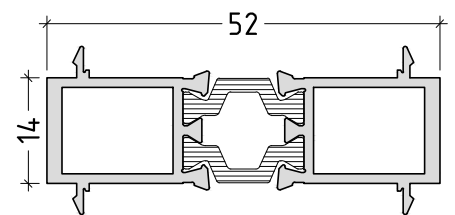


scale : 1:1


P40-12




E40500  
1194 g/m

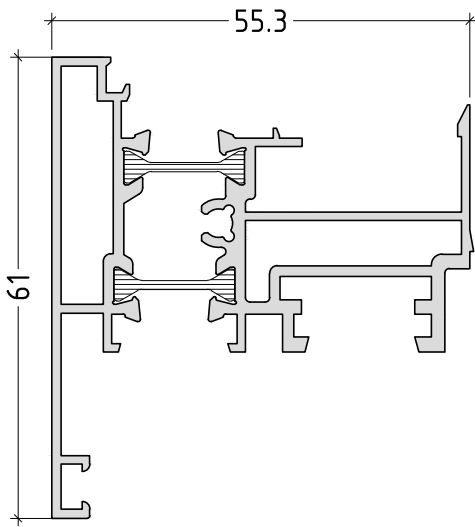


E40550  
1264 g/m

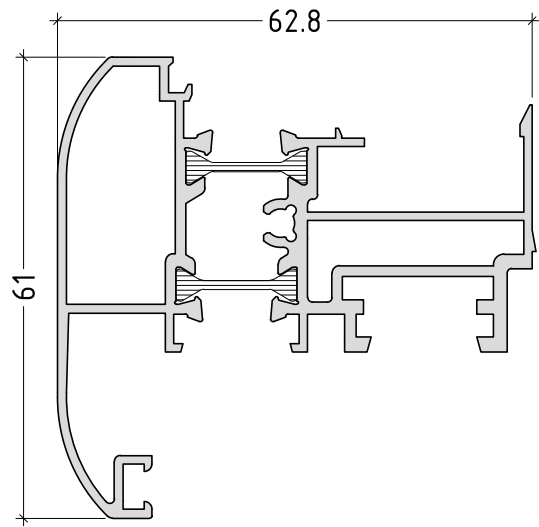

E40580  
1238 g/m

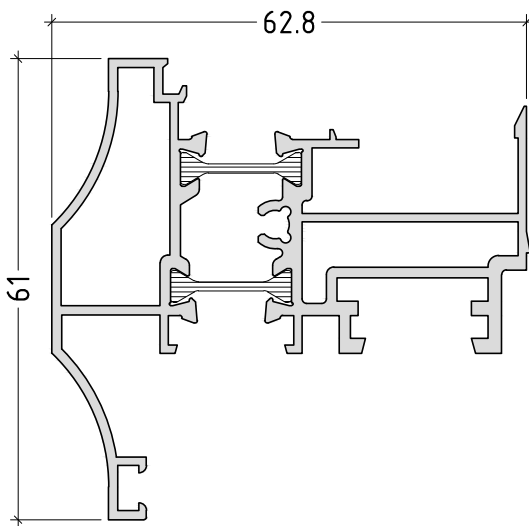


E40540 PVC  
1187 g/m

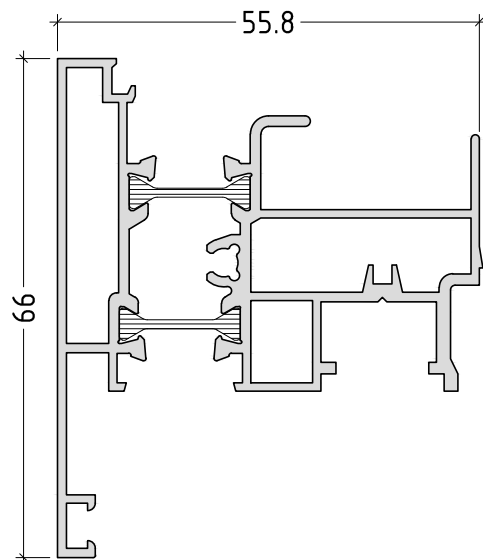


scale : 1:1


E40590 PVC  
1328 g/m

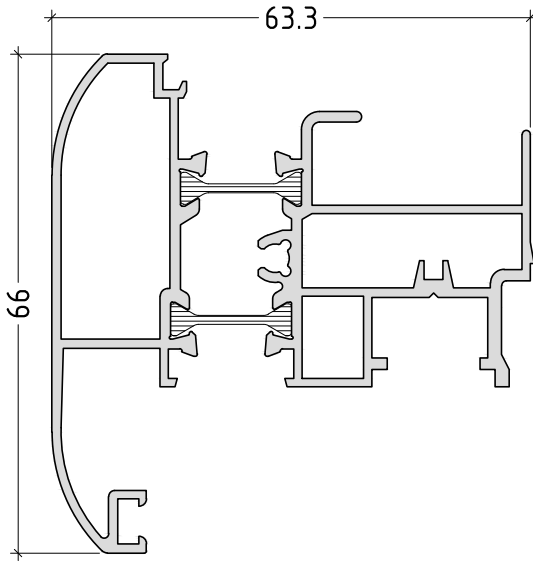


E40171 reverse profile  
1140 g/m

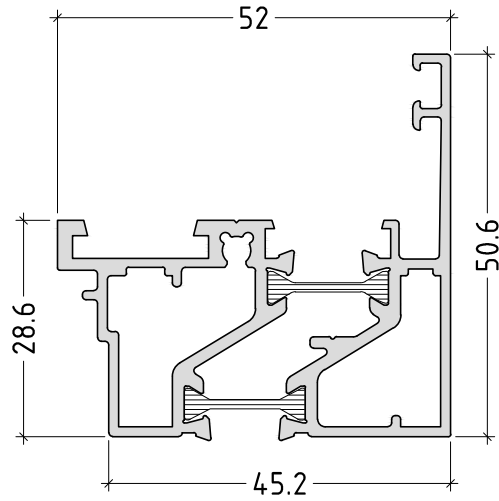

E40600  
2038 g/m

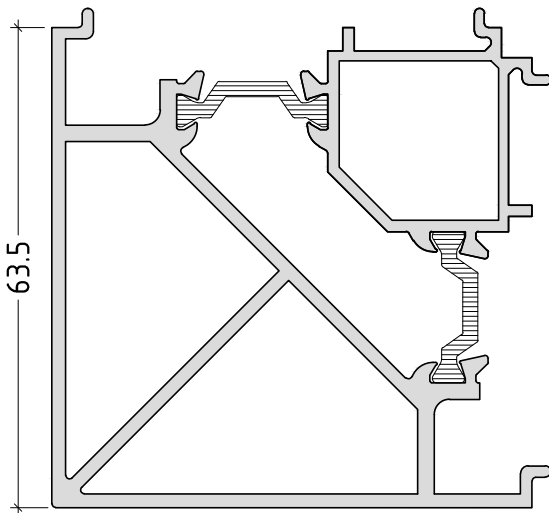


E40601  
1549 g/m

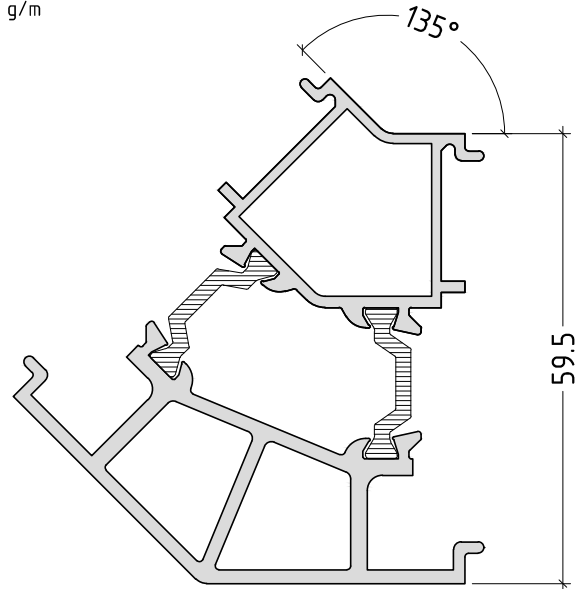


scale : 1:1


E40602  
203 g/m




E40603  
1276 g/m

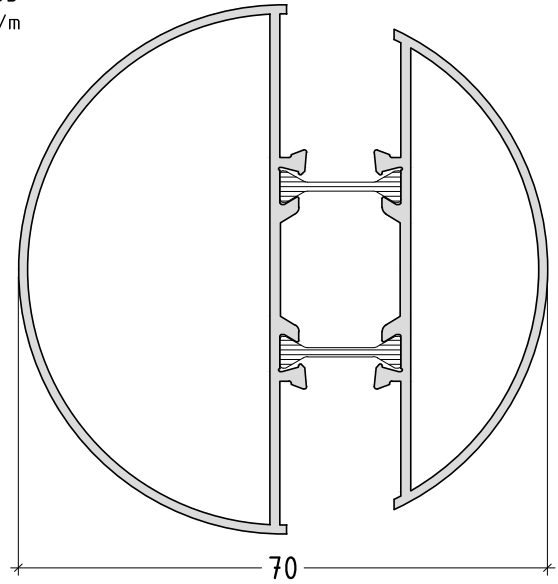


E40604  
113 g/m




E23600  
66.5 g/m




E2308  
159 g/m




E2357  
144 g/m




E40650  
338 g/m



E40800  
541 g/m

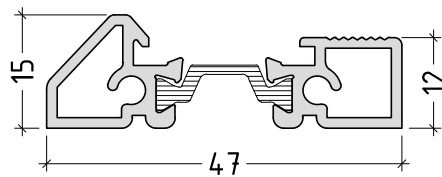


E40801  
528 g/m

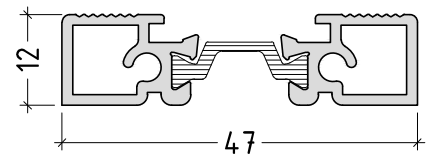


scale : 1:1


E40810  
480 g/m

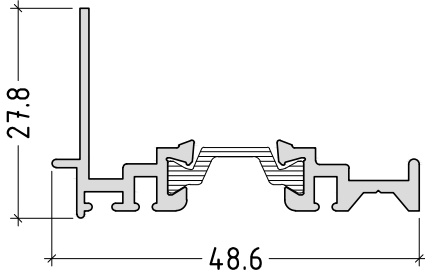


E40811  
555 g/m

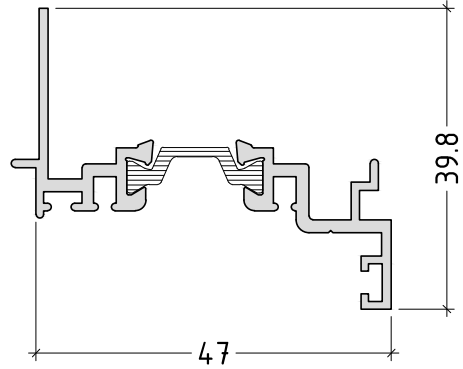


E40812  
135 g/m




E40813  
265 g/m




E40820  
143 g/m




E40605  
381 g/m

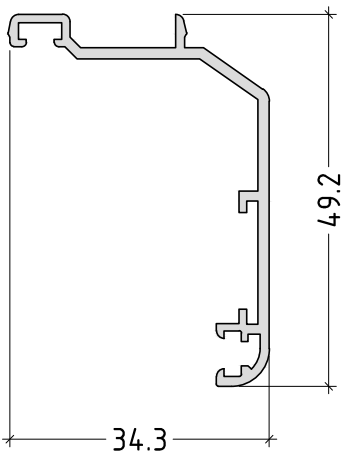

E5366  
269 g/m




E1115  
408 g/m

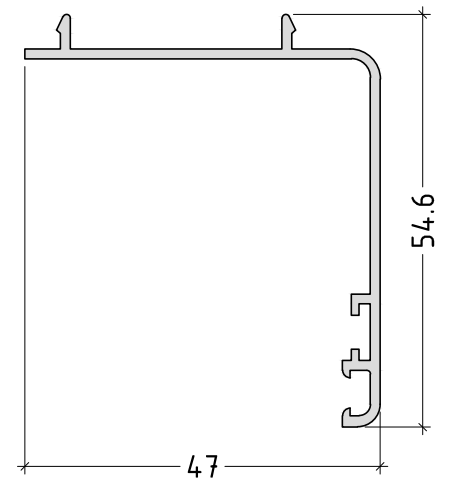


scale : 1:1


E1127  
288 g/m

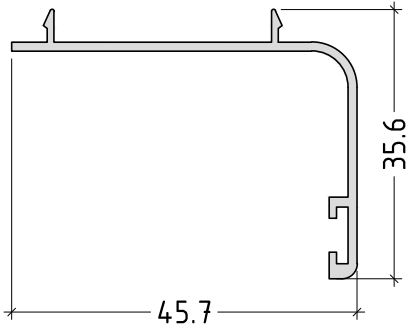


E40607  
494 g/m

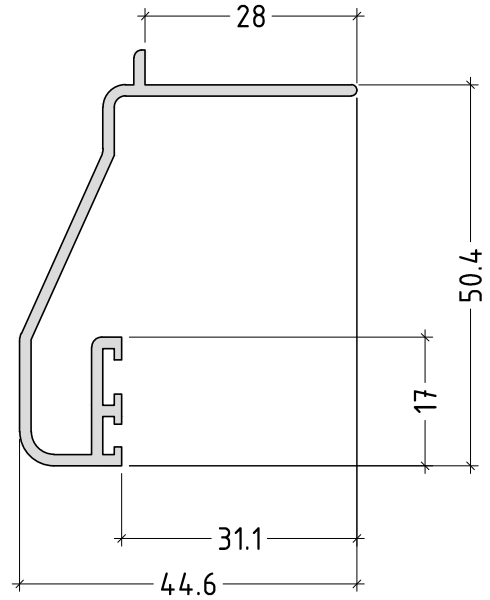


E40651  
203 g/m




E40660  
564 g/m

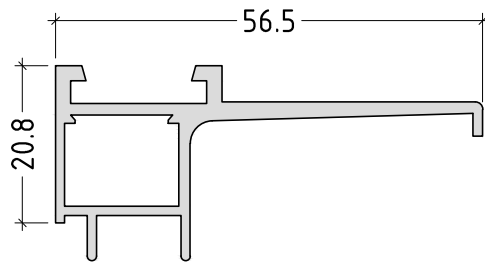

E40821  
416 g/m

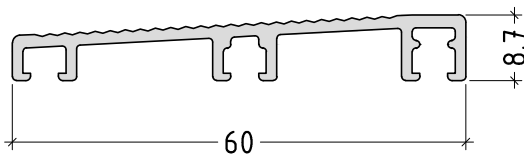

E40910  
427 g/m




scale : 1:1


# SECTIONS

SECTIONS / DETAILS

inward opening





①

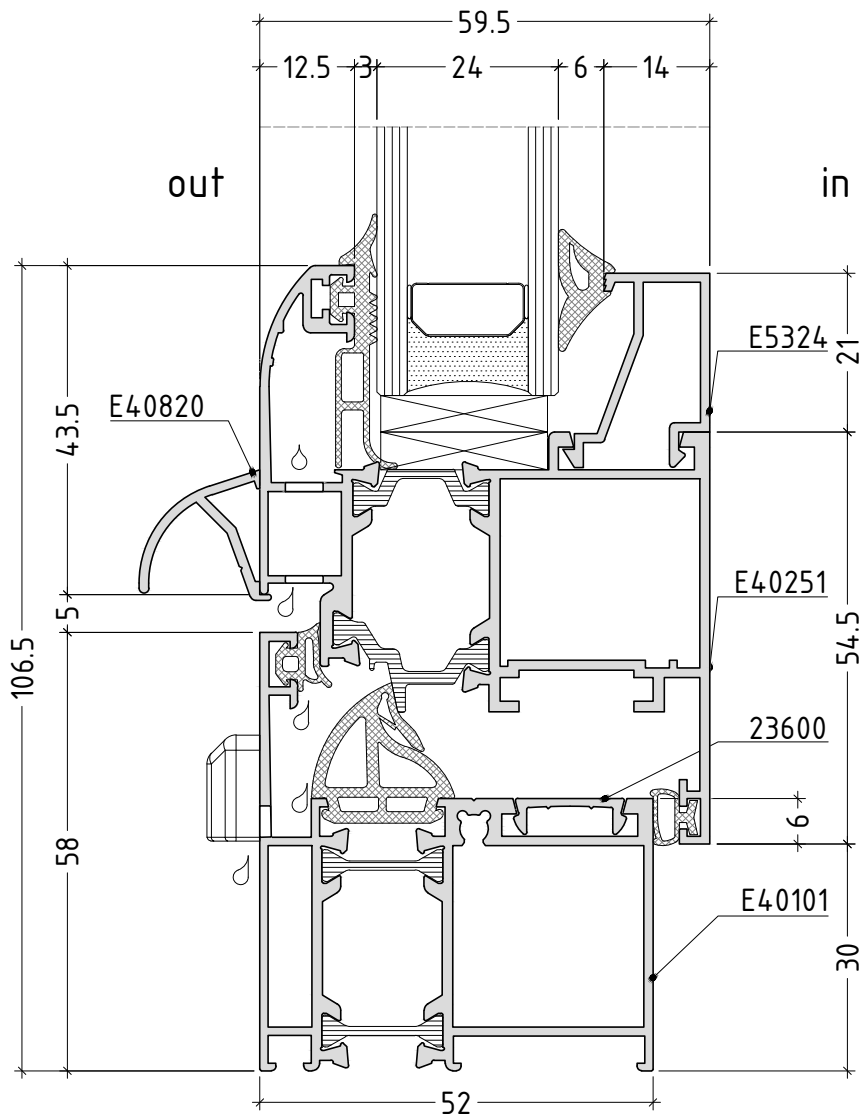

scale : 1:1




inward opening

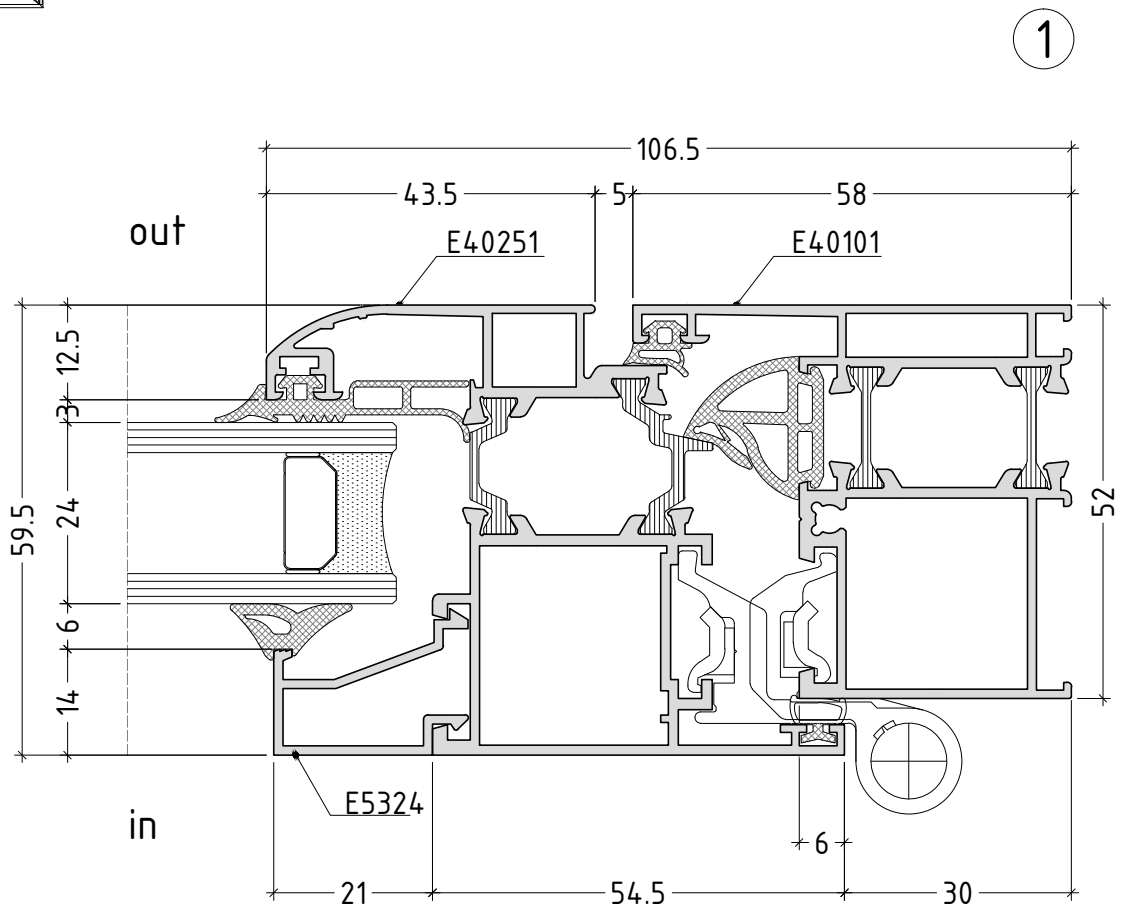

scale : 1:1





fix  
position

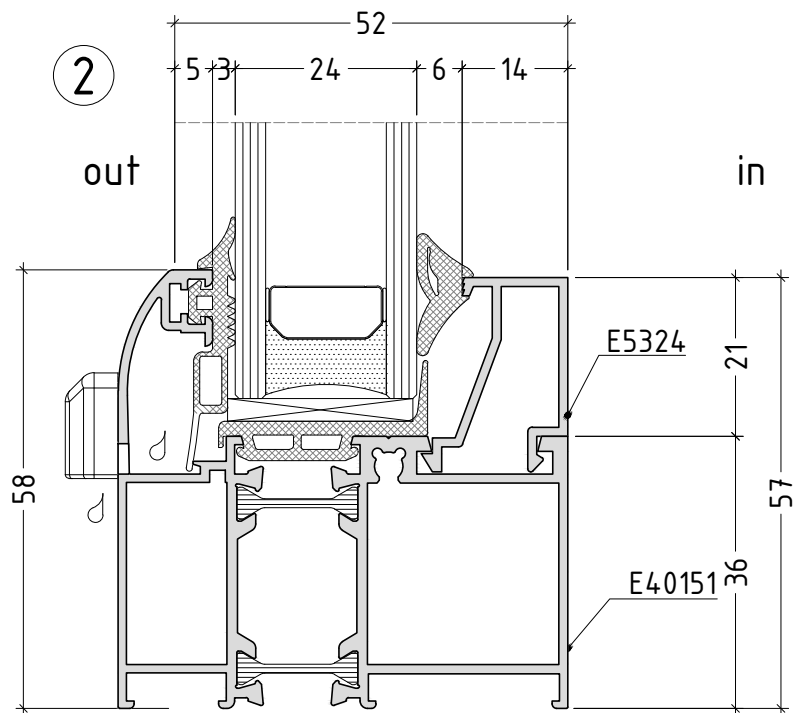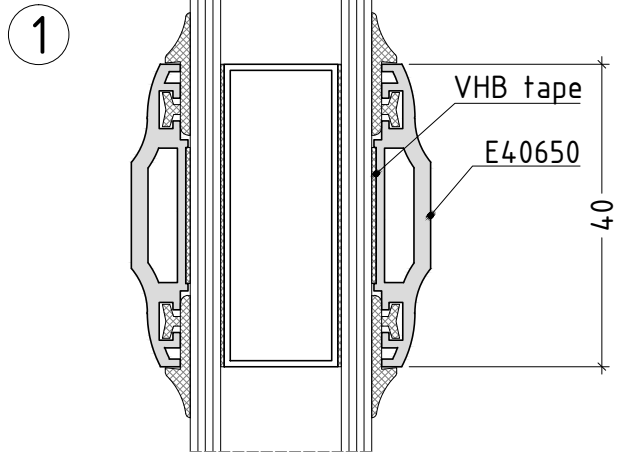

scale : 1:1




inward opening

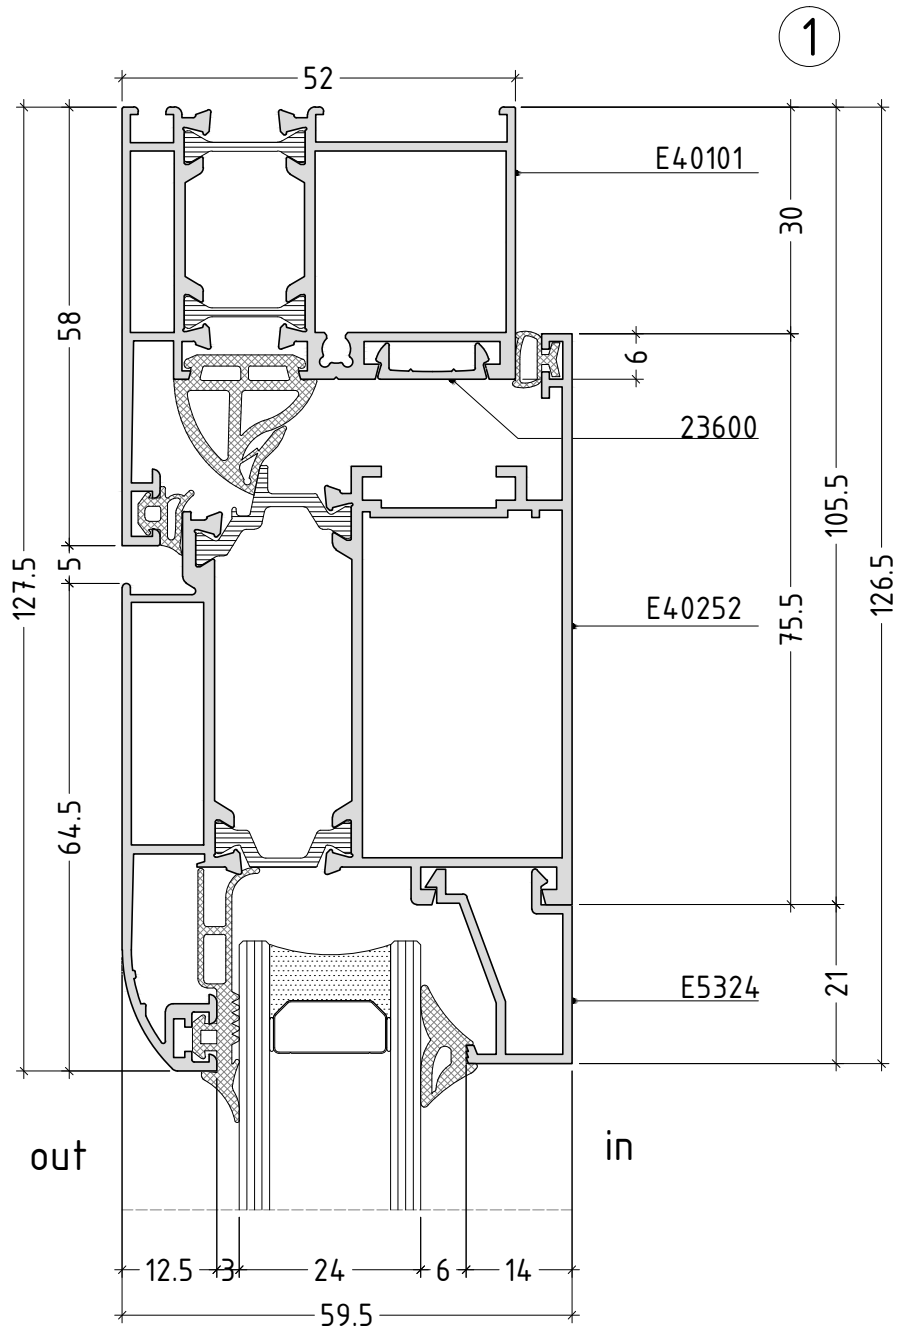



scale : 1:1

inward opening




②

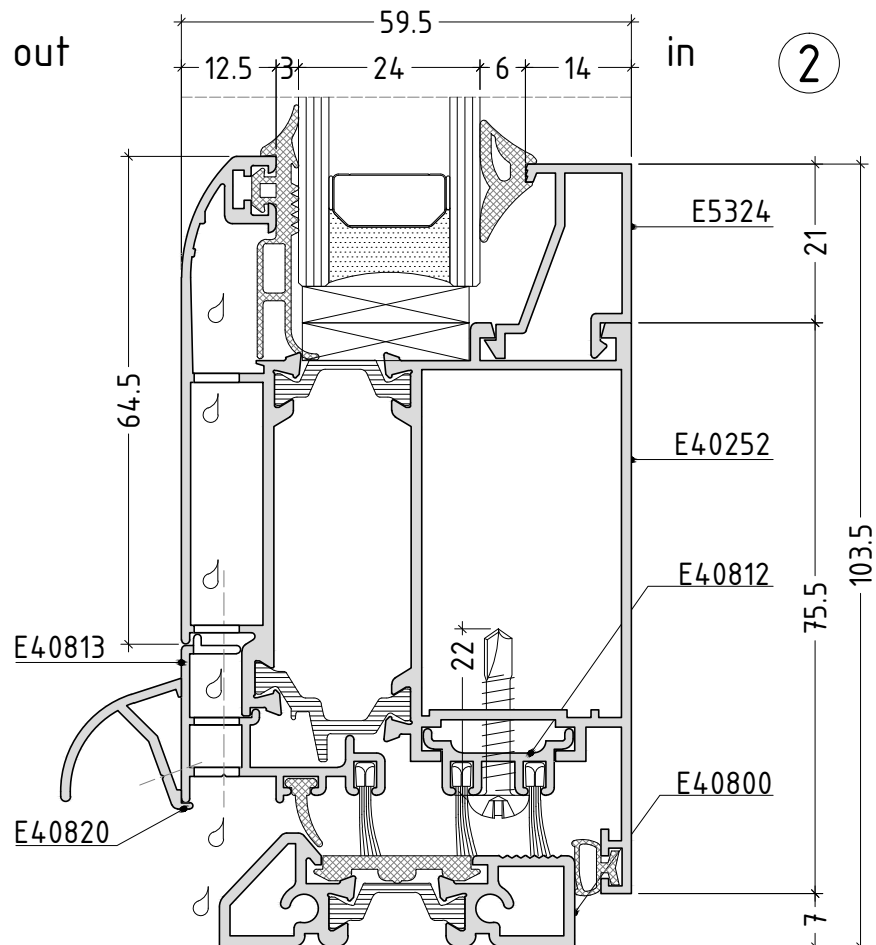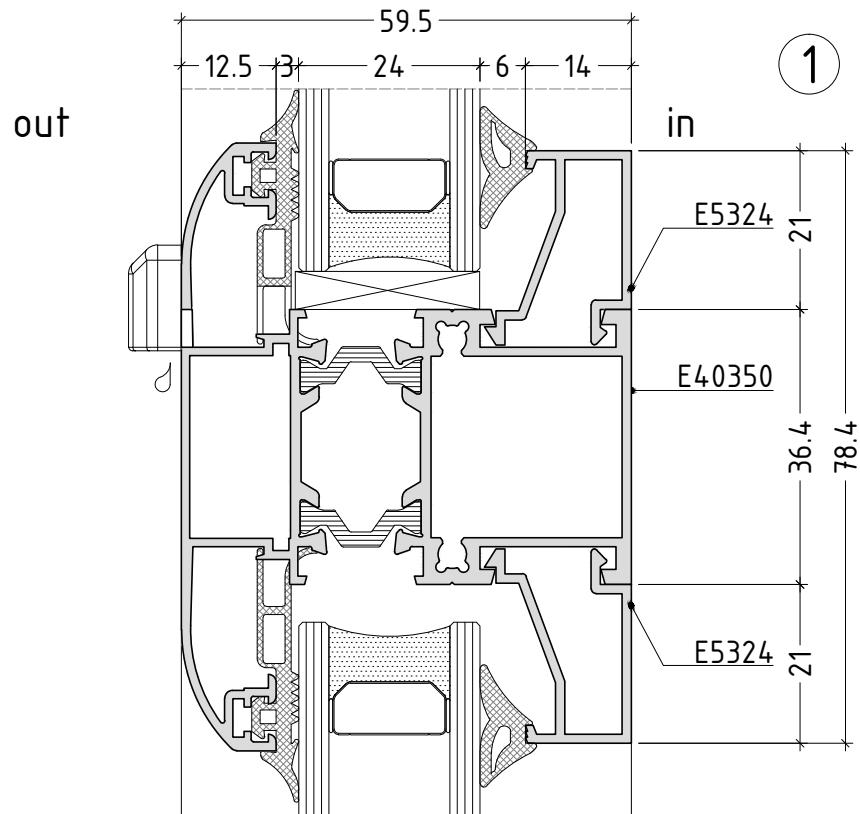


scale : 1:1

D40-06

inward opening

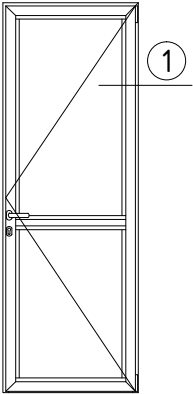


1

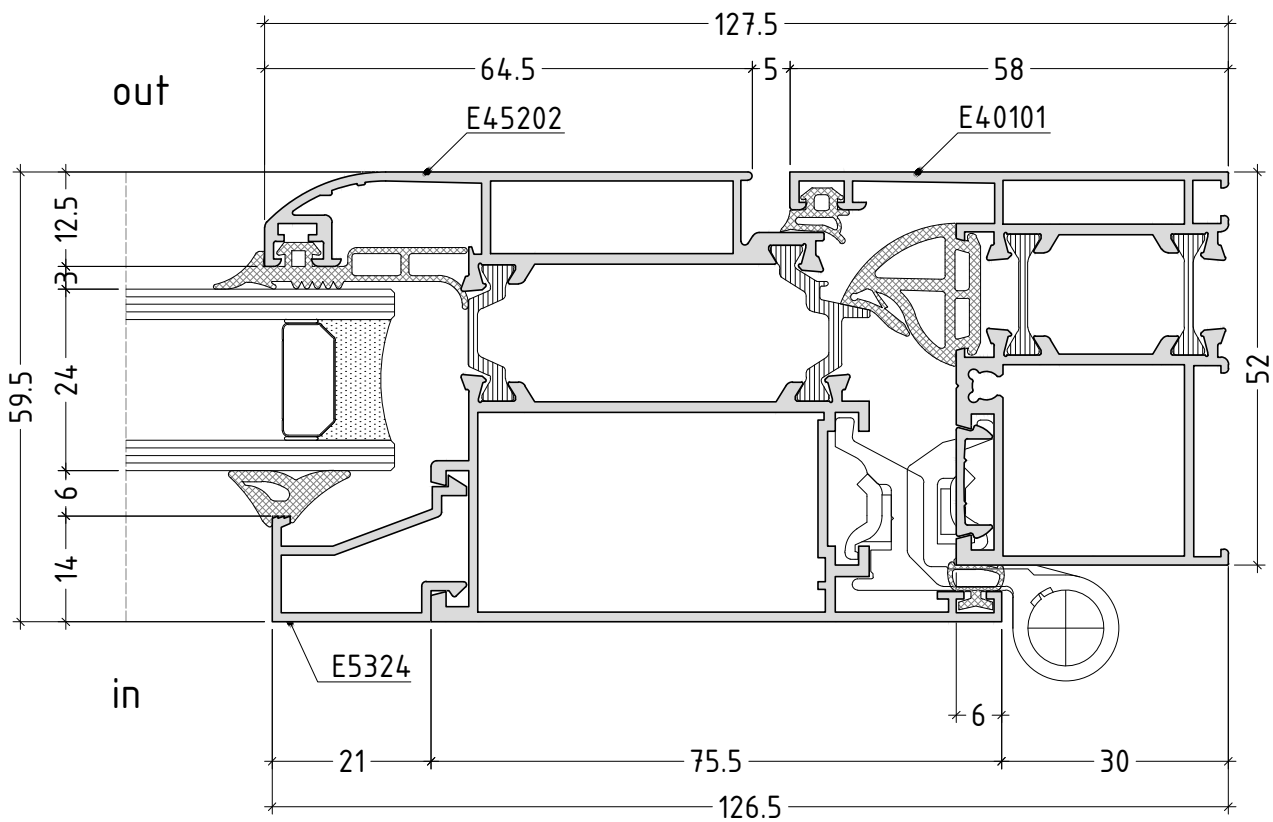


scale : 1:1

inward opening


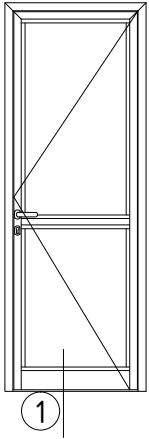


1

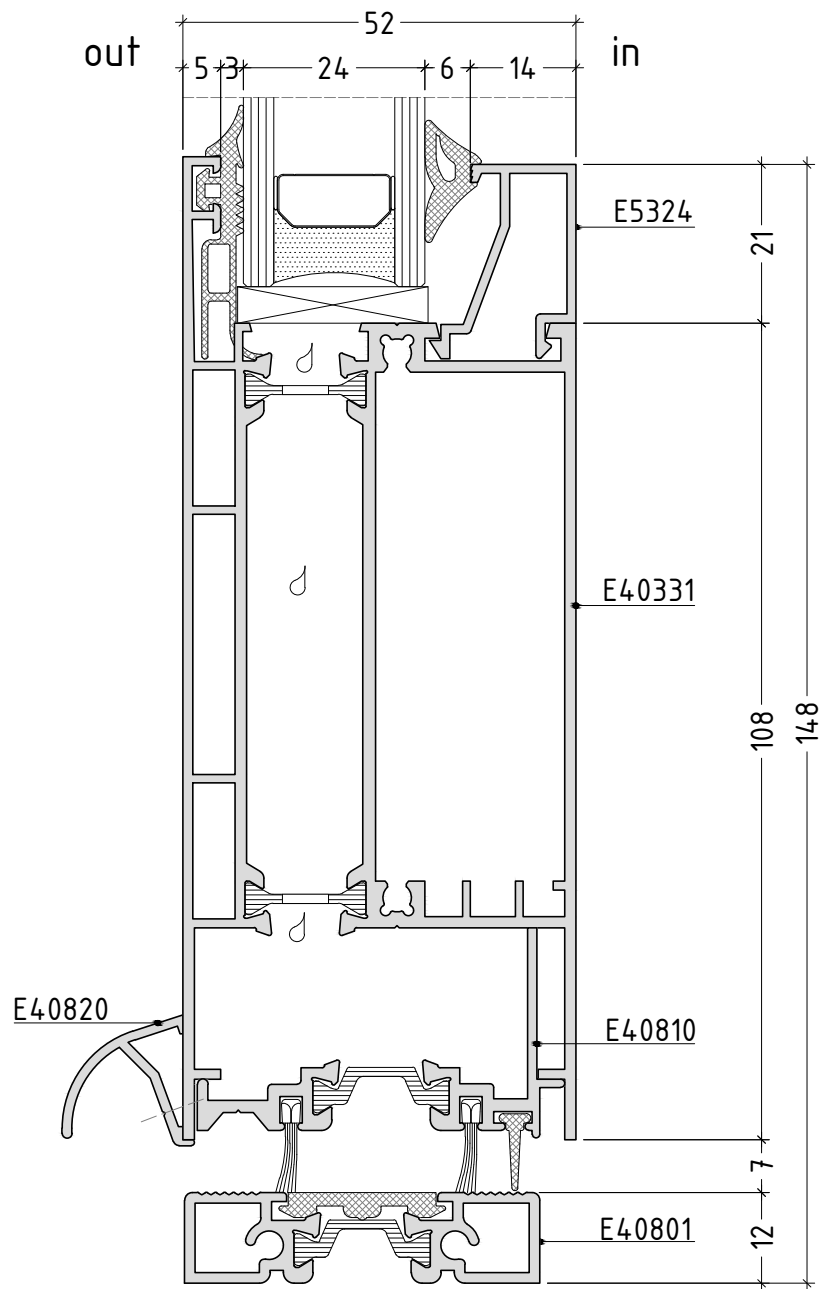

scale : 1:1

outward opening

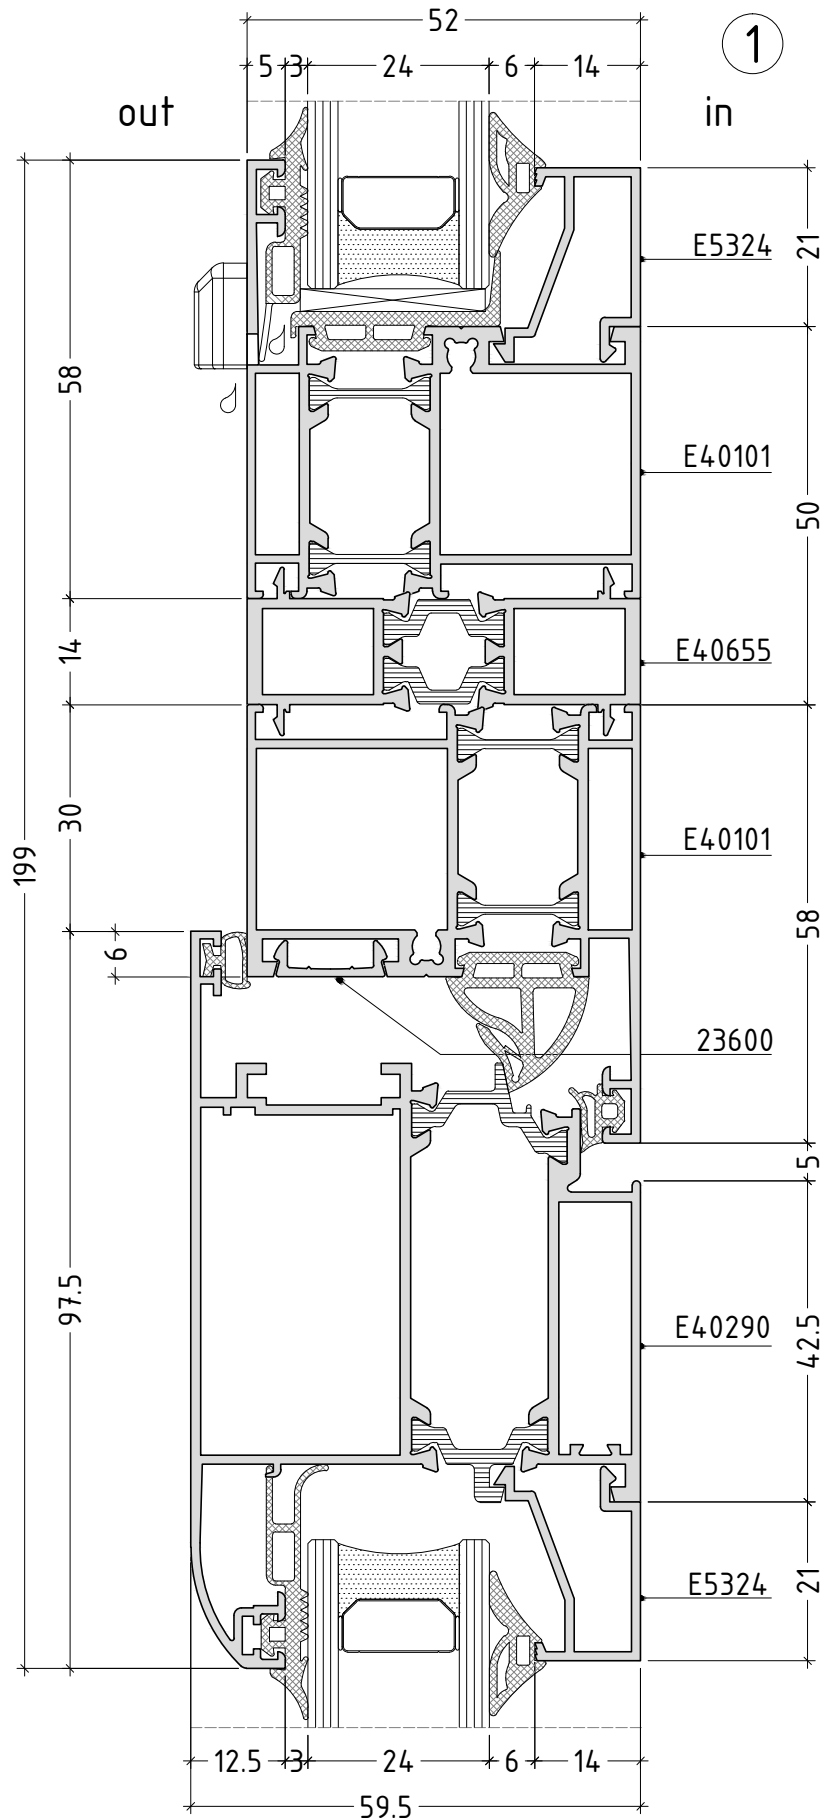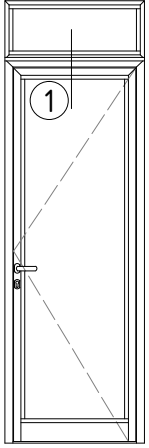


scale : 1:1

D40-09






outward opening

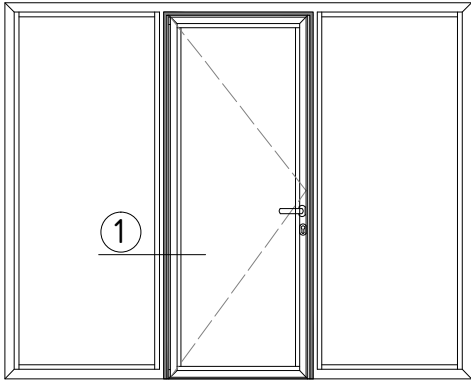


1

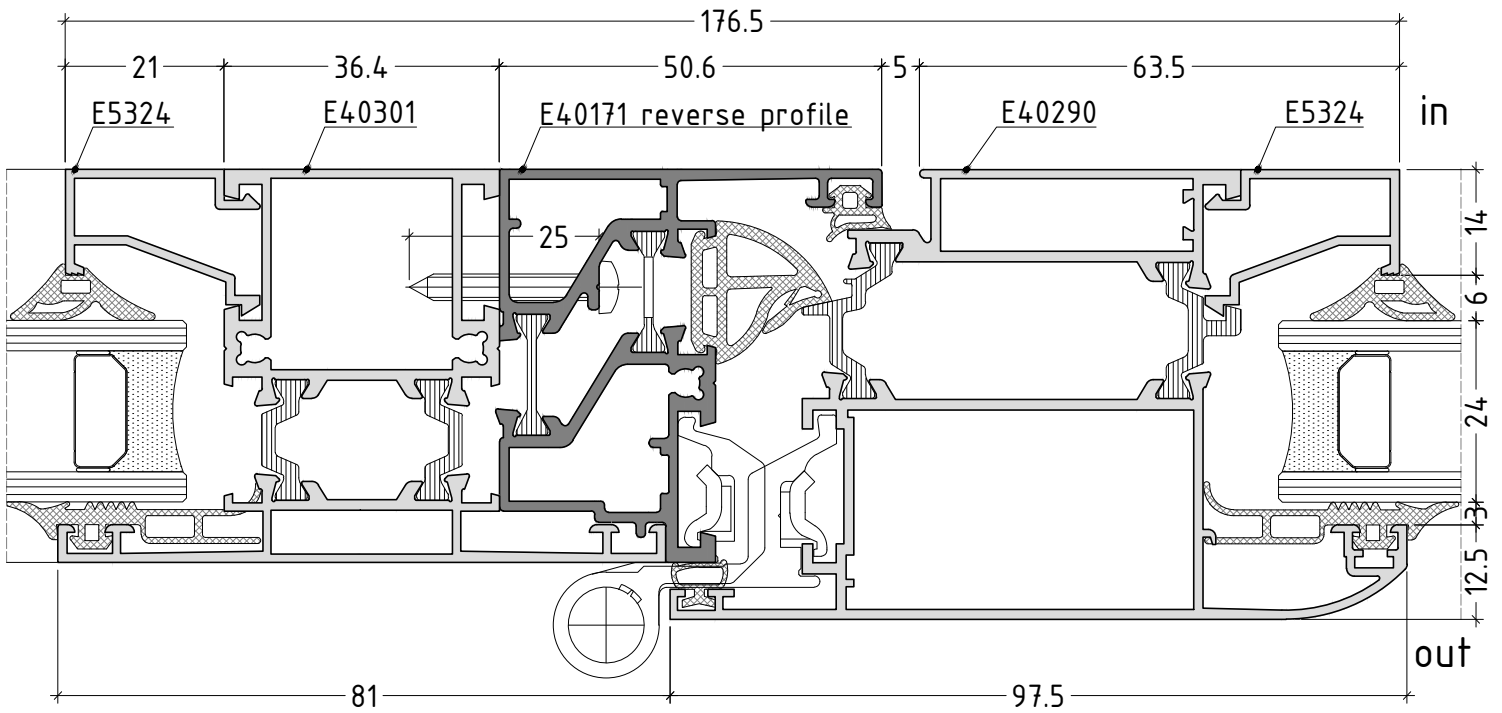


scale : 1:1

outward opening

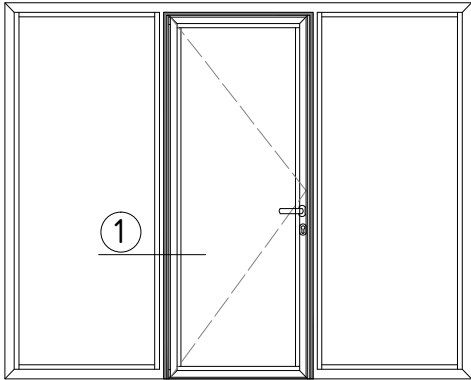

1

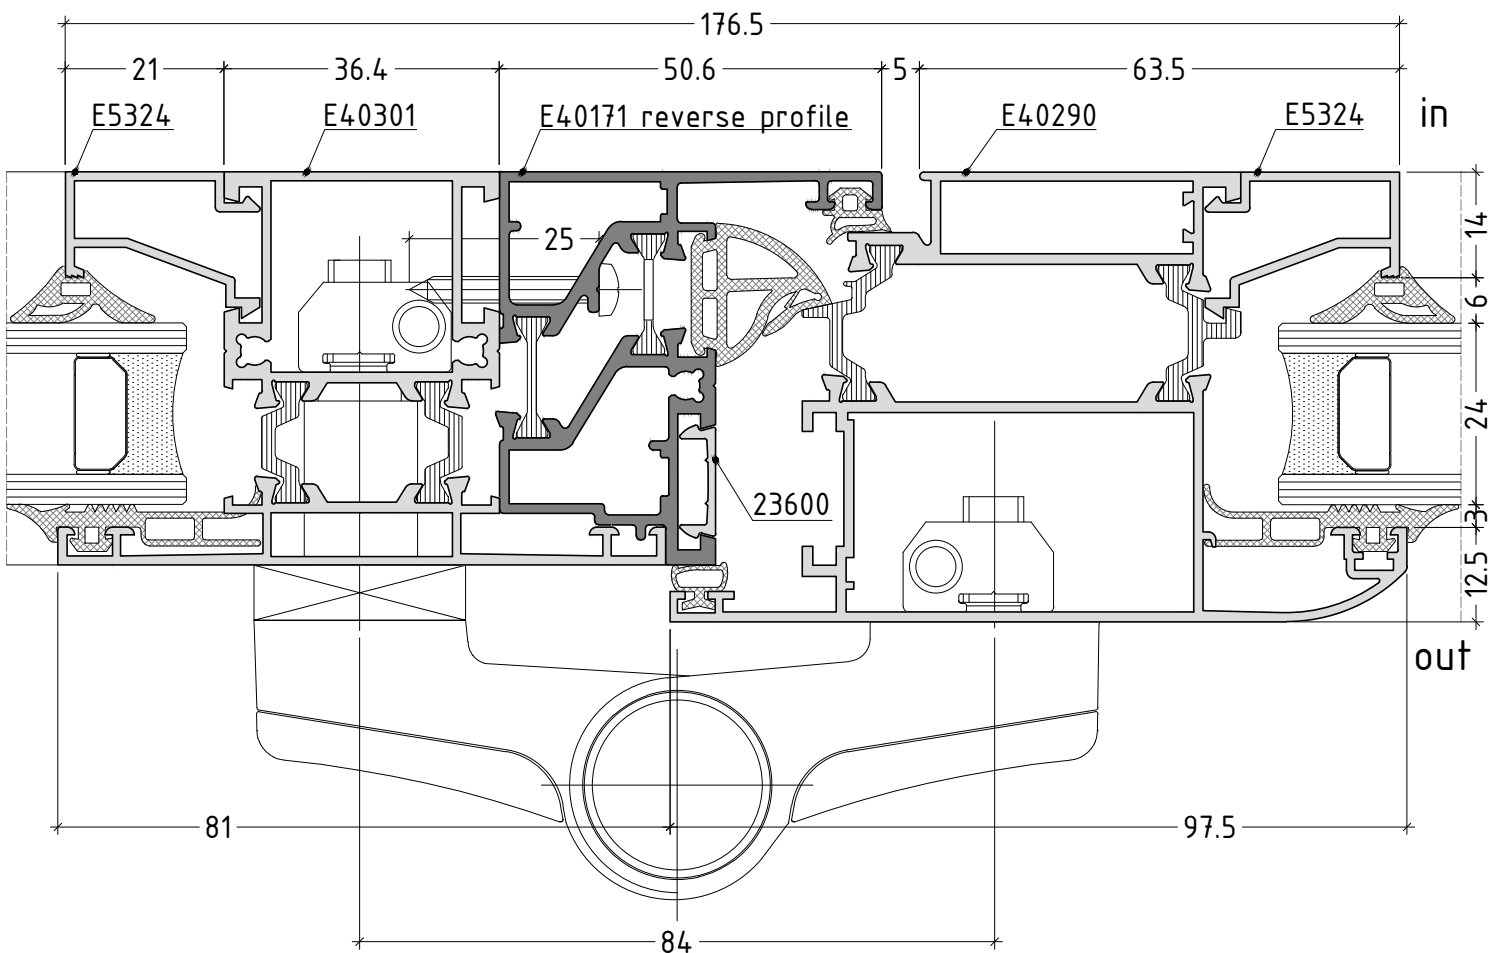


When the hinge and reverse profile are inside the openable part, the distance between axes of hinges has to be 84 mm


scale : 1:1

D40-12

outward opening

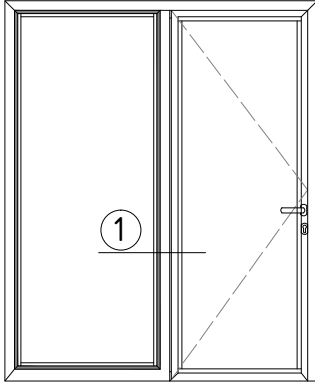

1


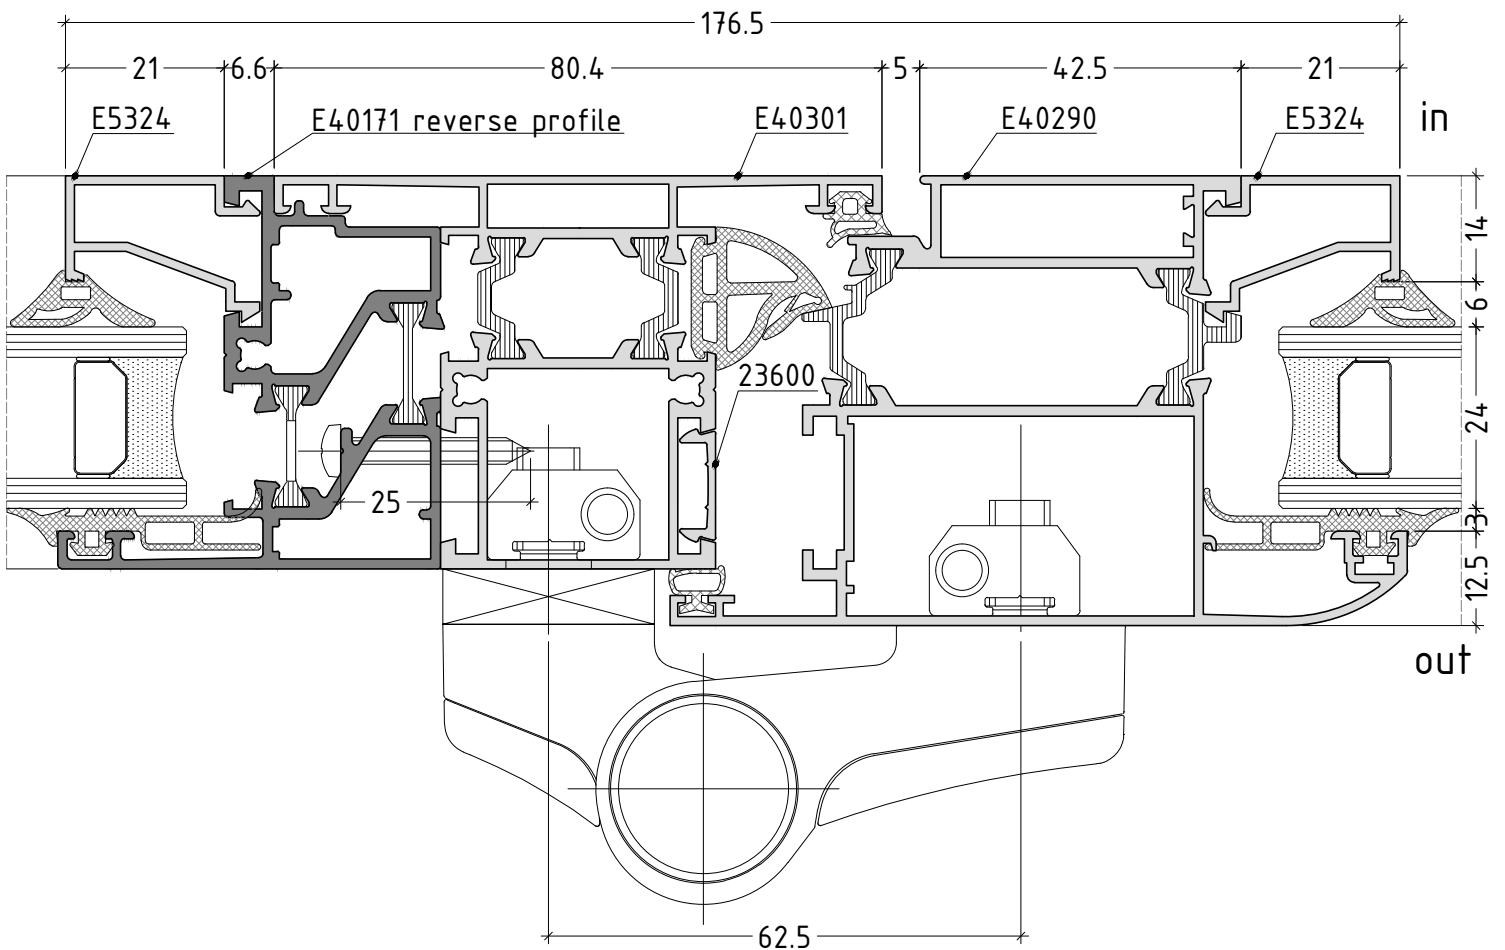


When the hinge and reverse profile are inside the fixed part, the distance between axes of hinges has to be 62,5 mm

scale : 1:1


D40-13

outward opening

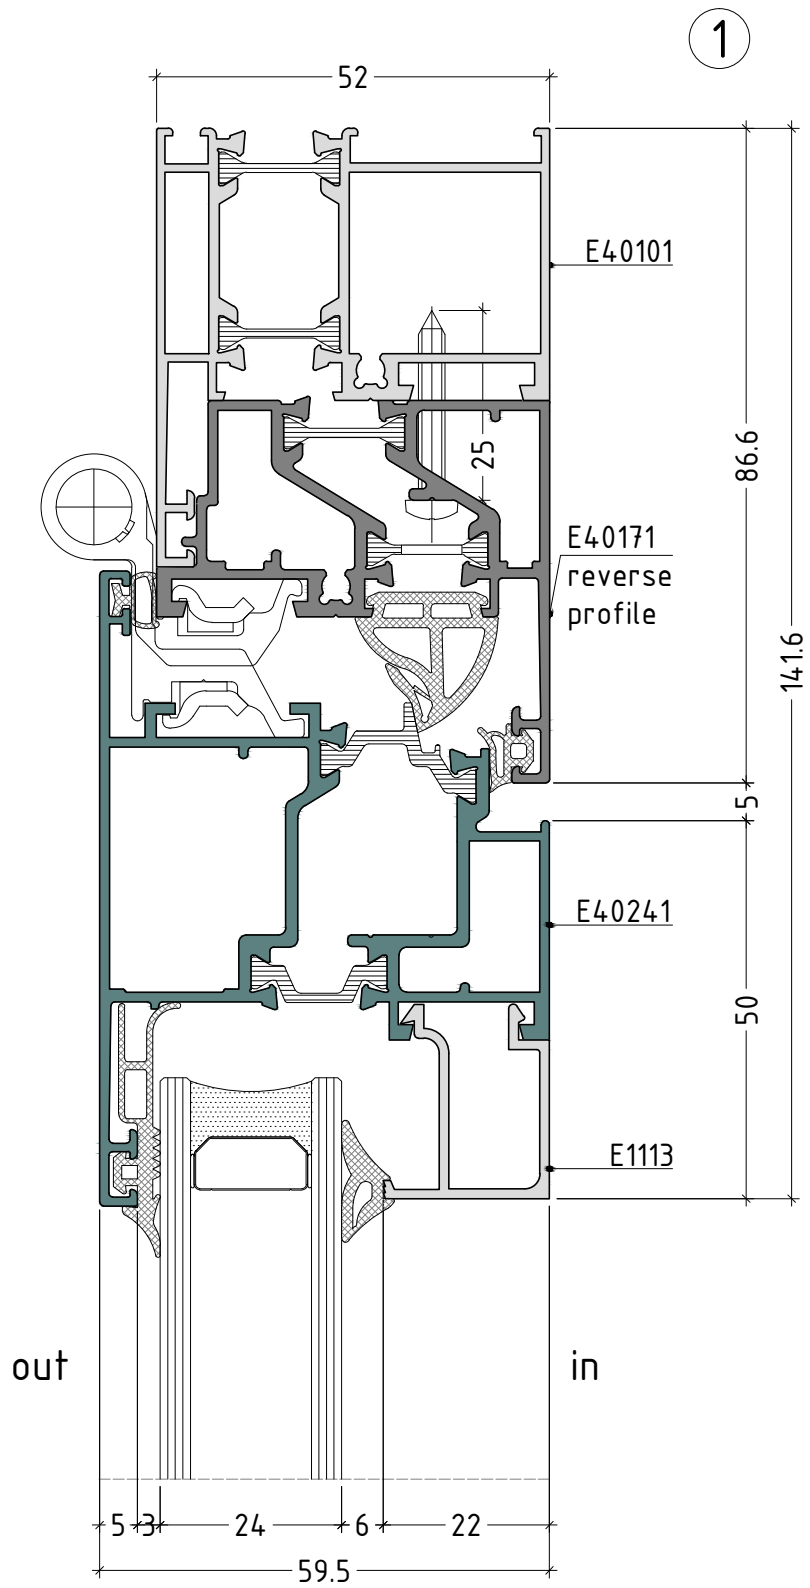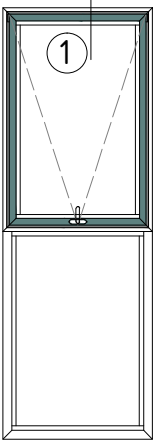


scale : 1:1

outward opening





①

①




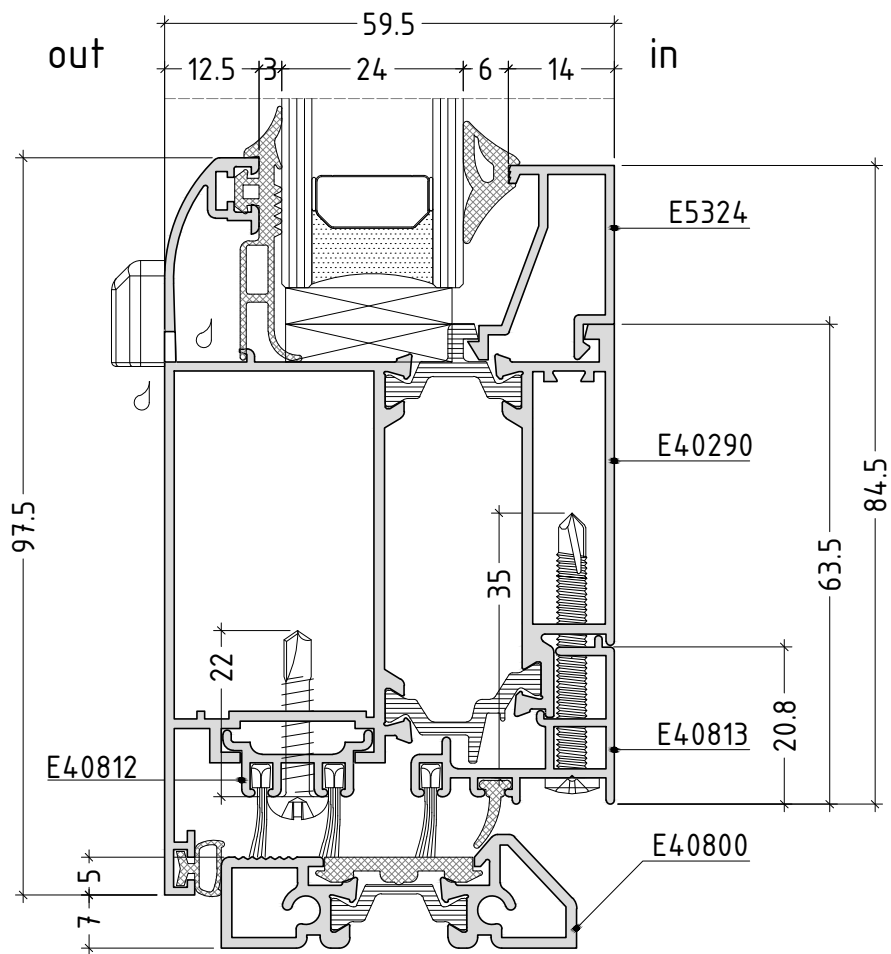


scale : 1:1


outward opening

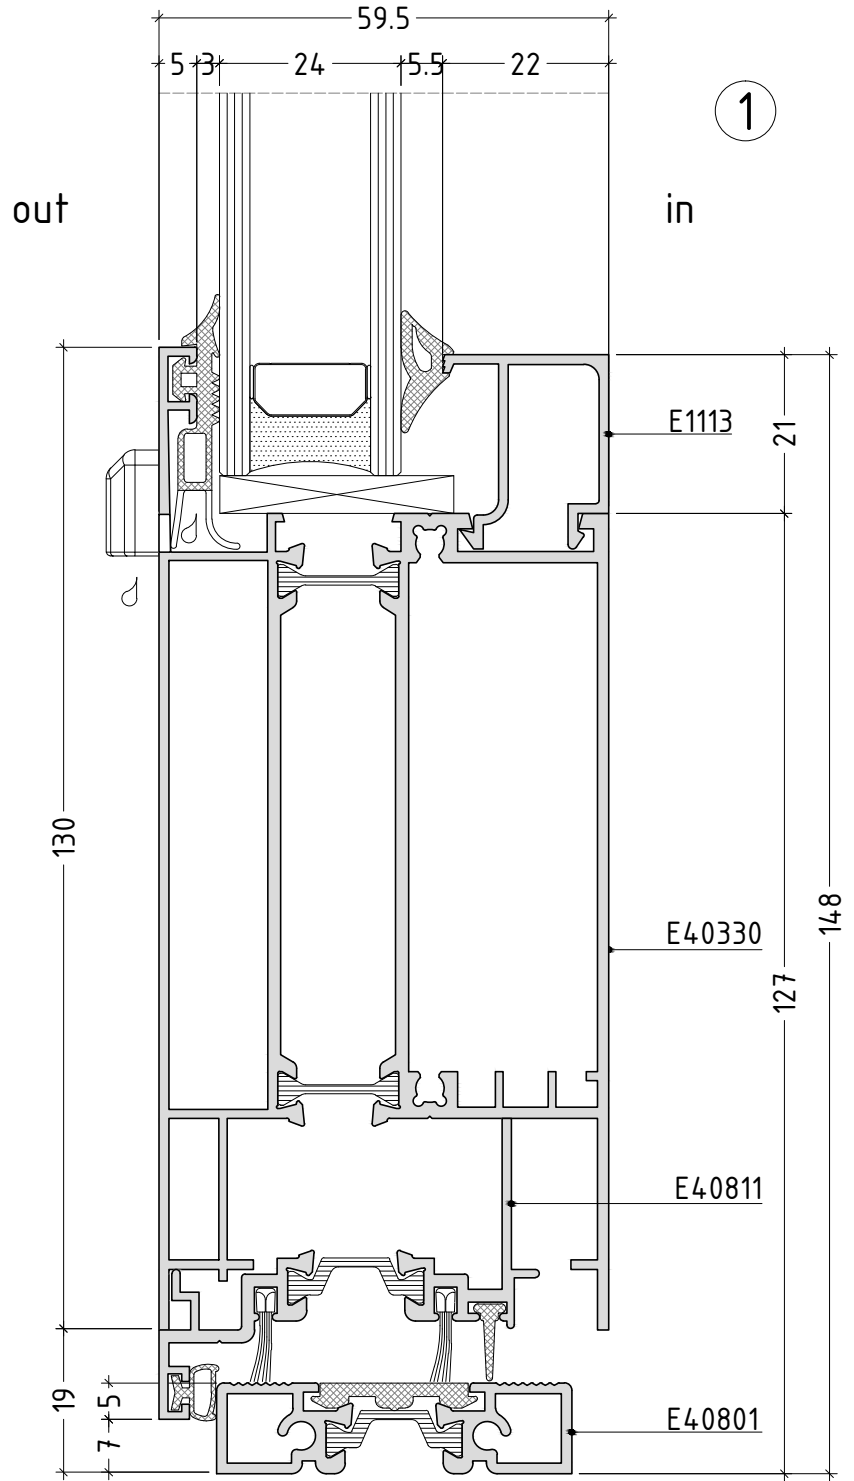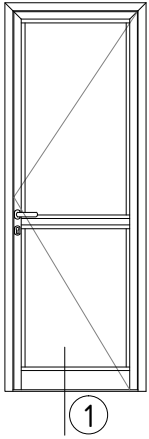


scale : 1:1

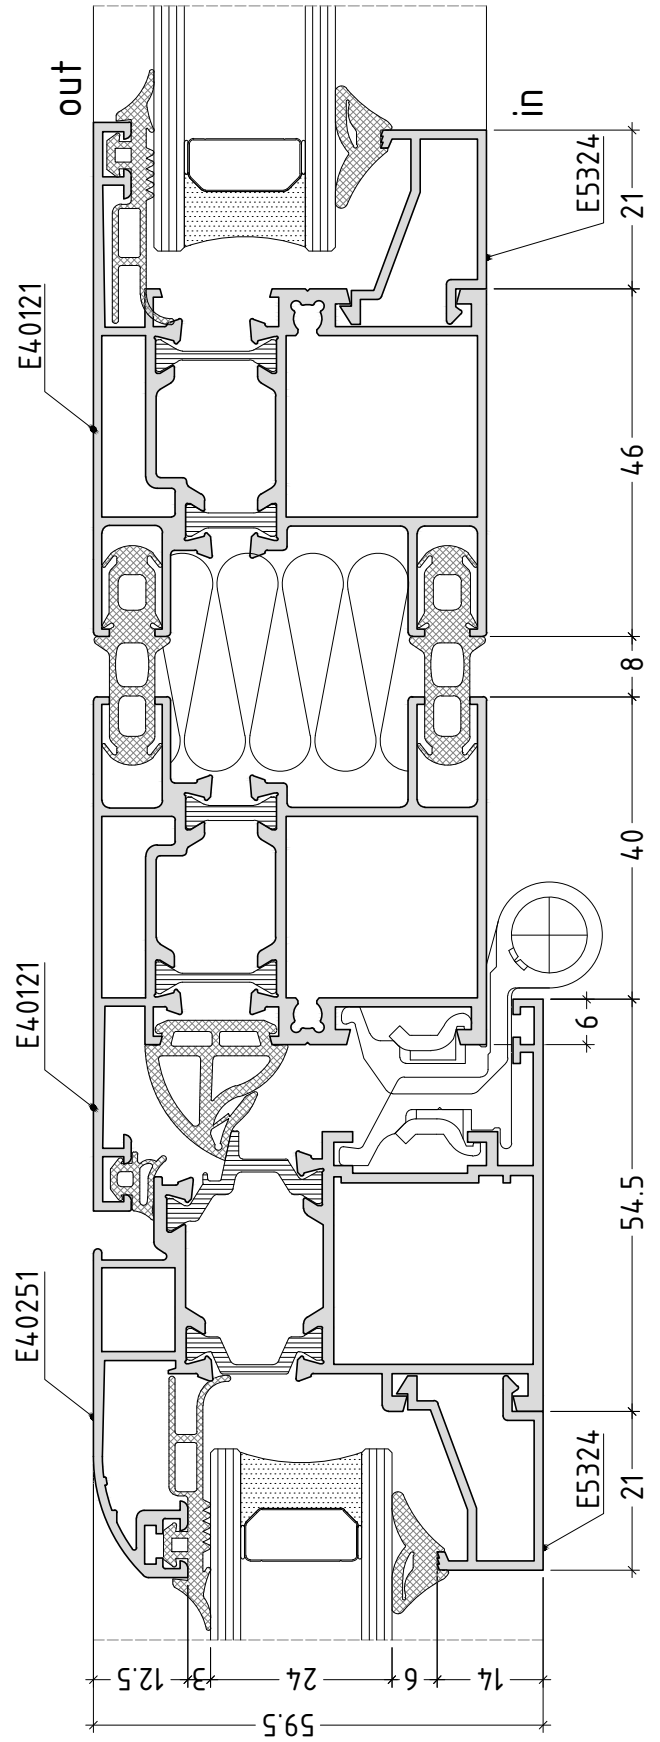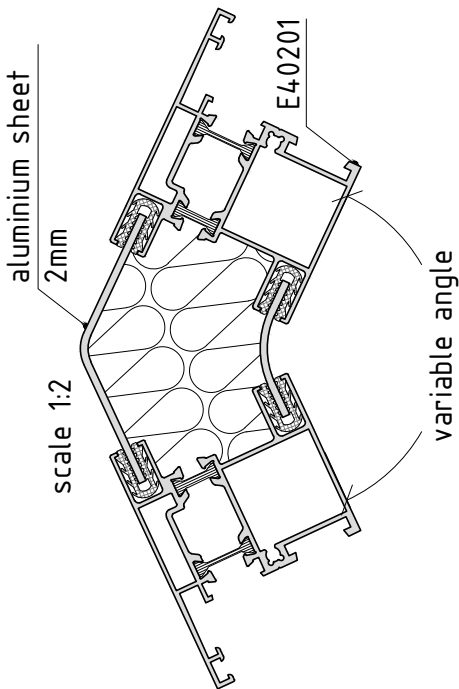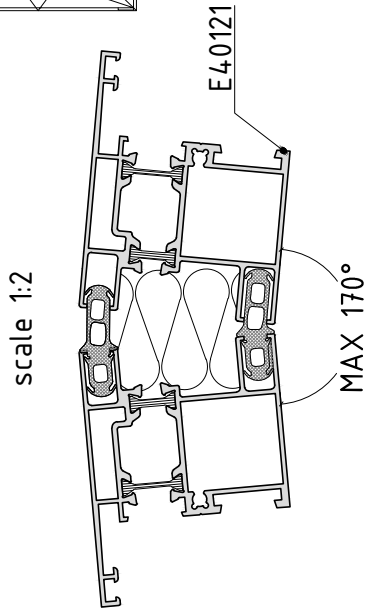

scale : 1:1

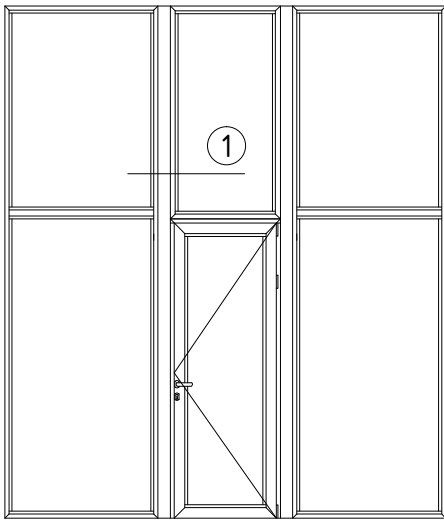


1

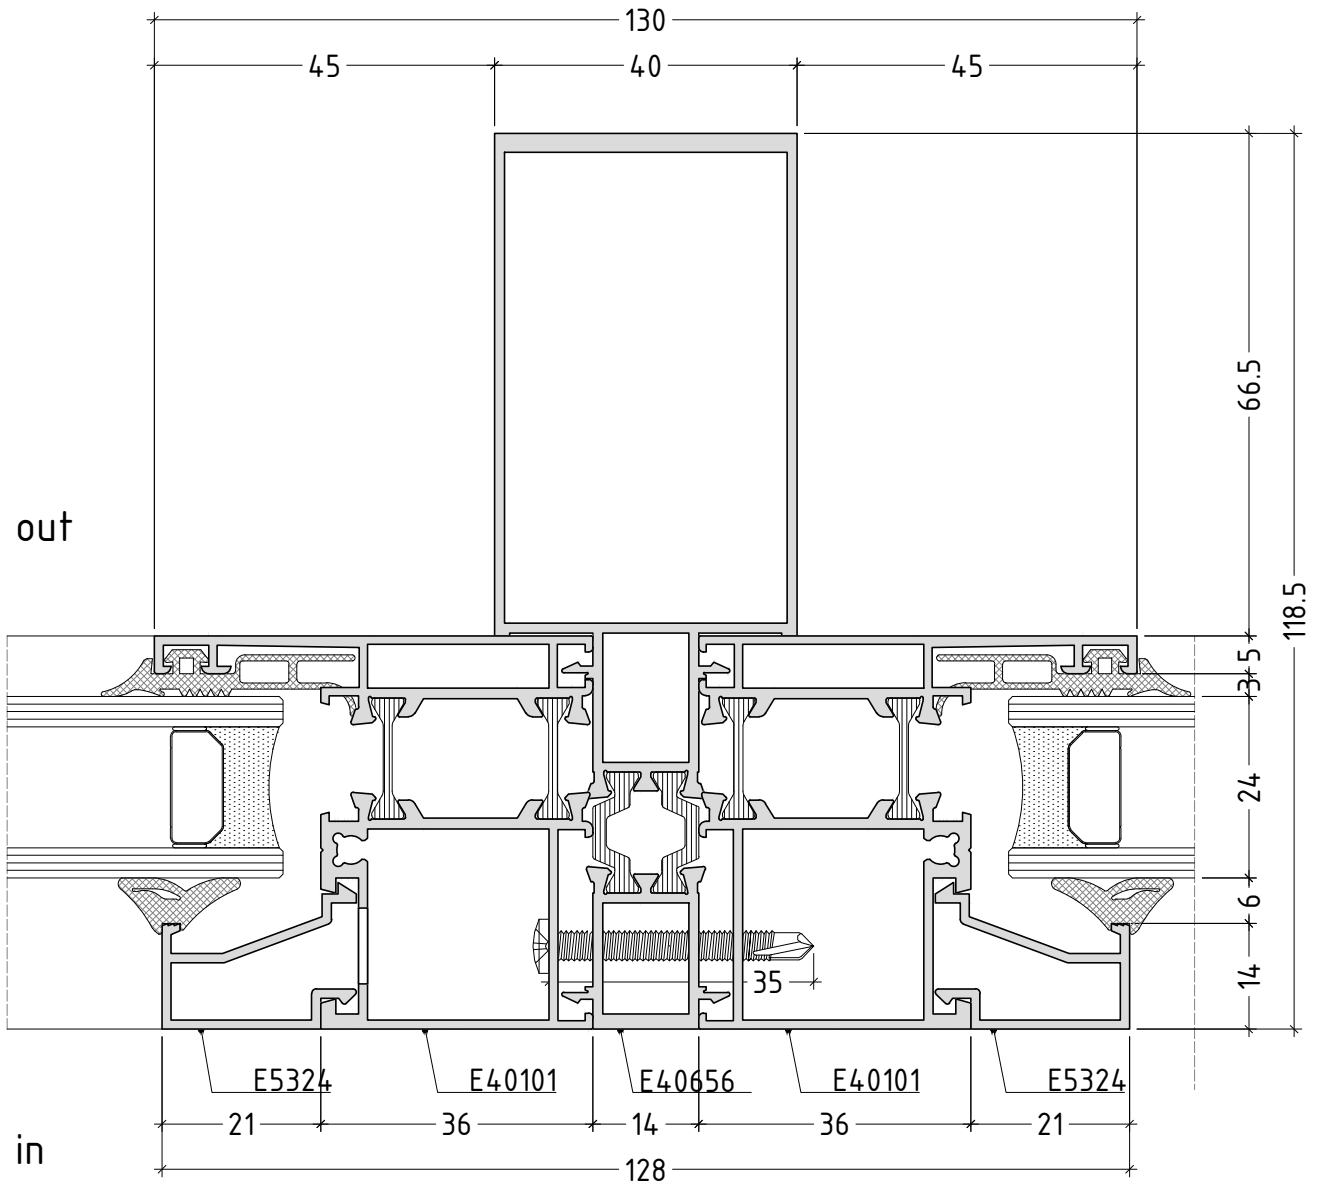

scale : 1:1




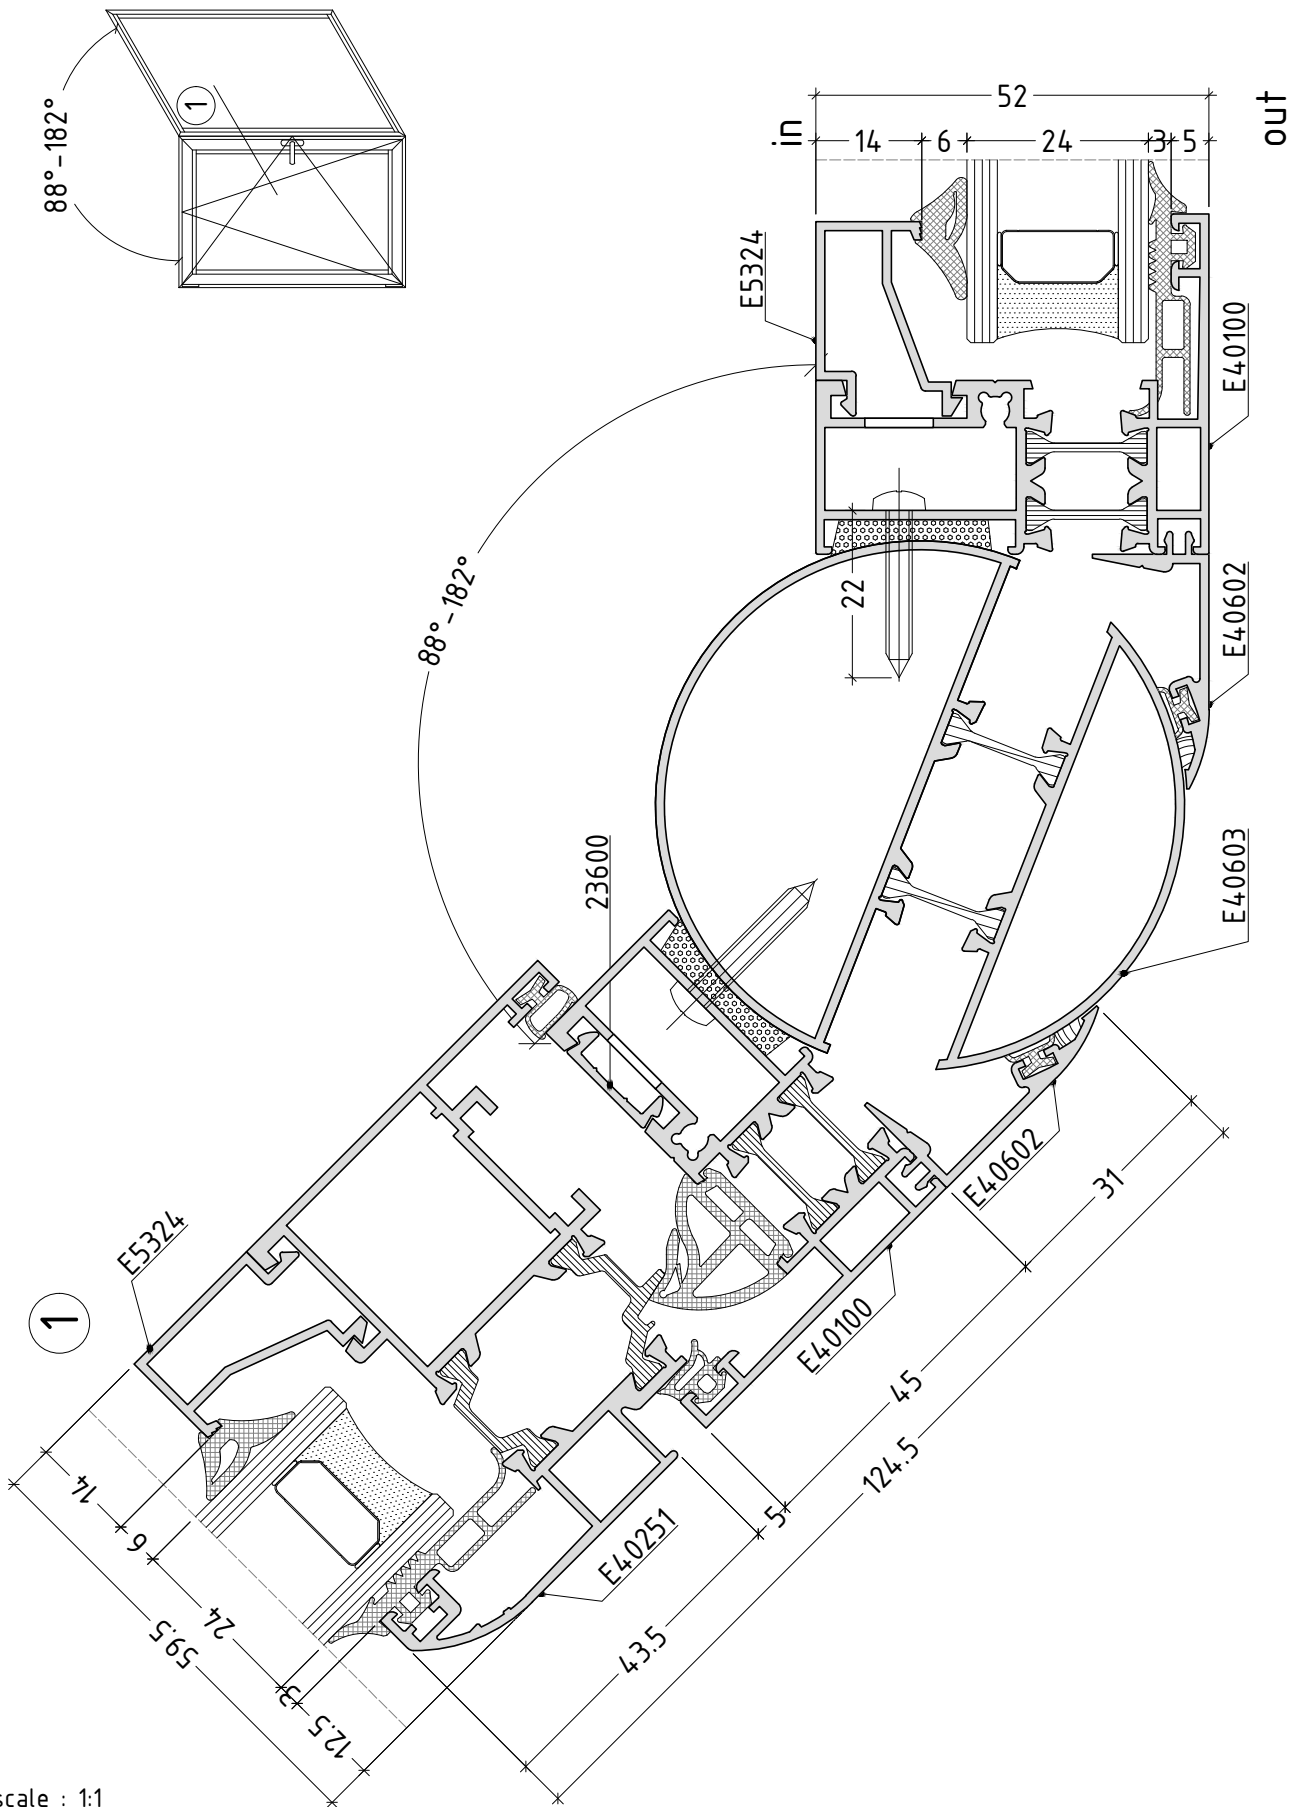

scale : 1:1







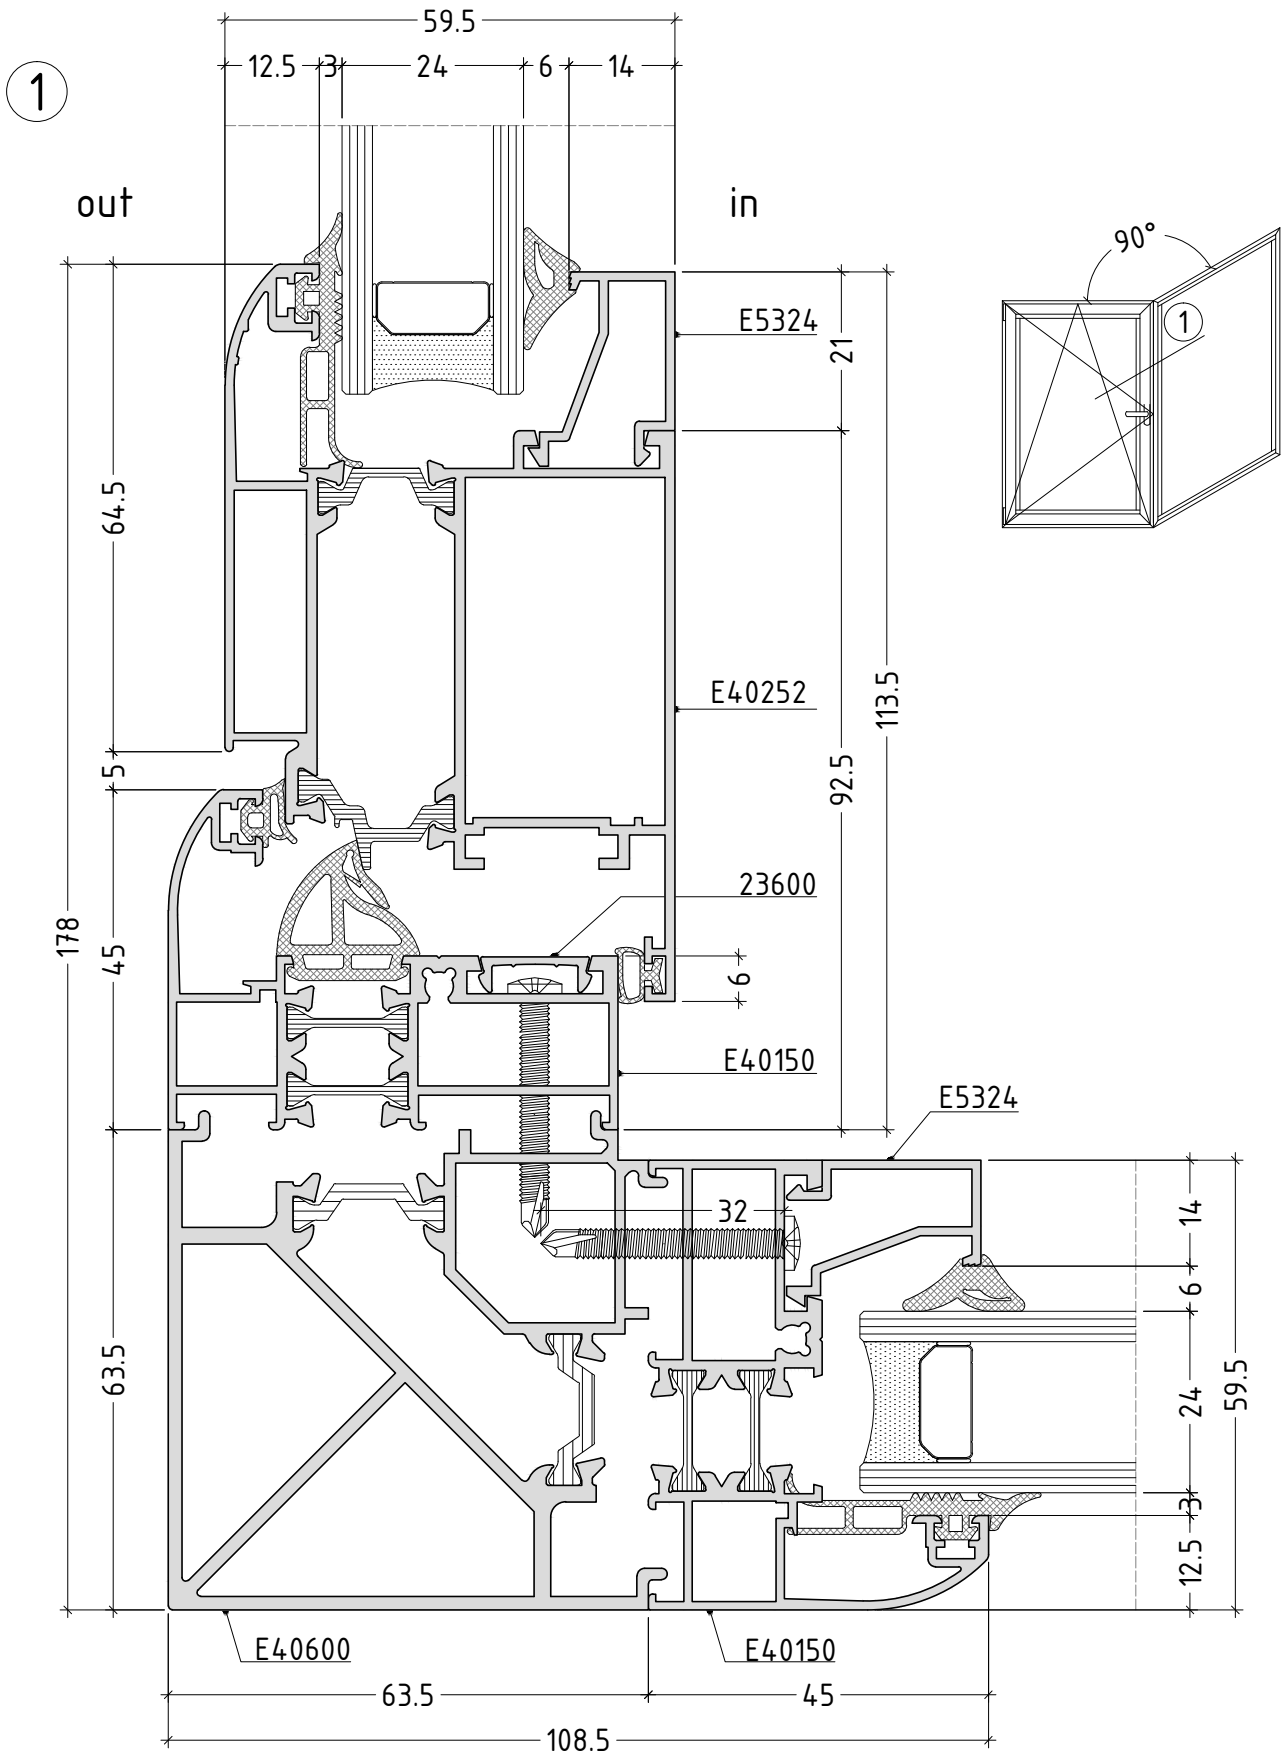

scale : 1:1



D40-22

inward opening  
PVC groove

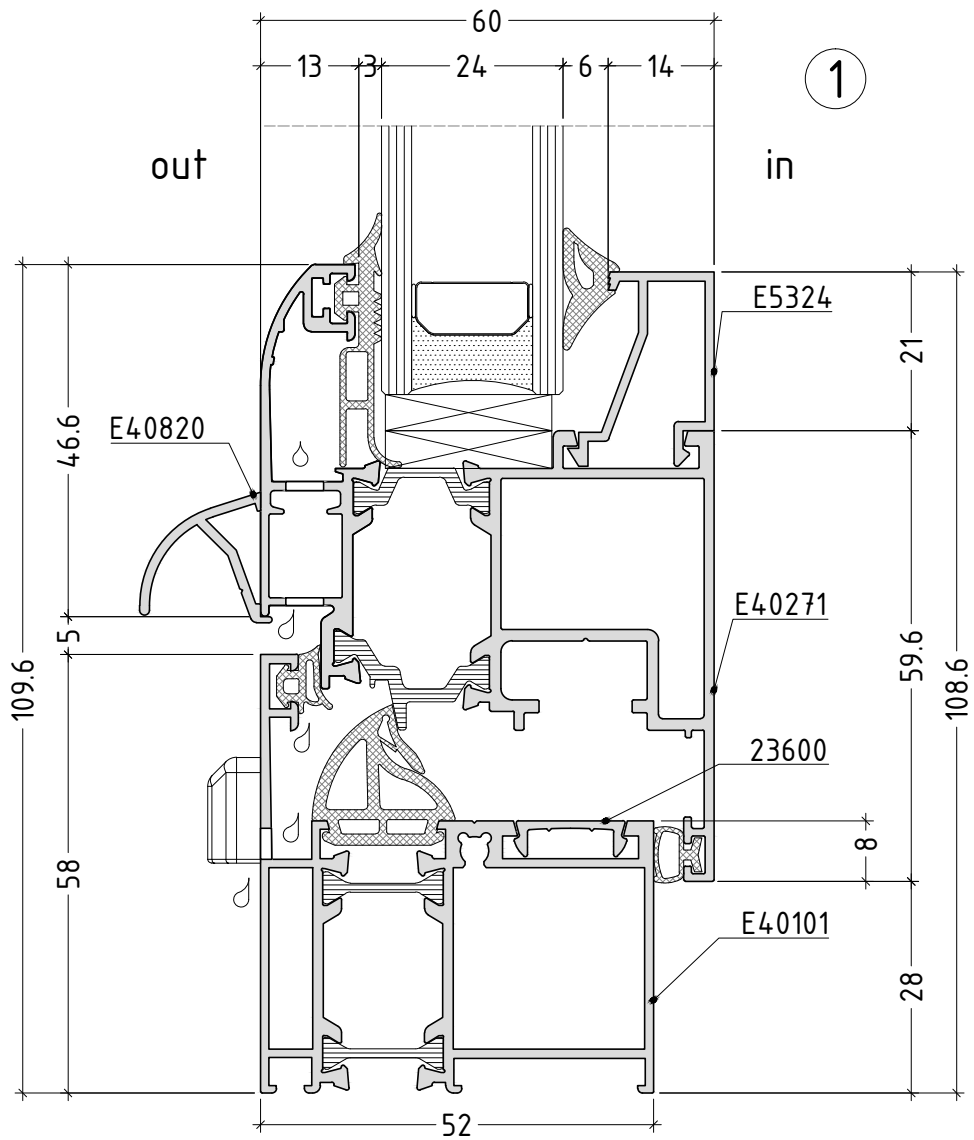



scale : 1:1

inward opening  
PVC groove

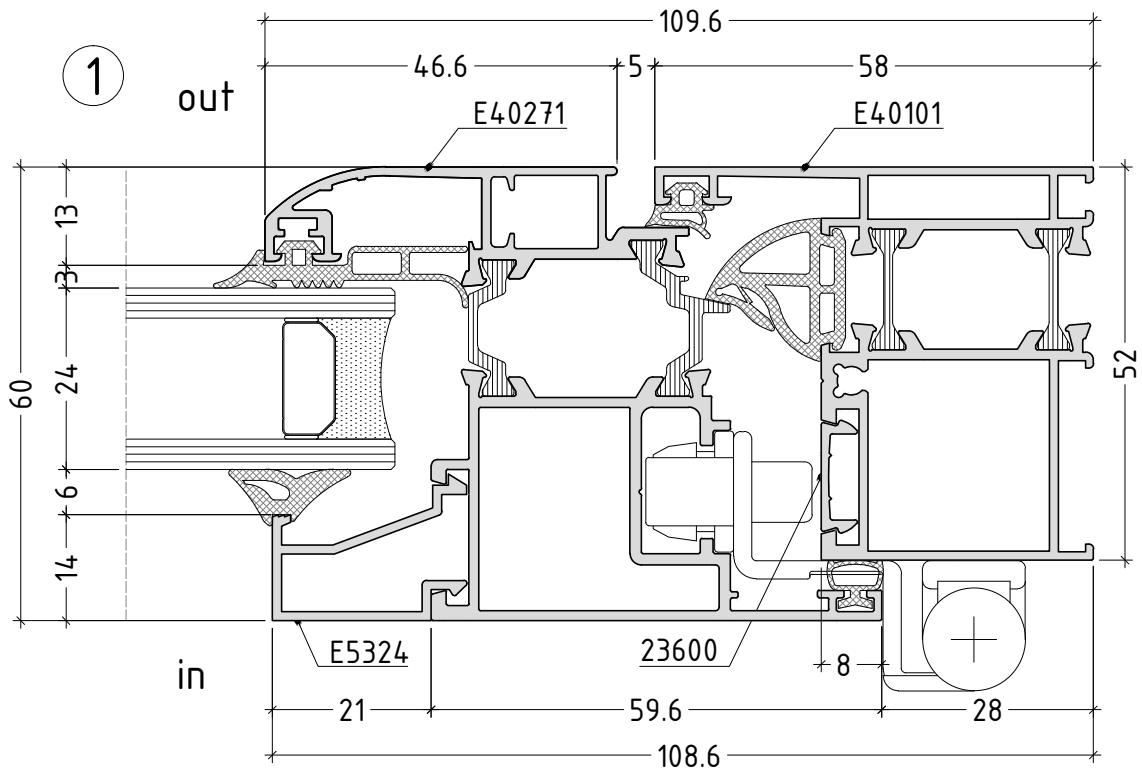



scale : 1:1

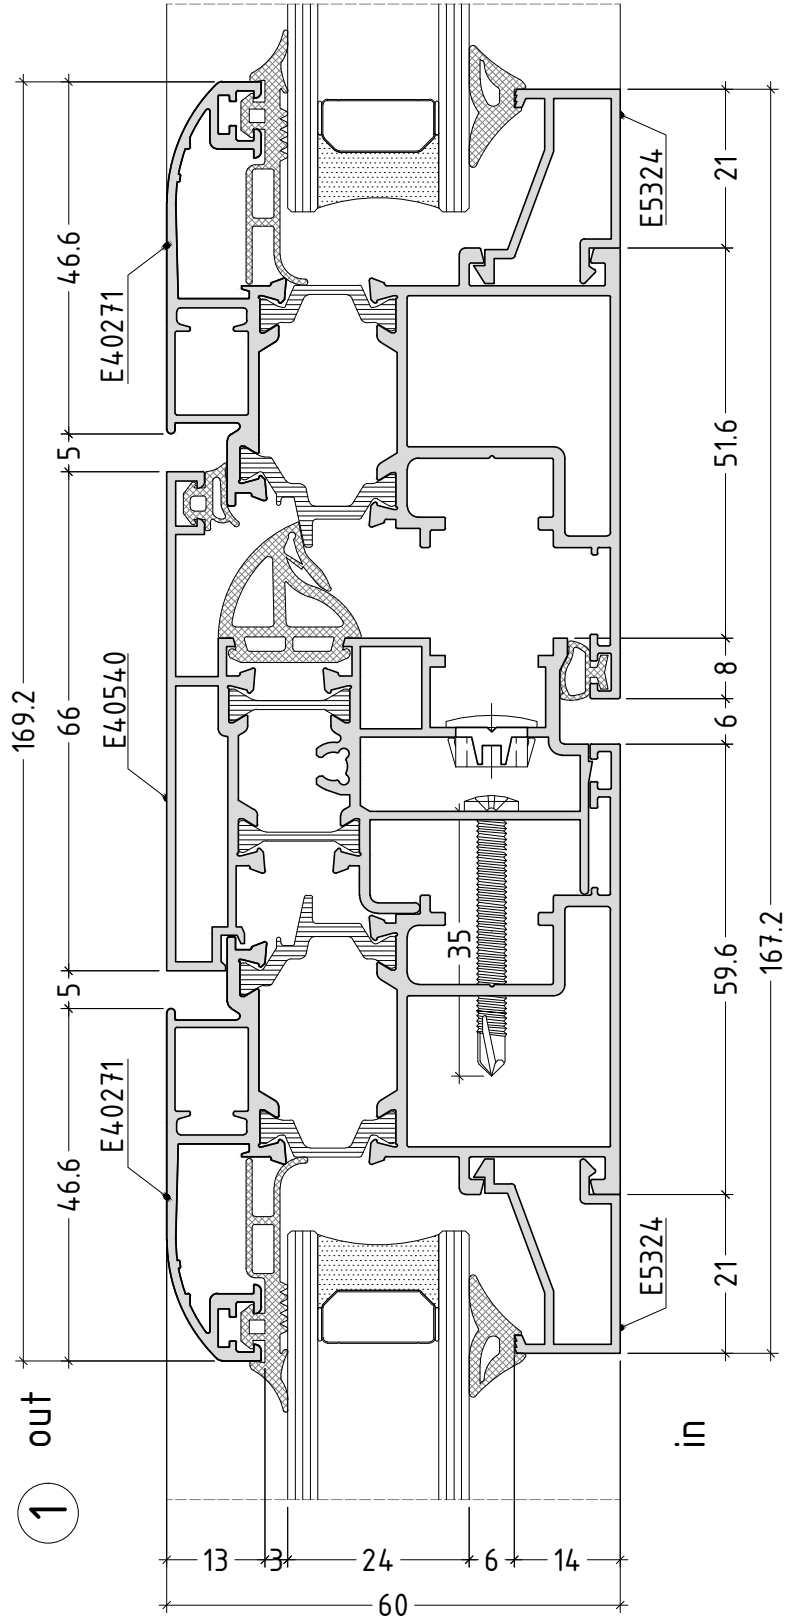

scale : 1:1

inward opening  
PVC groove

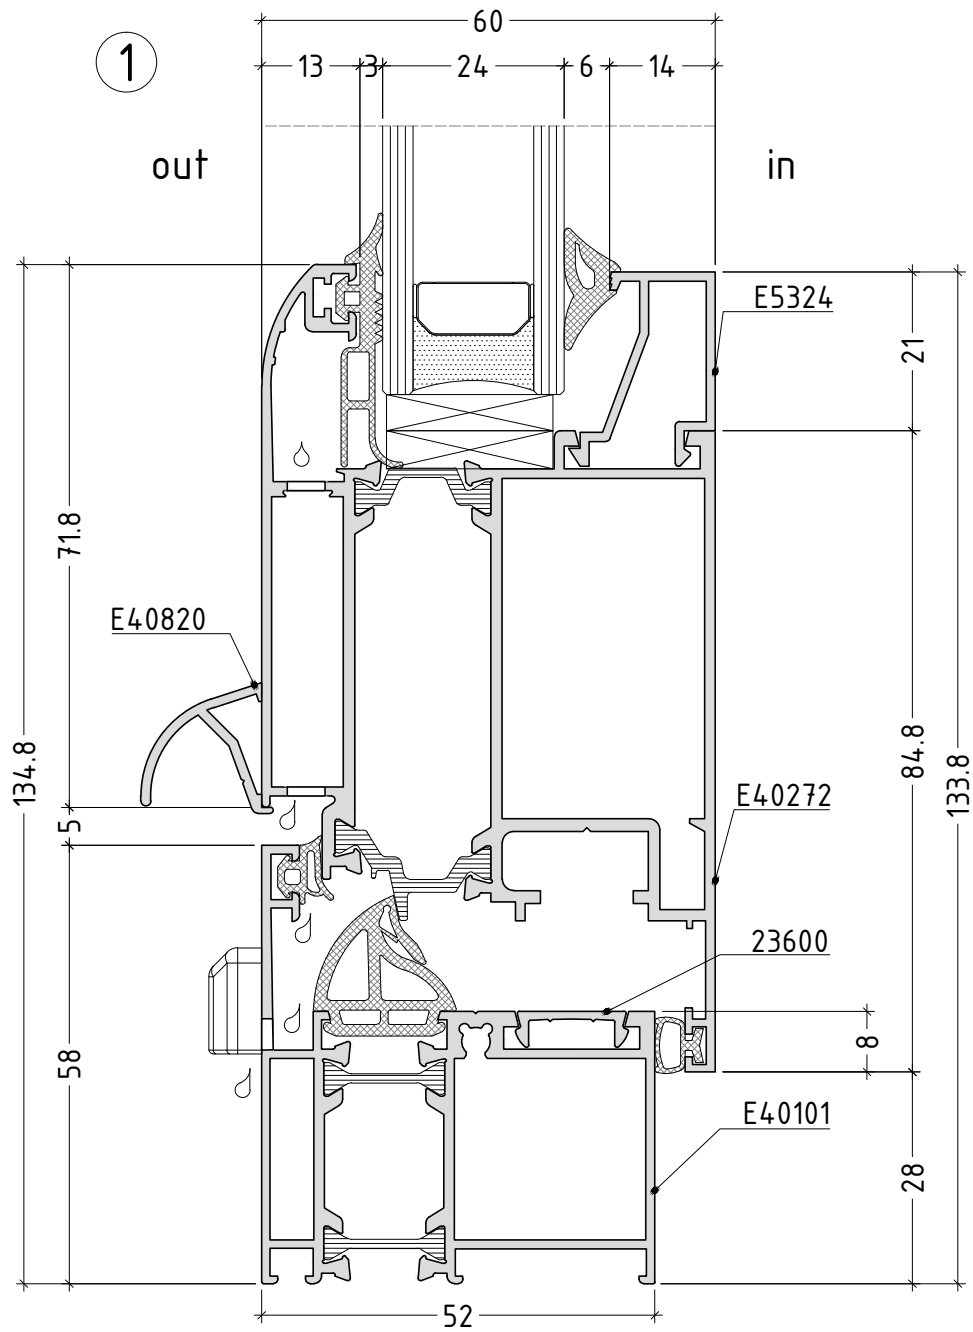



scale : 1:1

D40-26







Pivot mechanism

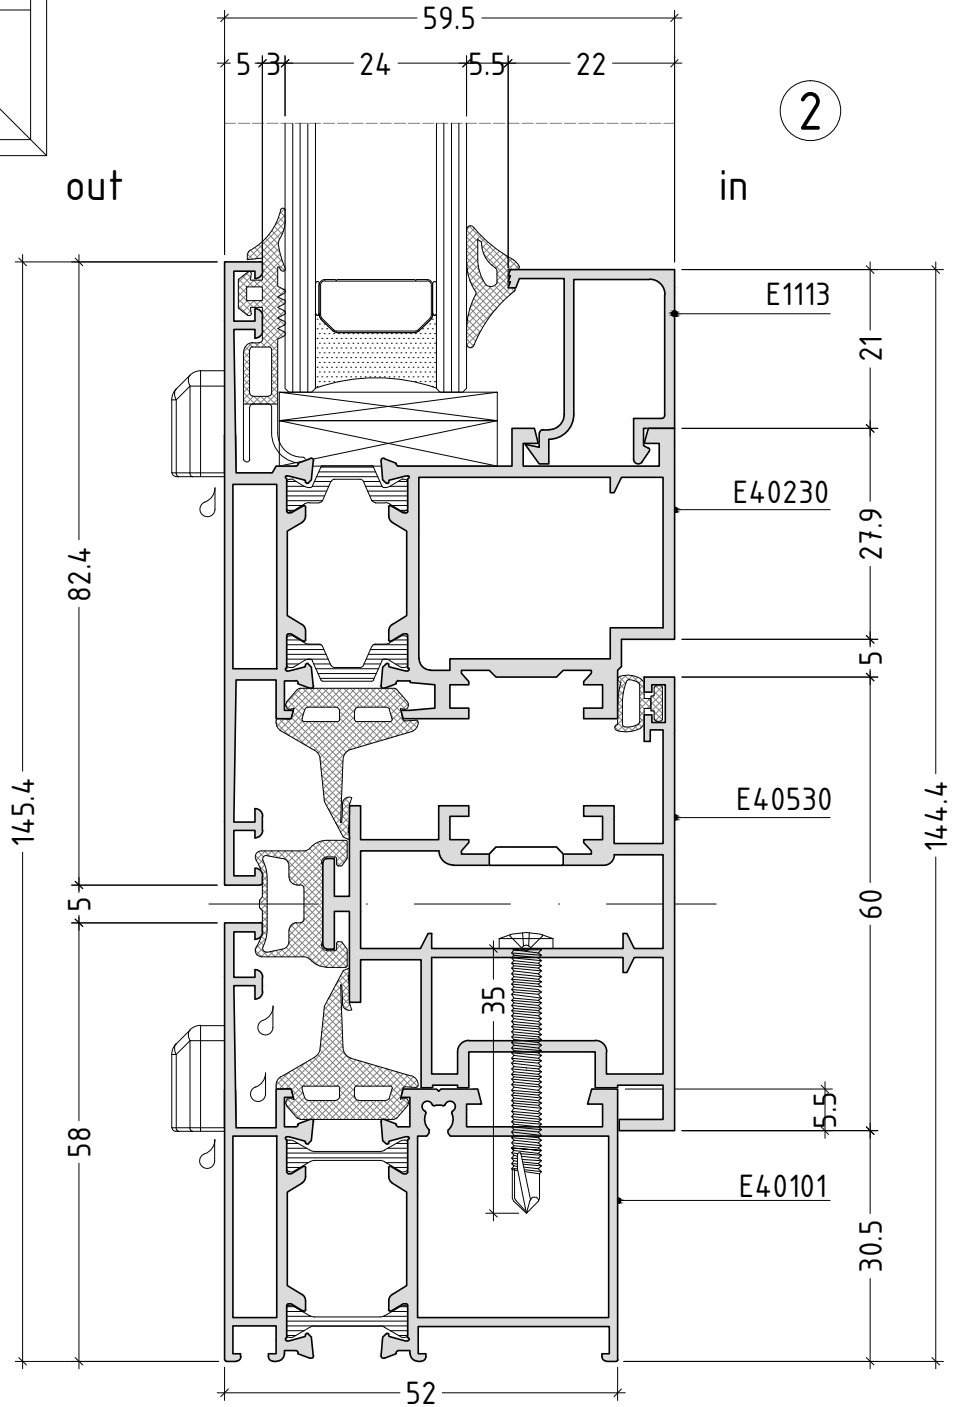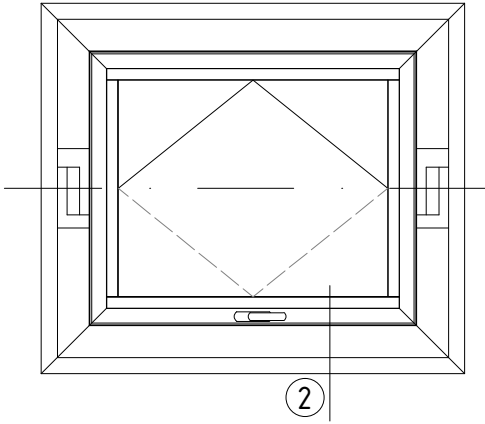

scale : 1:1



D40-28

Pivot mechanism

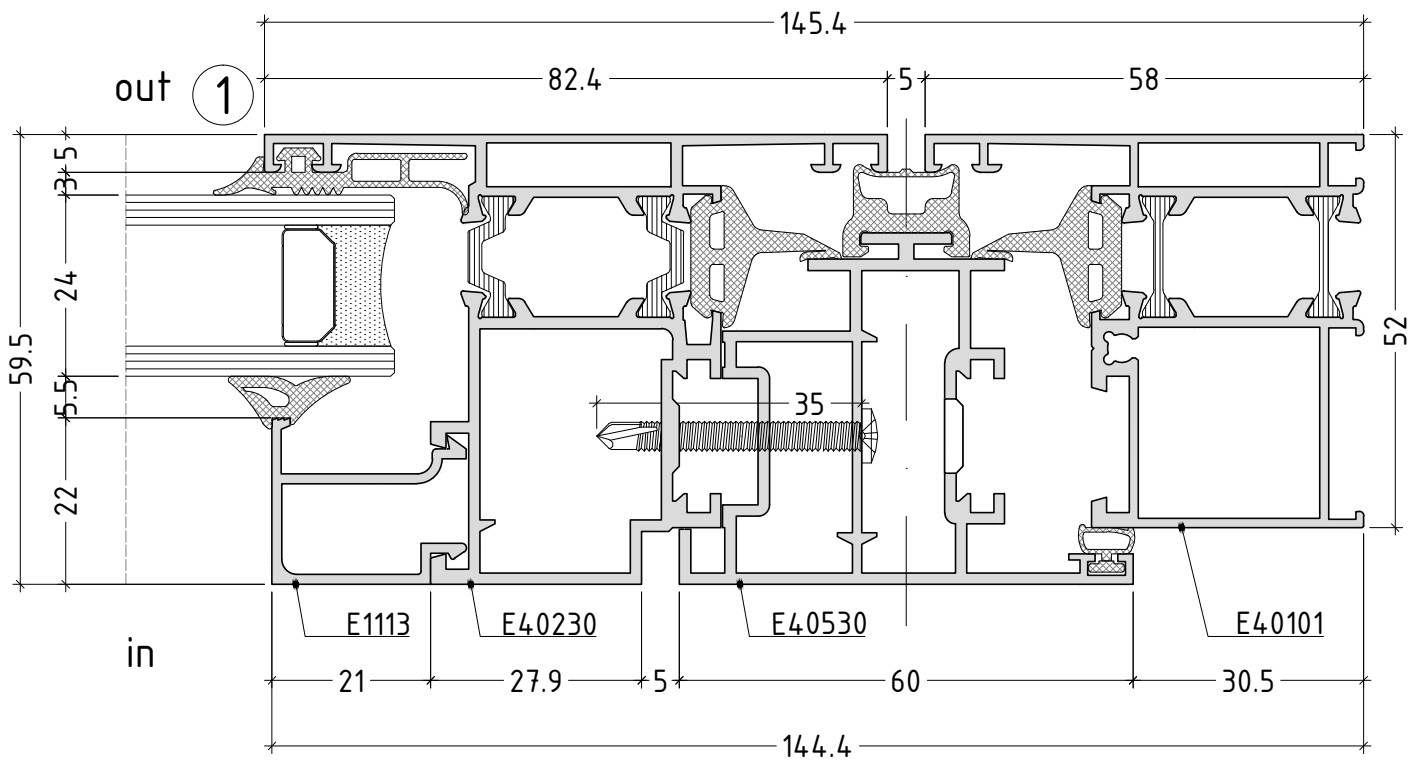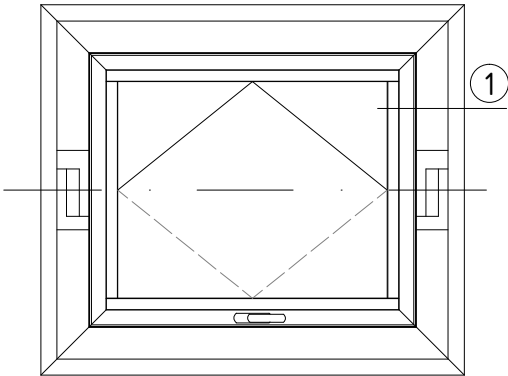


scale : 1:1

Pivot mechanism

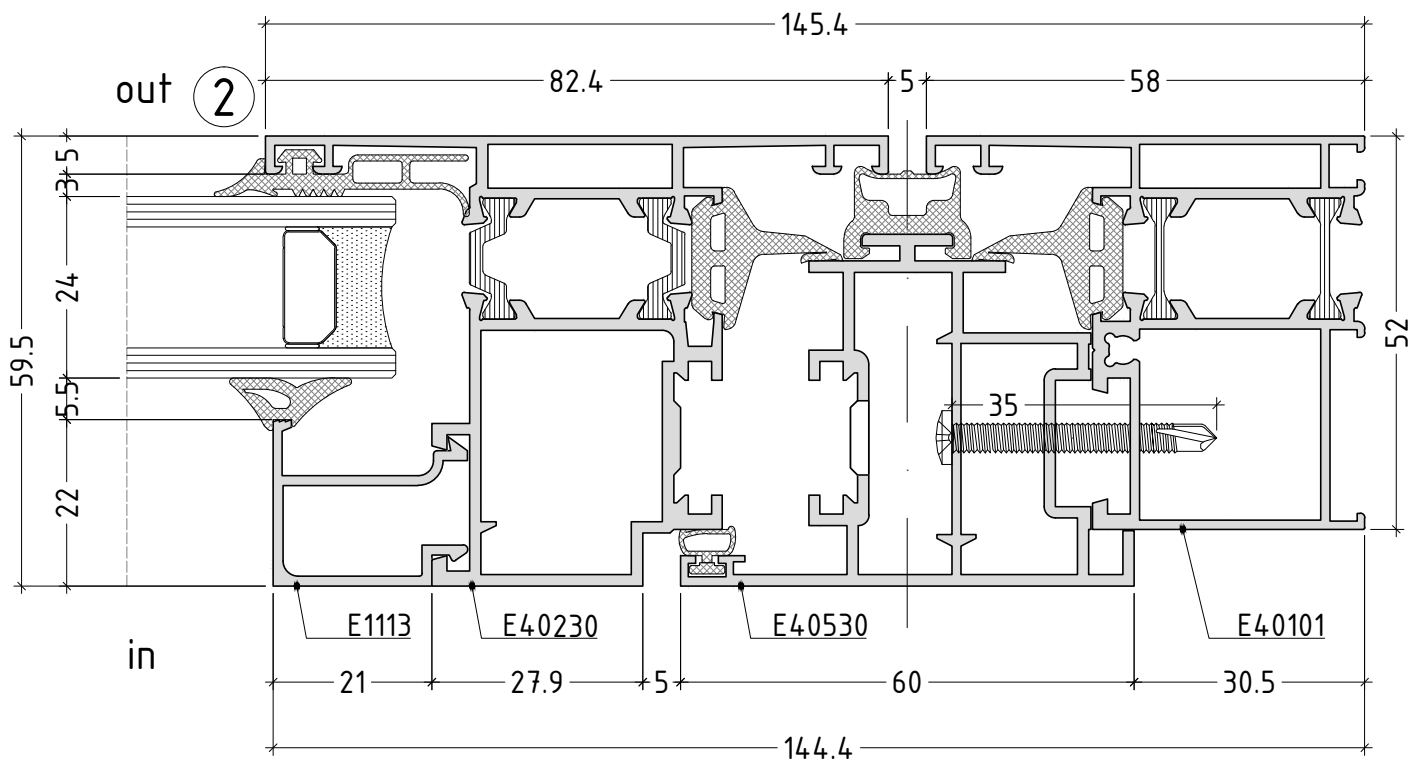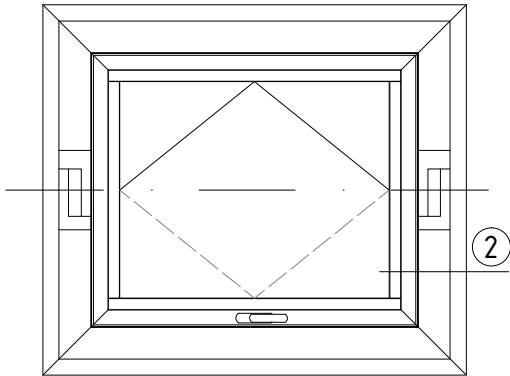


scale : 1:1

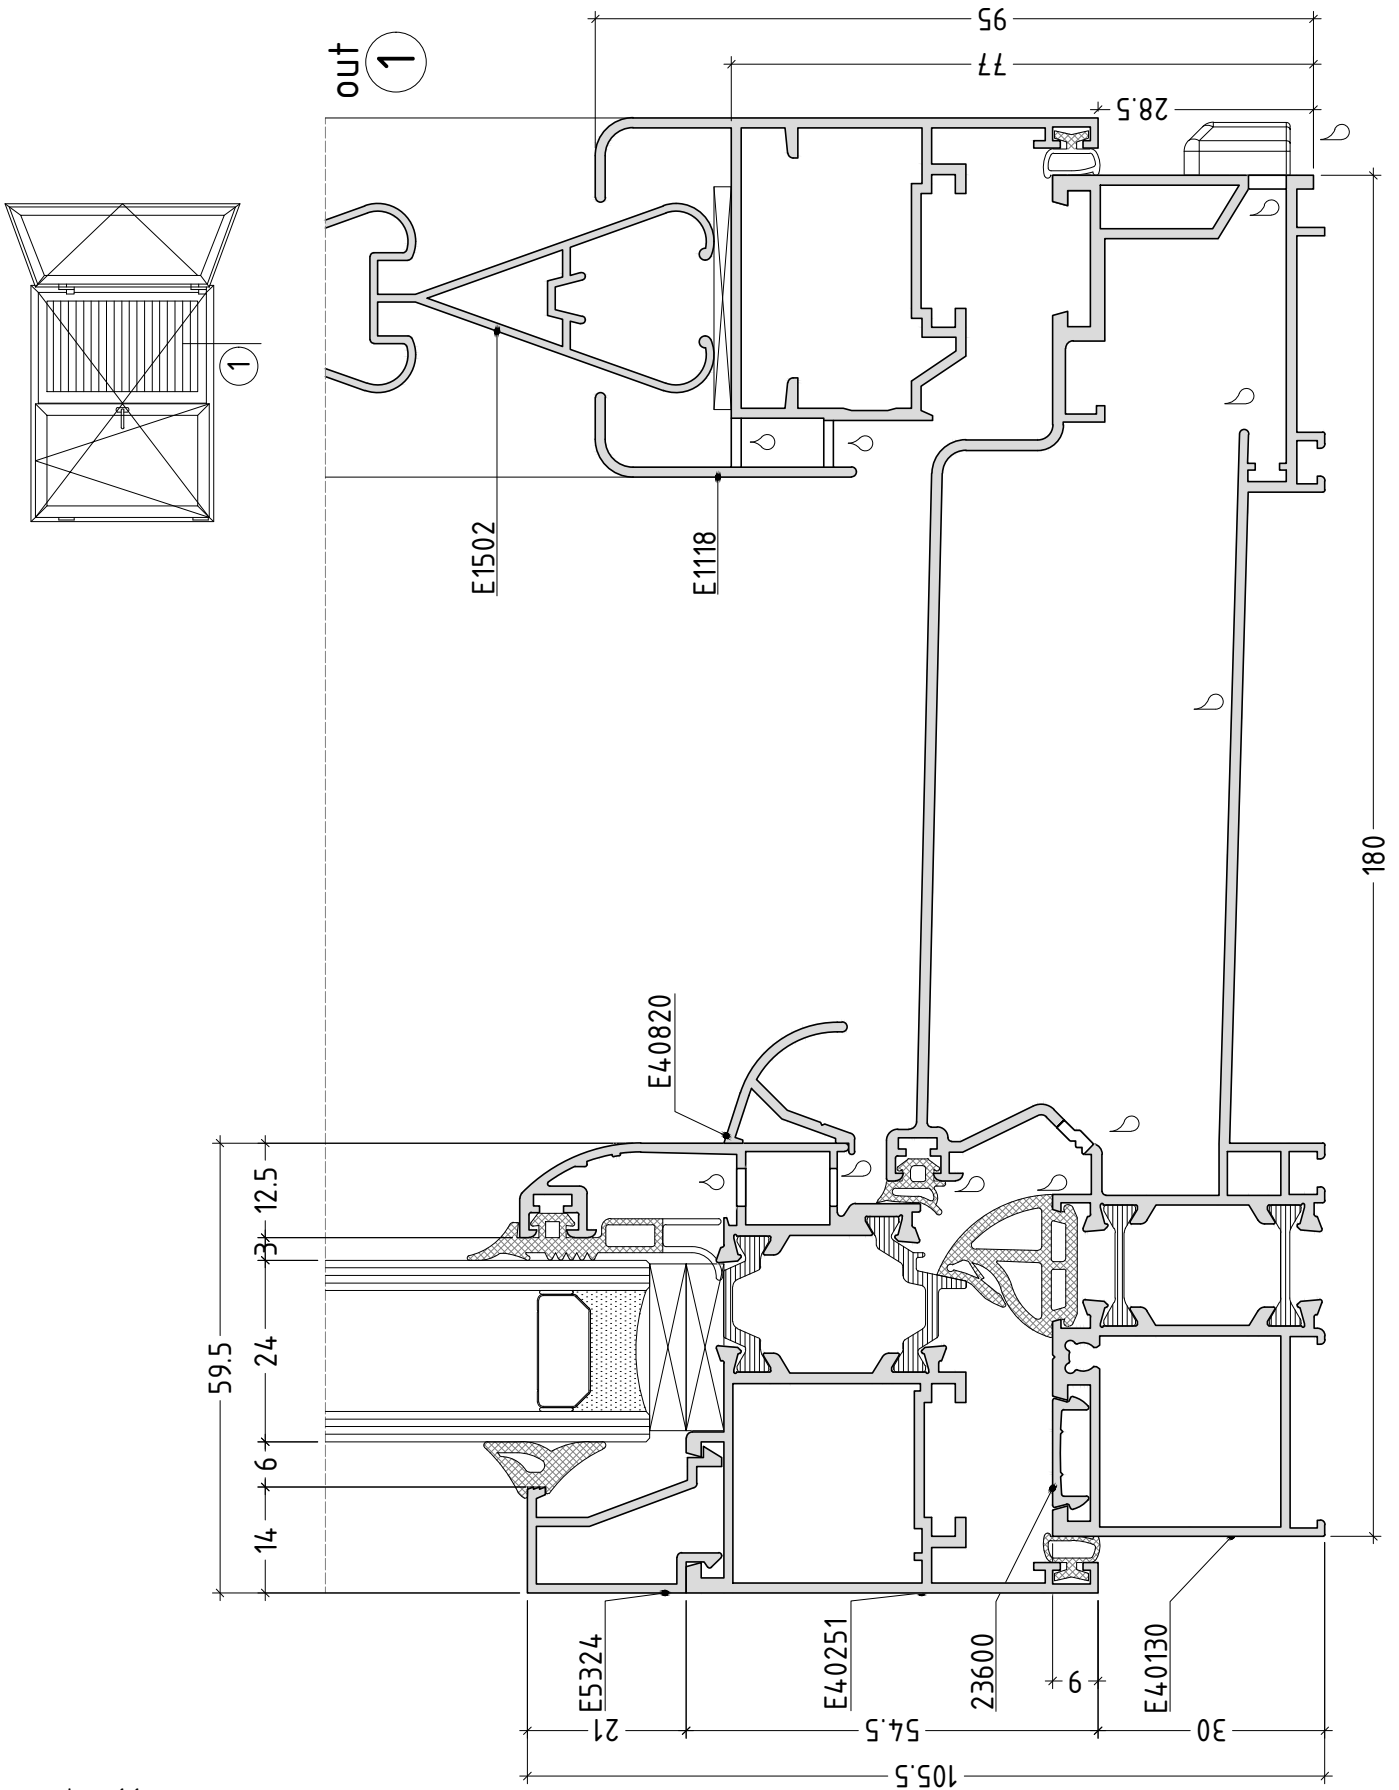

scale : 1:1


D40-31

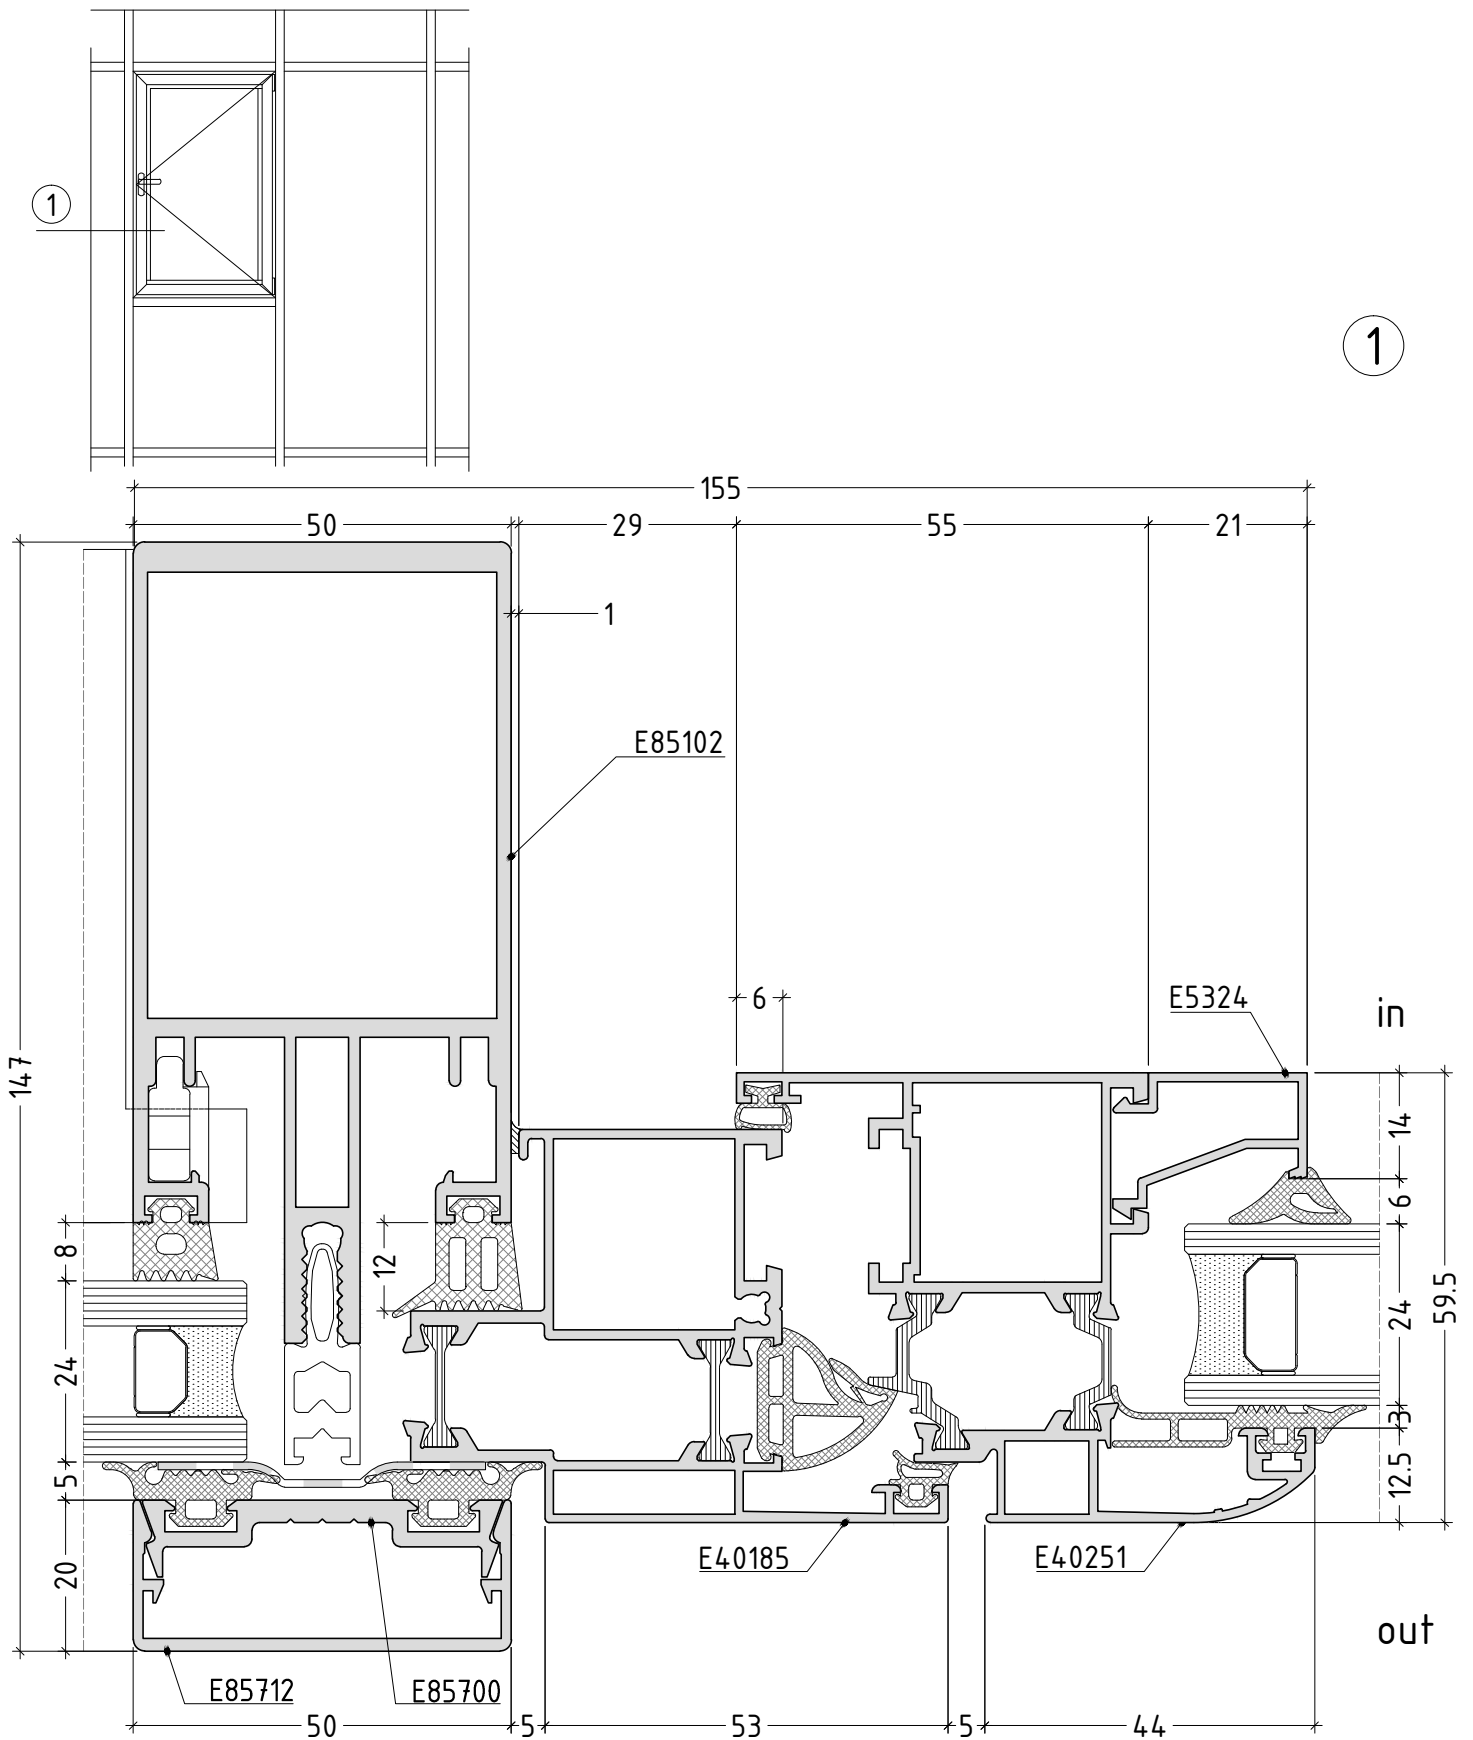

scale : 1:1

D40-32

parallel sliding and tilting door

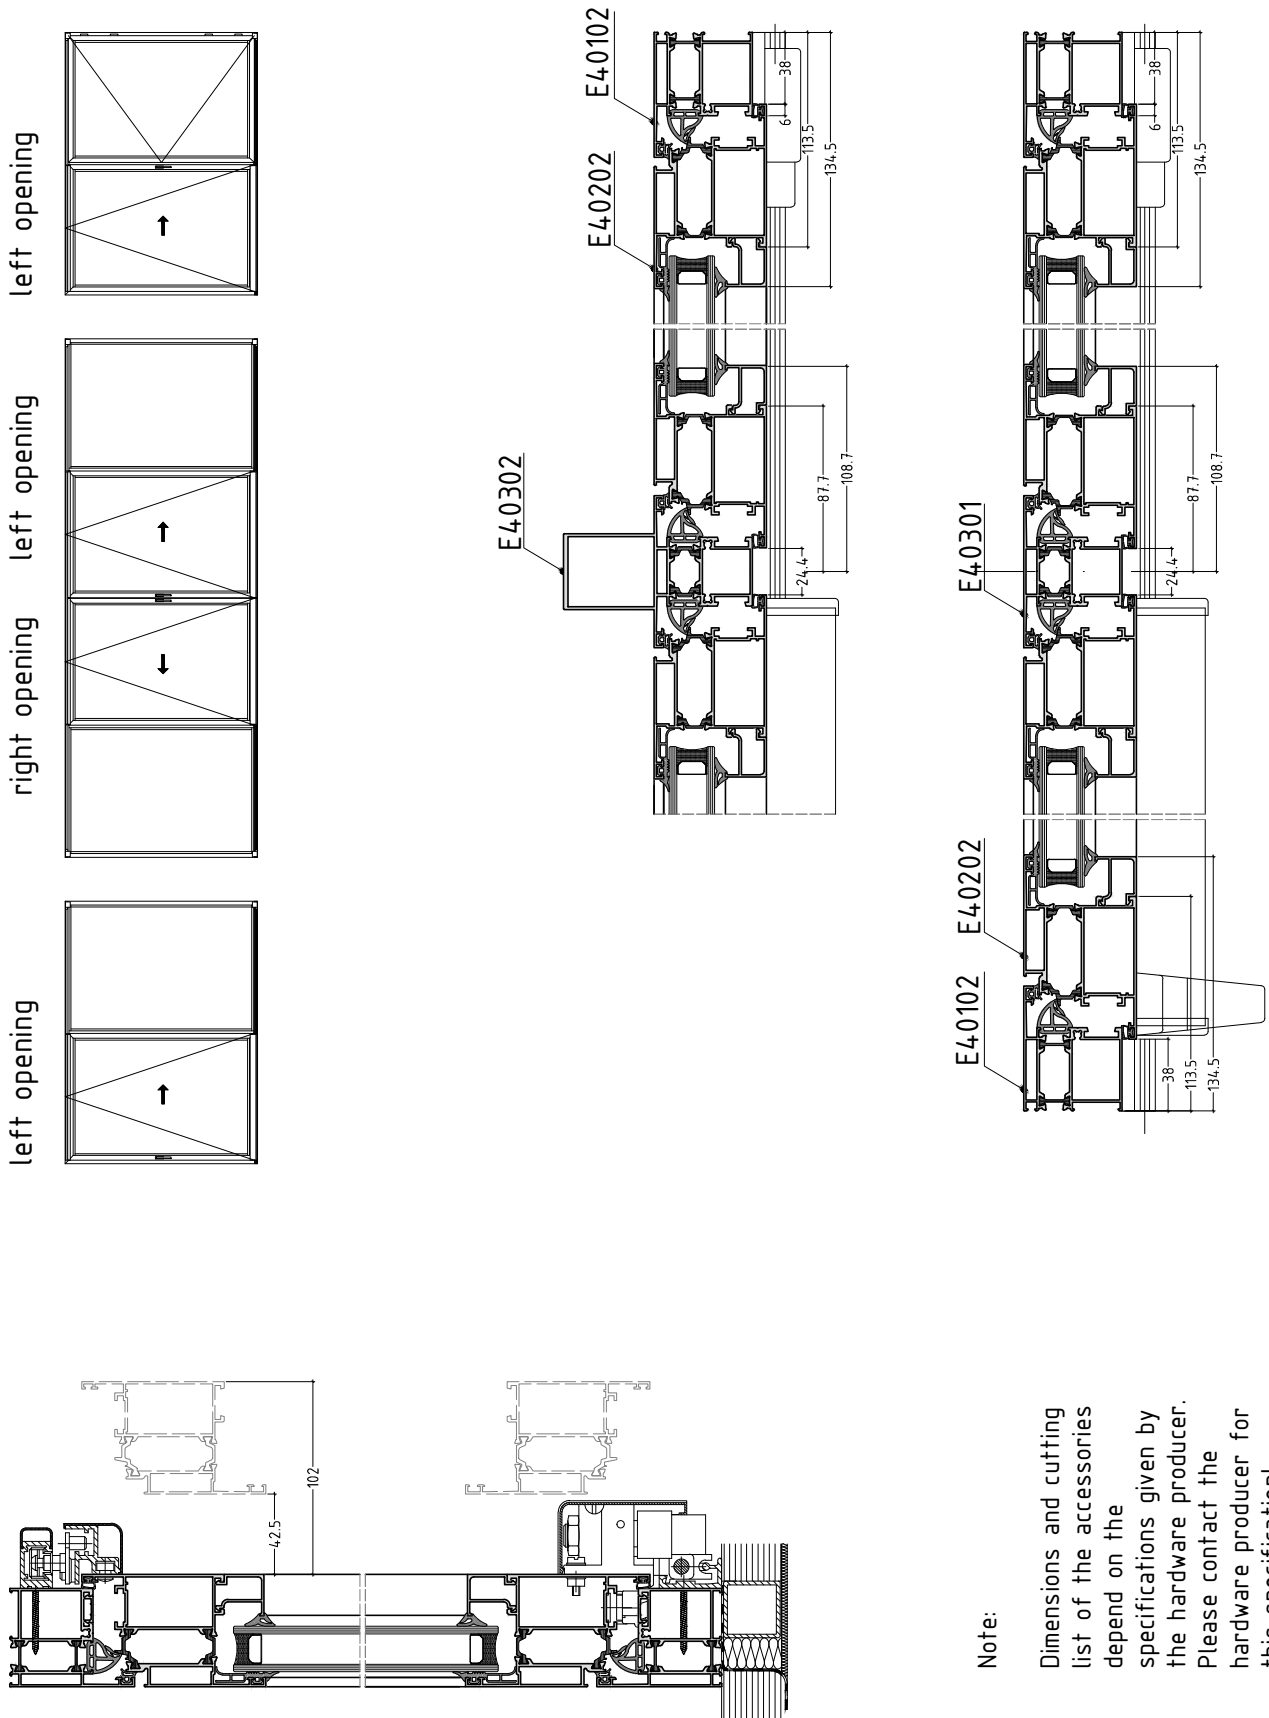


Note:

Dimensions and cutting list of the accessories depend on the specifications given by the hardware producer. Please contact the hardware producer for this specification!


scale : 1:1

sliding - folding door

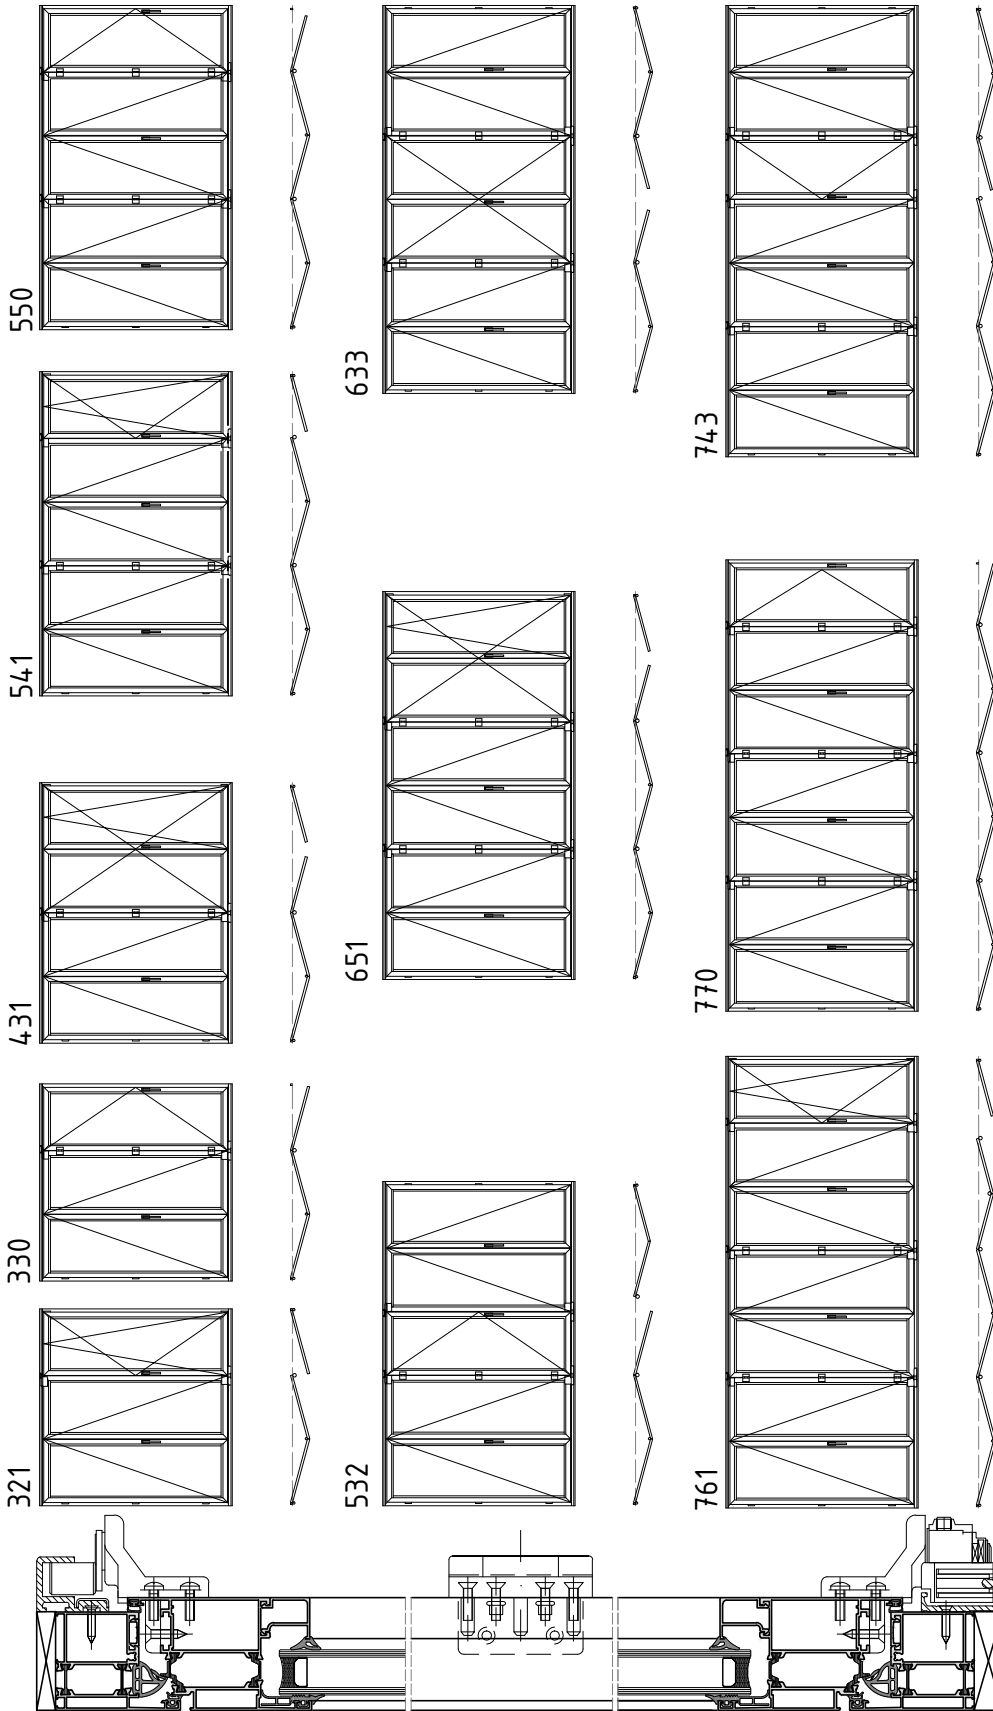

Note:


Dimensions and cutting list of the accessories depend on the specifications given by the hardware producer. Please contact the hardware producer for this specification!

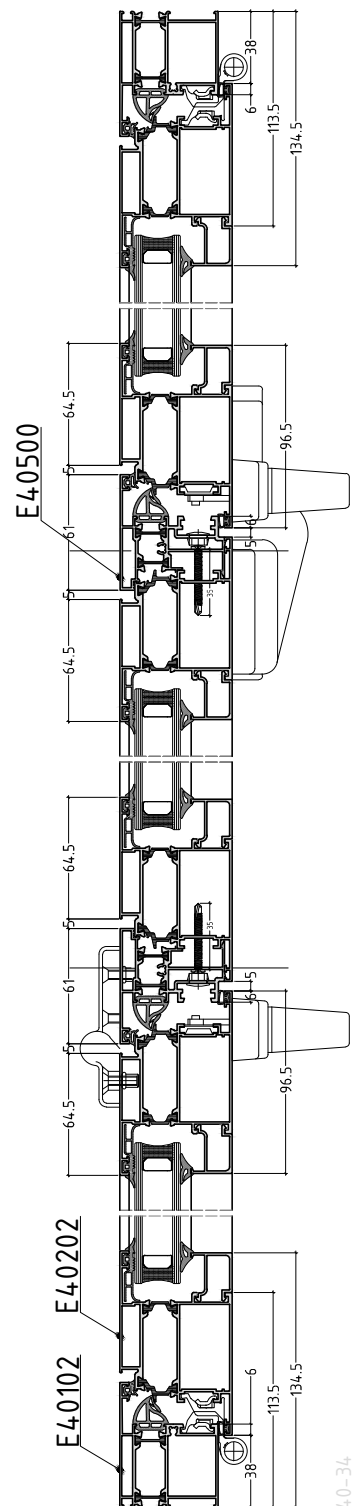


scale : 1:1



inward opening



①


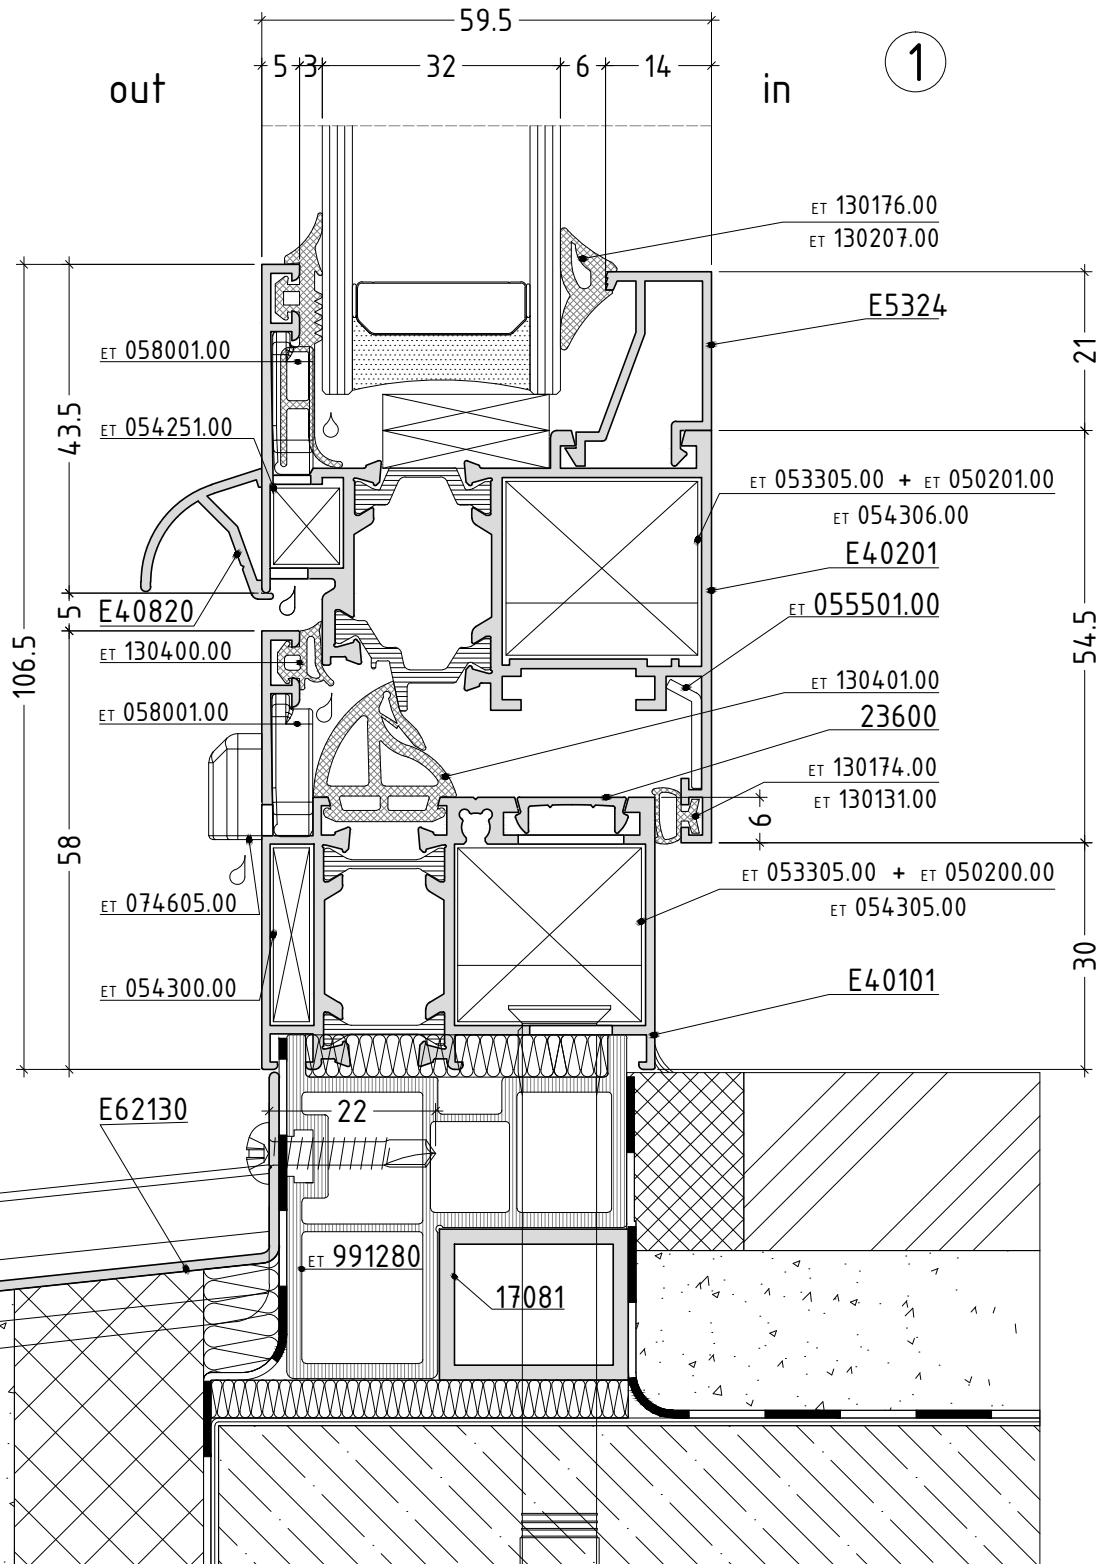


Interface shown on the drawing is an example ONLY!

Connection between backing wall and frame is specific for each single project. It is obligatory to observe different projects' features. All final decisions about materials used, interface finishing, etc. should be approved by the structural / façade engineer responsible for the specific project.

scale : 1:1

inward opening

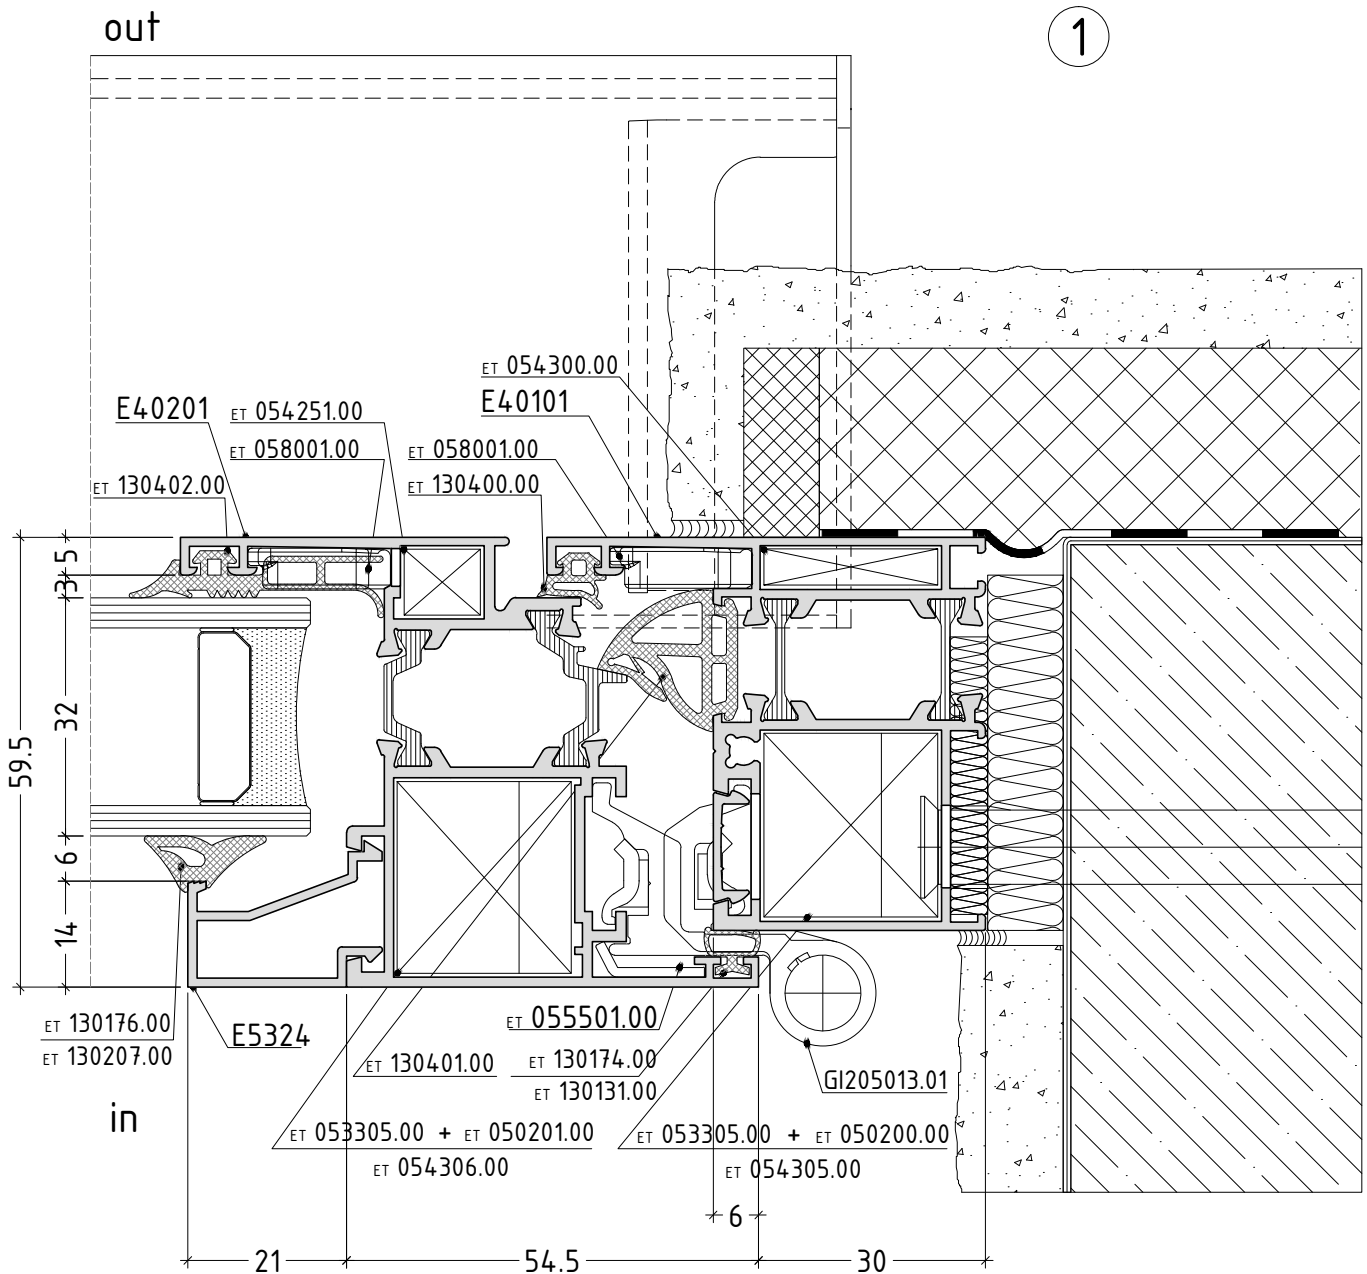


Interface shown on the drawing is an example ONLY!


Connection between backing wall and frame is specific for each single project. It is obligatory to observe different projects' features. All final decisions about materials used, interface finishing, etc. should be approved by the structural / façade engineer responsible for the specific project.

scale : 1:1

inward opening



1

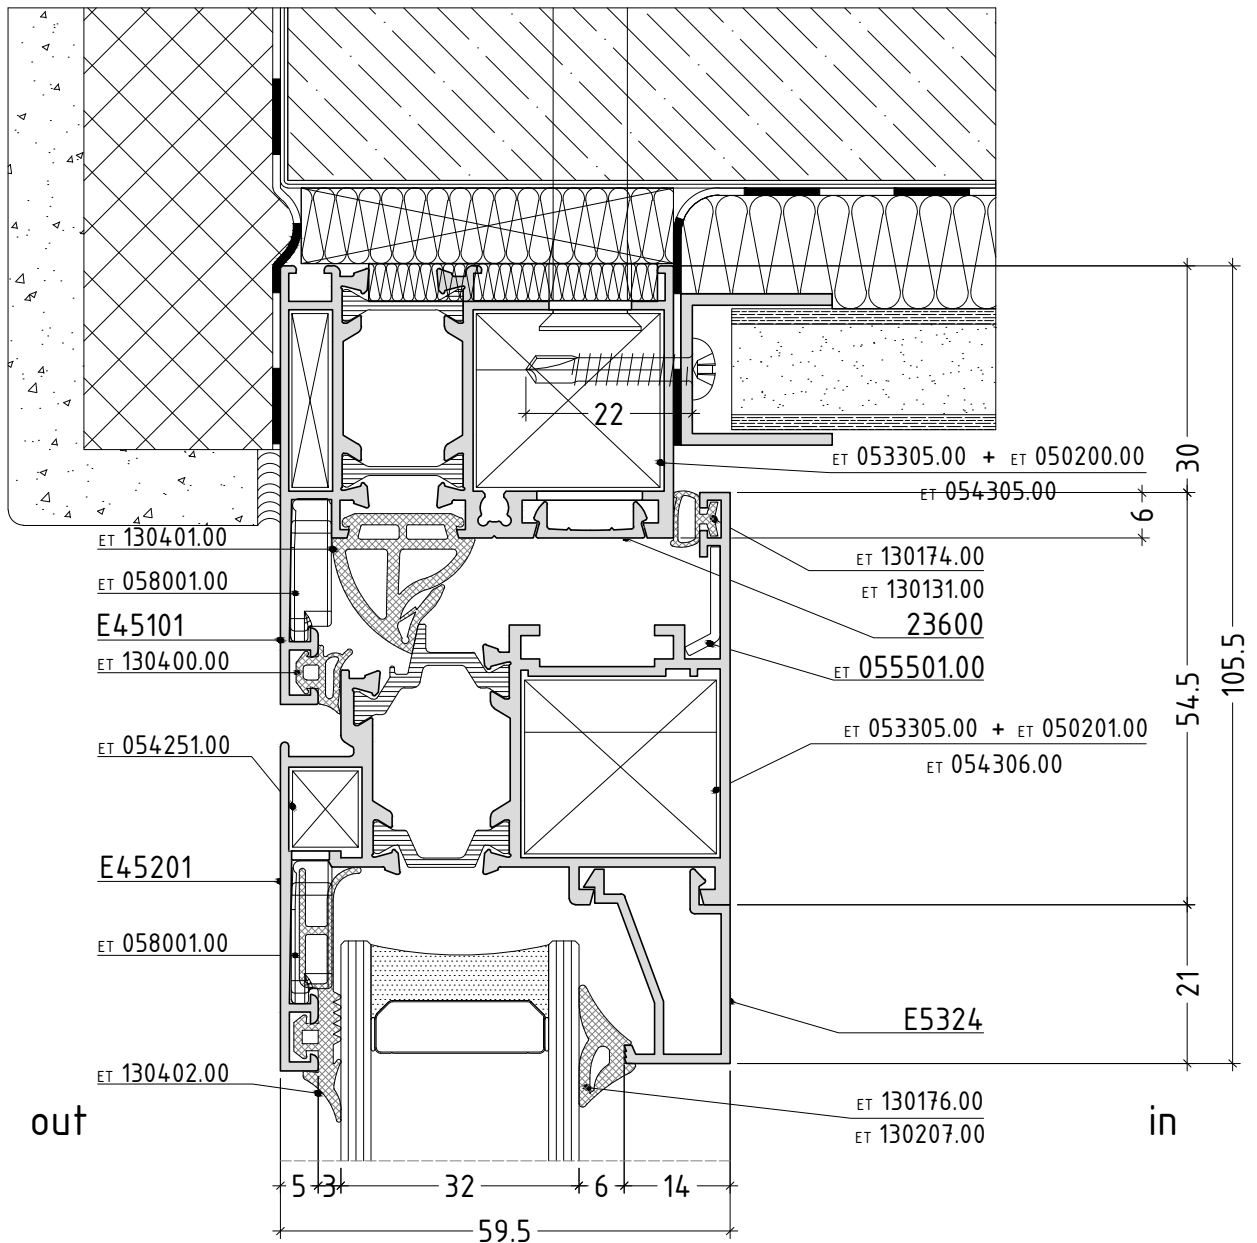





























Interface shown on the drawing is an example ONLY!

Connection between backing wall and frame is specific for each single project. It is obligatory to observe different projects' features. All final decisions about materials used, interface finishing, etc. should be approved by the structural / façade engineer responsible for the specific project.
































scale : 1:1

# GLAZING OPTIONS

| GLAZING OPTIONS  |   |   |   |   |   |   |   |   |
|--|---|---|---|---|---|---|---|---|
| external gaskets   | INTERNAL GASKETS  |   |   |   |   | GLAZING BEADS   |   |   |
|  | 5 - 6 mm<br>130176  | 6 mm<br>130207  | 7 mm<br>130207  | 8 mm<br>130208  | 10 mm<br>130210   |   |   |   |
|  3 mm<br>130411<br> 130402<br> 4 mm<br>130153 |  |  |  |  |  |           |          |   |
|  | X mm  |   |   |   |   | 1   | 2   | 3   |
| 130411<br>130402   | 32  | 31  | 30  | 29  | 27  |  E114.4    |  E1114   |   |
| 130153   | 31  | 30  | 29  | 28  | 26  |   |   |   |
| 130411<br>130402   | 29  | 28  | 27  | 26  | 24  |  E60110  |  E1130   |   |
| 130153   | 28  | 27  | 26  | 25  | 23  |   |   |   |
| 130411<br>130402   | 25  | 24  | 23  | 22  | 20  |  E5324     |   |   |
| 130153   | 24  | 23  | 22  | 21  | 19  |   |   |   |
| 130411<br>130402   | 22  | 21  | 20  | 19  | 17  |  E5311   |   |   |
| 130153   | 21  | 20  | 19  | 18  | 16  |   |   |   |
| 130411<br>130402   | 20  | 19  | 18  | 17  | 15  |  E5304    |  E5314  |  E5394  |
| 130153   | 19  | 18  | 17  | 16  | 14  |   |   |   |
| 130411<br>130402   | 17  | 16  | 15  | 14  | 12  |  E1113   |  E5312 |   |
| 130153   | 16  | 15  | 14  | 13  | 11  |   |   |   |
| 130411<br>130402   | 14  | 13  | 12  | 11  | 9   |  E5307   |  E5316 |  E5308 |
| 130153   | 13  | 12  | 11  | 10  | 8   |   |   |   |
| 130411<br>130402   | 12  | 11  | 10  | 9   | 7   |  E5325 |   |   |
| 130153   | 11  | 10  | 9   | 8   | 6   |   |   |   |
| 130411<br>130402   | 10  | 9   | 8   | 7   | 5   |  E5397   |   |   |
| 130153   | 9   | 8   | 7   | 6   | 4   |   |   |   |
| 130411<br>130402   | 8   | 7   | 6   | 5   | -   |  E5380   |   |  E5393 |
| 130153   | 7   | 6   | 5   | 4   | -   |   |   |   |

Note:  
Tolerance in dimension chain  $\pm 0.5\text{mm}$

T40-01









| GLAZING OPTIONS  |  |  |  |  |   |   |   |   |   |  |  |
|--|--|--|--|--|---|---|---|---|---|--|--|
| external gaskets   | INTERNAL GASKETS   |  |  |  |   | GLAZING BEADS   |   |   |   |  |  |
|  3 mm<br>130411 |  5 - 6 mm<br>130176 |  7 - 8 mm<br>130177 |  |  |   |  For profile E40200<br>E40201<br>E40202<br>E40230<br>E40240<br>E40330<br>E40340 |   |   |   |  |  |
|  |  5 mm<br>990619     |  6 mm<br>130207     |  7 mm<br>130207 |  8 mm<br>130208 |  10 mm<br>130210 |   |   |   |   |  |  |
|  4 mm<br>130153 | X mm   |  |  |  |   | 1   | 2   | 3   |   |  |  |
| 130411<br>130402   | 39   | 38   | 37   | 36   | 34  |  E1144   |  E1114   |   |   |  |  |
| 130153   | 38   | 37   | 36   | 35   | 33  |   |   |   |   |  |  |
| 130411<br>130402   | 36   | 35   | 34   | 33   | 31  |   |   |  E60110  |  E1130   |  |  |
| 130153   | 35   | 34   | 33   | 32   | 30  |   |   |   |   |  |  |
| 130411<br>130402   | 32   | 31   | 30   | 29   | 27  |  E5324   |   |   |   |  |  |
| 130153   | 31   | 30   | 29   | 28   | 26  |   |   |   |   |  |  |
| 130411<br>130402   | 29   | 28   | 27   | 26   | 24  |   |   |  E5311   |   |  |  |
| 130153   | 28   | 27   | 26   | 25   | 23  |   |   |   |   |  |  |
| 130411<br>130402   | 28   | 27   | 26   | 25   | 23  |  E5304  |  E5314  |  E5394  |   |  |  |
| 130153   | 27   | 26   | 25   | 24   | 22  |   |   |   |   |  |  |
| 130411<br>130402   | 24   | 23   | 22   | 21   | 19  |  E1113   |  E5312 |   |   |  |  |
| 130153   | 23   | 22   | 21   | 20   | 18  |   |   |   |   |  |  |
| 130411<br>130402   | 21   | 20   | 19   | 18   | 16  |  E5307   |  E5316 |  E5308 |   |  |  |
| 130153   | 20   | 19   | 18   | 17   | 15  |   |   |   |   |  |  |
| 130411<br>130402   | 19   | 18   | 17   | 16   | 14  |   |   |  E5325 |   |  |  |
| 130153   | 18   | 17   | 16   | 15   | 13  |   |   |   |   |  |  |
| 130411<br>130402   | 18   | 17   | 16   | 15   | 13  |  E5397   |   |   |   |  |  |
| 130153   | 17   | 16   | 15   | 14   | 12  |   |   |   |   |  |  |
| 130411<br>130402   | 16   | 15   | 14   | 13   | 11  |  E5380   |   |   |  E5393 |  |  |
| 130153   | 15   | 14   | 13   | 12   | 10  |   |   |   |   |  |  |
| 130411<br>130402   | 14   | 13   | 12   | 11   | 9   |  E60132  |   |   |   |  |  |
| 130153   | 13   | 12   | 11   | 10   | 8   |   |   |   |   |  |  |
| 130411<br>130402   | 12   | 11   | 10   | 9  | 7   |  E5305   |   |   |  E5309 |  |  |
| 130153   | 11   | 10   | 9  | 8  | 6   |   |   |   |   |  |  |

Note:  
Tolerance in dimension chain  $\pm 0.5\text{mm}$

T40-02








# CUTTING LISTS

## calculation of cutting length for one leaf window






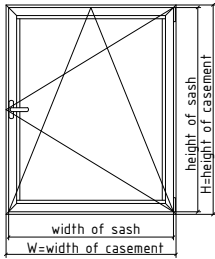







|                 |   | sash profile selection  | PVC groove     |        |
|--|---|---|----------------|--------|
| frame profile selection  |   |   |                |        |
| E40200<br>E40201<br>E40202<br>E40240<br>E40250<br>E40251<br>E40252<br>E40290<br>E40281<br>E40241 |   |  | E40221         |        |
|  |   |   | E40222         |        |
| E40100<br>E40150<br>E40180   |    |   | width of sash  | W - 35 |
|  |   |   | height of sash | H - 35 |
| E40101<br>E40130<br>E40151<br>E40154<br>E40153   |   |   | width of sash  | W - 61 |
|  |   |   | height of sash | H - 61 |
| E40102<br>E40152   |  |   | width of sash  | W - 77 |
|  |   |   | height of sash | H - 77 |
| E40121   |  |   | width of sash  | W - 81 |
|  |   |   | height of sash | H - 81 |
| E40185   |  |   | width of sash  | W - 87 |
|  |   |   | height of sash | H - 87 |











## calculation of cutting length for two leaf window
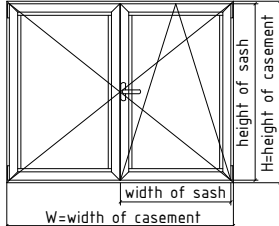
|    |                                  | sash profile selection   | PVC groove   |
|---|----------------------------------|--|--|
|    |                                  | E40200<br>E40201<br>E40202<br>E40240<br>E40250<br>E40251<br>E40252<br>E40290<br>E40281<br>E40241 | E40221<br>E40222<br>E40271<br>E40272<br>E40275<br>E40295 |
| E40100<br>E40150<br>E40180<br>                     | width of sash                    | $\frac{W - 40}{2}$   |  |
|   | height of sash                   | H - 35   |  |
|   | height of secondary sash profile | H - 107  |  |
| E40101<br>E40130<br>E40151<br>E40154<br>E40153<br> | width of sash                    | $\frac{W - 66}{2}$   | $\frac{W - 62}{2}$                                       |
|   | height of sash                   | H - 61   | H - 57   |
|   | height of secondary sash profile | H - 133  | H - 133  |
| E40102<br>E40152<br>                             | width of sash                    | $\frac{W - 82}{2}$   |  |
|   | height of sash                   | H - 77   |  |
|   | height of secondary sash profile | H - 149  |  |
| E40121<br>                                       | width of sash                    | $\frac{W - 86}{2}$   | $\frac{W - 82}{2}$                                       |
|   | height of sash                   | H - 81   | H - 77   |
|   | height of secondary sash profile | H - 153  | H - 153  |
| E40185<br>                                       | width of sash                    | $\frac{W - 92}{2}$   | $\frac{W - 88}{2}$                                       |
|   | height of sash                   | H - 87   | H - 83   |
|   | height of secondary sash profile | H - 159  | H - 159  |

## calculation of cutting length for one leaf door with door threshold profile
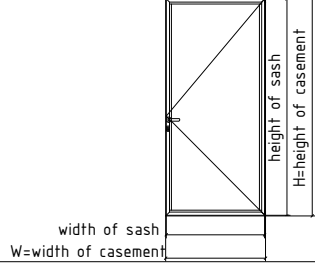
|   |                | sash profile selection<br>E40200<br>E40201<br>E40202<br>E40240<br>E40250<br>E40251<br>E40252<br>E40290<br>E40281<br>E40241 | PVC groove<br>E40221<br>E40222<br>E40271<br>E40272<br>E40275<br>E40295                          |   |
|--|----------------|--|---|---|
| frame profile selection<br>E40100<br>E40150<br>E40180<br> |                |  |               |  |
| E40100<br>E40150<br>E40180<br>                            | width of sash  | W - 35   |   |   |
|  | height of sash | H - 24.5   |   |   |
| E40101<br>E40130<br>E40151<br>E40154<br>E40153<br>        | width of sash  | W - 61   | W - 57  |   |
|  | height of sash | H - 37.5   | H - 35.5  |   |
| E40102<br>E40152<br>                                    | width of sash  | W - 77   |   |   |
|  | height of sash | H - 45.5   |   |   |
| E40121<br>  | width of sash  | W - 81   | W - 77  |   |
|  | height of sash | H - 47.5   | H - 45.5  |   |
| E40185<br>  | width of sash  | W - 87   | W - 81  |   |
|  | height of sash | H - 50.5   | H - 48.5  |   |
| four side sash with door threshold profile   |                | E40800<br>                             | E40800<br> |   |
|  |                | E40801<br>                             | E40801<br> |   |




calculation of cutting length for one leaf door with bottom rail and threshold profile
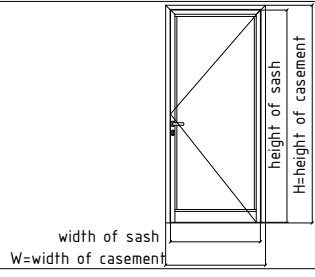
|  |  | sash profile selection   | PVC groove  |
|---|--|--|---|
| frame profile selection   |  | E40200<br>E40201<br>E40202<br>E40240<br>E40250<br>E40251<br>E40252<br>E40290<br>E40281<br>E40241                     | E40221<br>E40222<br>E40271<br>E40272<br>E40275<br>E40295                              |
| E40100<br>E40150<br>E40180  |     | width of sash<br>W - 35<br><br>height of sash<br>H - 36.5  |   |
| E40101<br>E40130<br>E40151<br>E40154<br>E40153                                    |     | width of sash<br>W - 61<br><br>height of sash<br>H - 49.5  | W - 57<br><br>H - 47.5  |
| E40102<br>E40152  |   | width of sash<br>W - 77<br><br>height of sash<br>H - 57.5  |   |
| E40121  |   | width of sash<br>W - 81<br><br>height of sash<br>H - 59.5  | W - 77<br><br>H - 57.5  |
| E40185  |   | width of sash<br>W - 87<br><br>height of sash<br>H - 62.5  | W - 83<br><br>H - 60.5  |
| three side sash with<br>door bottom rail<br>and<br>threshold profile              |  | E40330<br>door bottom rail<br>for straight<br>sash profile<br><br>E40331<br>door bottom rail<br><br>E40800<br>E40801 |  |


calculation of cutting length for two leaf door with bottom rail and threshold profile

| frame profile selection  |  | sash profile selection   | PVC groove   |
|--|--|--|--|
|  |  | E40200<br>E40201<br>E40202<br>E40240<br>E40250<br>E40251<br>E40252<br>E40290<br>E40281<br>E40241                     | E40221<br>E40222<br>E40271<br>E40272<br>E40275<br>E40295   |
| E40100<br>E40150<br>E40180   |  | width of sash  | $\frac{W - 40}{2}$   |
|  |  | height of sash   | H - 36.5   |
|  |  | height of secondary sash profile   | H - 72.5   |
| E40101<br>E40130<br>E40151<br>E40154<br>E40153                       |  | width of sash  | $\frac{W - 66}{2}$   |
|  |  | height of sash   | H - 49.5   |
|  |  | height of secondary sash profile   | H - 85.5   |
| E40102<br>E40152   |  | width of sash  | $\frac{W - 82}{2}$   |
|  |  | height of sash   | H - 57.5   |
|  |  | height of secondary sash profile   | H - 93.5   |
| E40121   |  | width of sash  | $\frac{W - 86}{2}$   |
|  |  | height of sash   | H - 59.5   |
|  |  | height of secondary sash profile   | H - 95.5   |
| E40185   |  | width of sash  | $\frac{W - 92}{2}$   |
|  |  | height of sash   | H - 62.5   |
|  |  | height of secondary sash profile   | H - 98.5   |
| three side sash with<br>door bottom rail<br>and<br>threshold profile |  | E40330<br>door bottom rail<br>for straight<br>sash profile<br><br>E40331<br>door bottom rail<br><br>E40800<br>E40801 | E40330<br>door bottom rail<br>for straight<br>sash profile<br><br>E40331<br>door bottom rail<br><br>E40800<br>E40801 |

calculation of cutting length for pivot mechanism
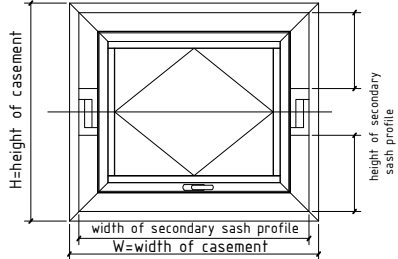
|   |                                  |  |  |
|---|----------------------------------|--|--|
|                 |                                  | <p>sash profile selection</p> <p>E40230<br/>pivot<br/>mechanism</p>  |  |
| <p>frame profile selection</p>  |                                  |  |  |
| <p>E40101</p>  | width of sash                    | W - 126  |  |
|   | height of sash                   | H - 126  |  |
|   | width of secondary sash profile  | H - 61   |  |
|   | height of secondary sash profile | $\frac{H - 211}{2}$  |  |

cutting list for profiles E40171

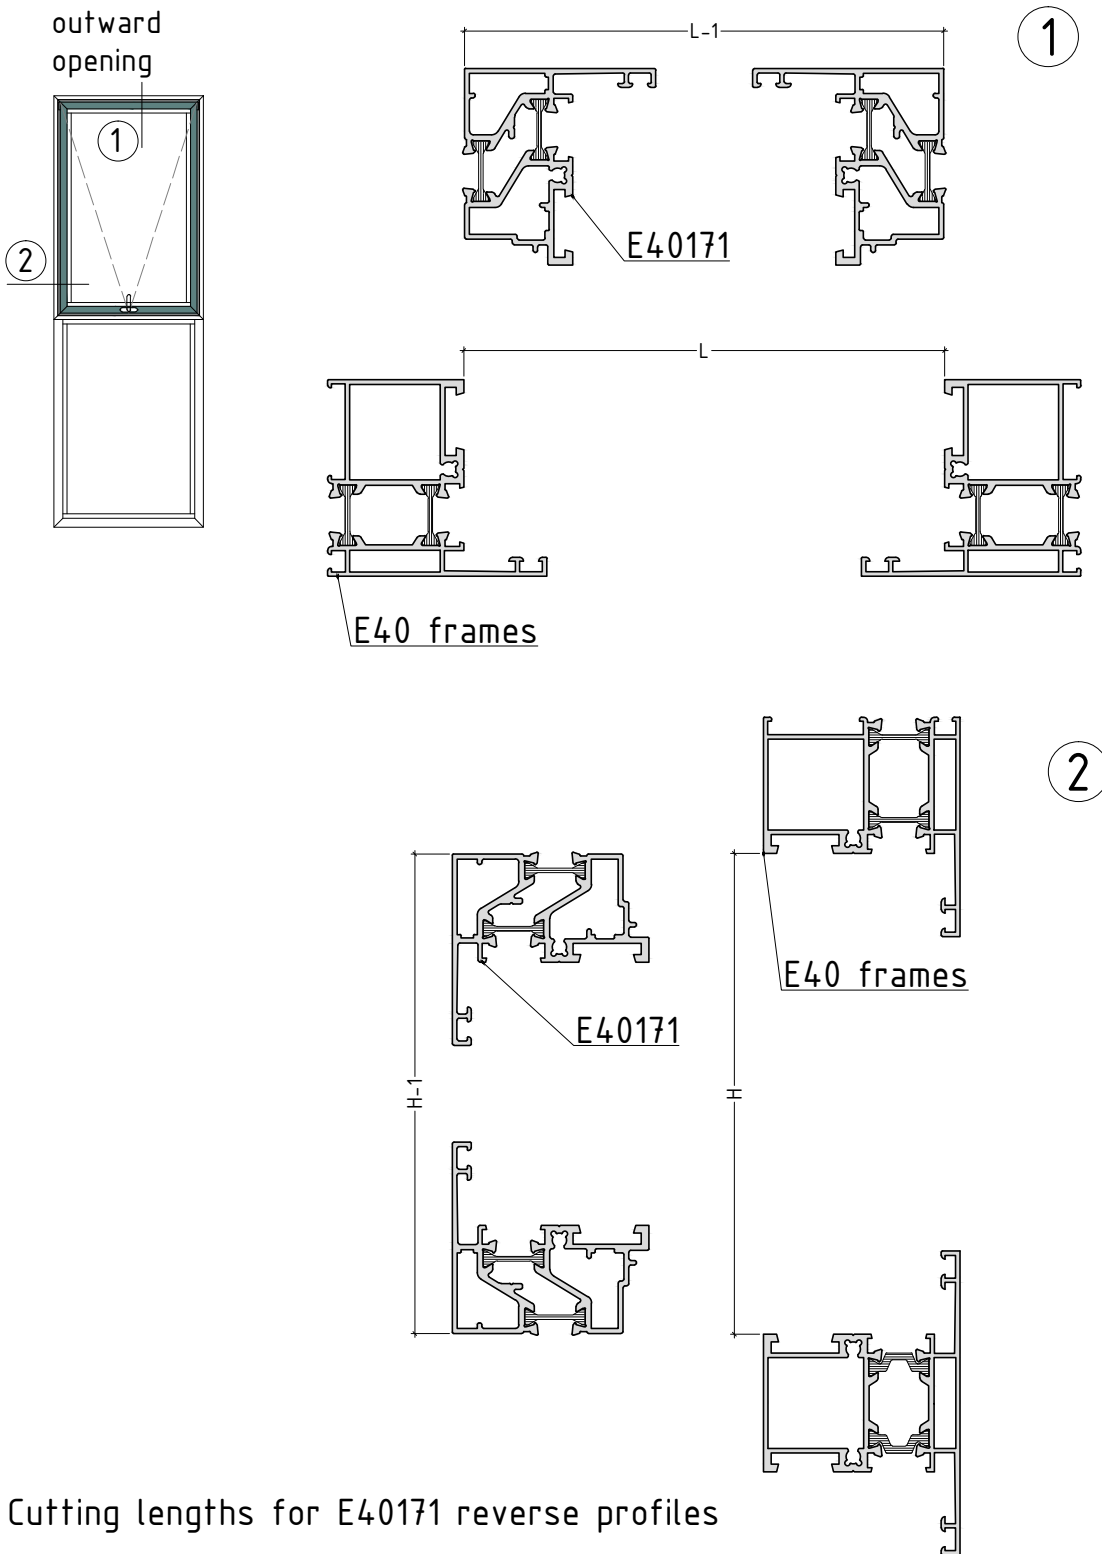


Cutting lengths for E40171 reverse profiles

L - 1mm

and

H - 1mm

cutting list for profiles E40241

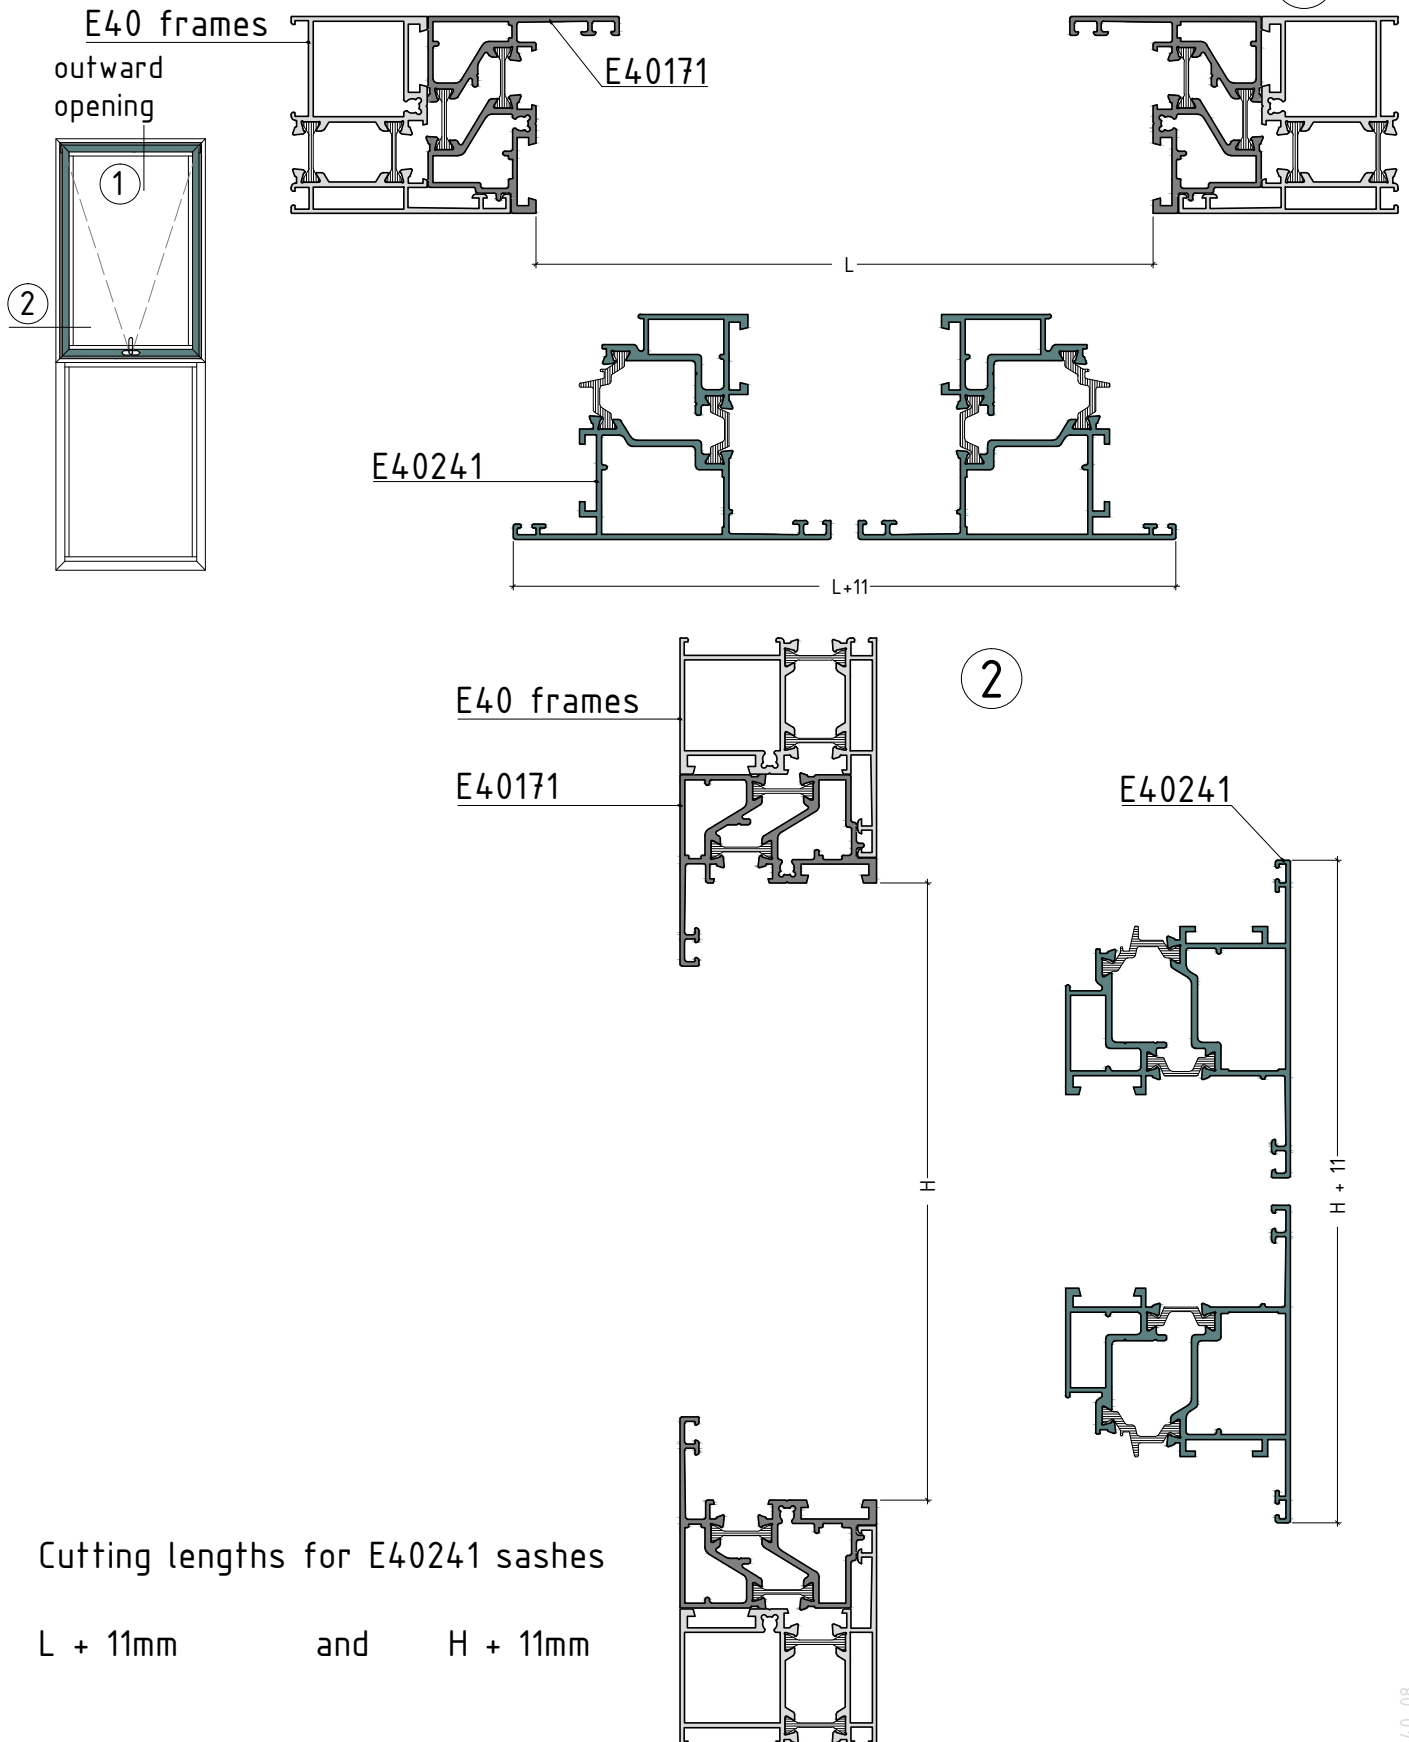



Cutting lengths for E40241 sashes

$L + 11\text{mm}$       and       $H + 11\text{mm}$


# MACHINING





machining to use die cast joints and al. joint corner bracket

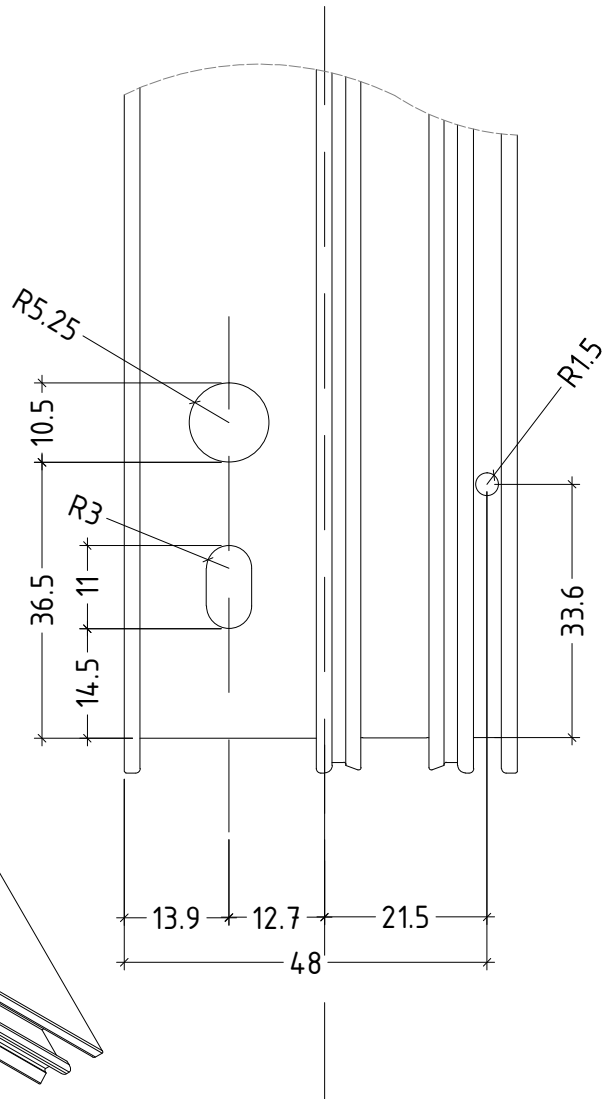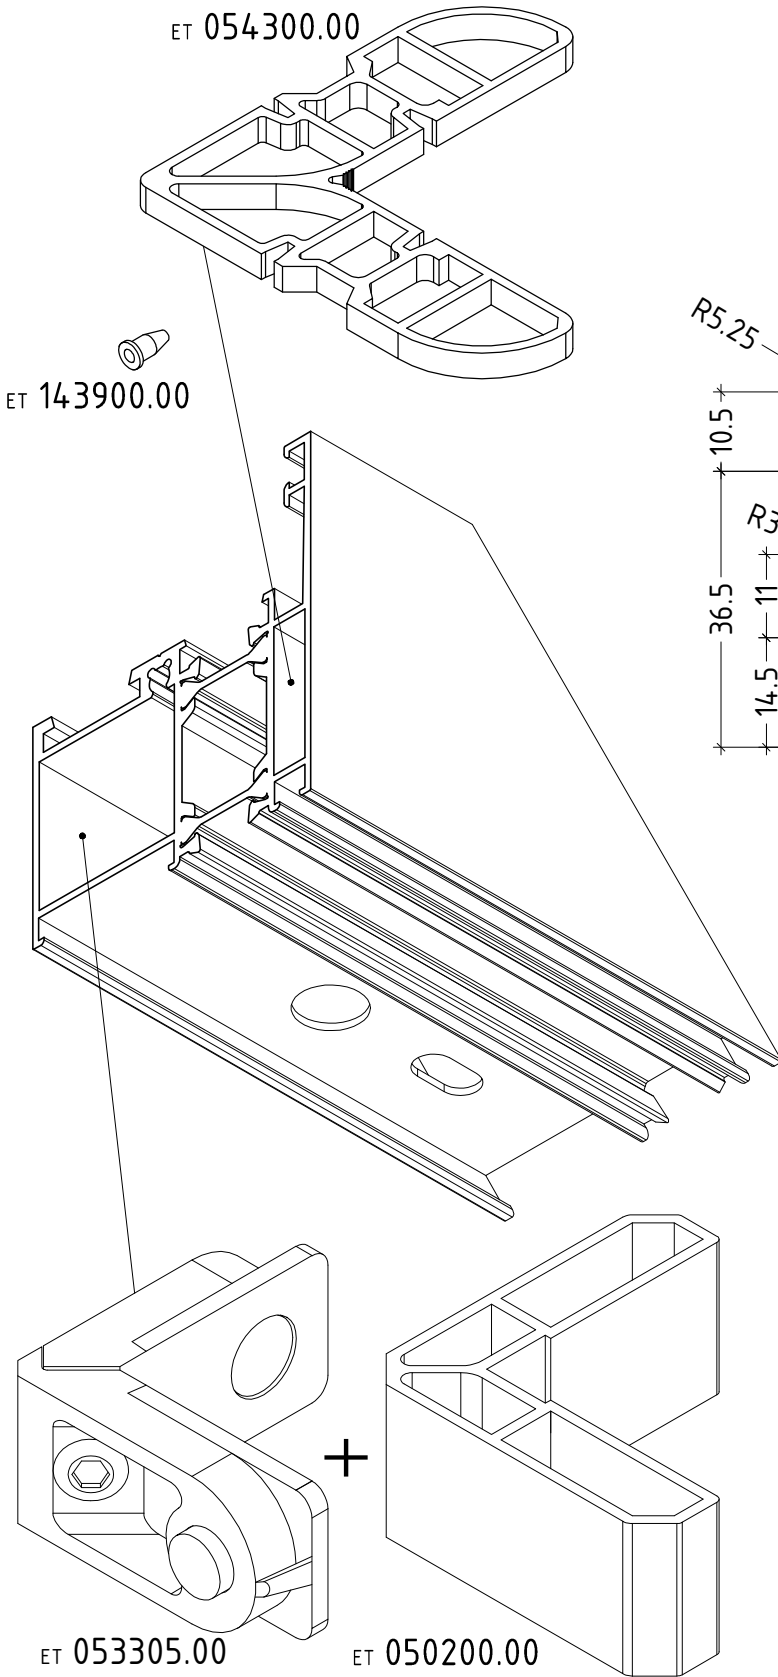


always use epoxy resin for long lasting joining

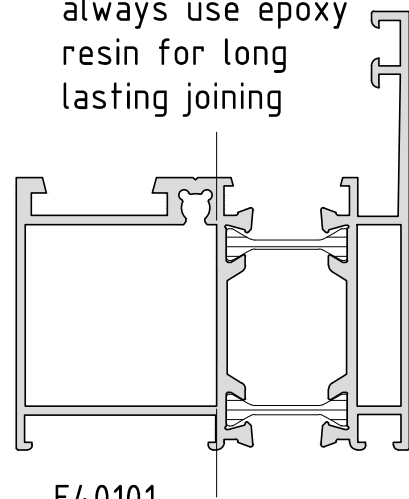

machining to use die cast joints and al. joint corner bracket

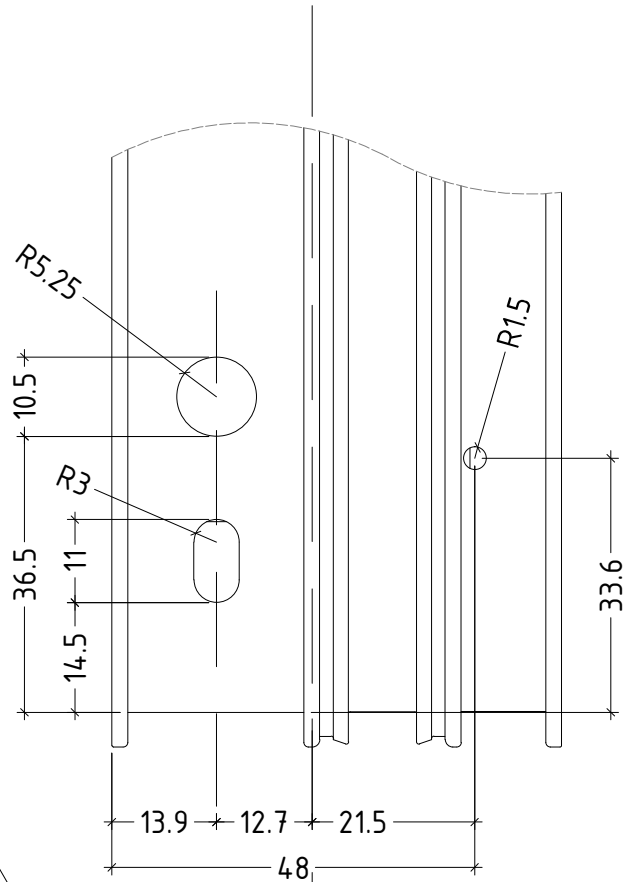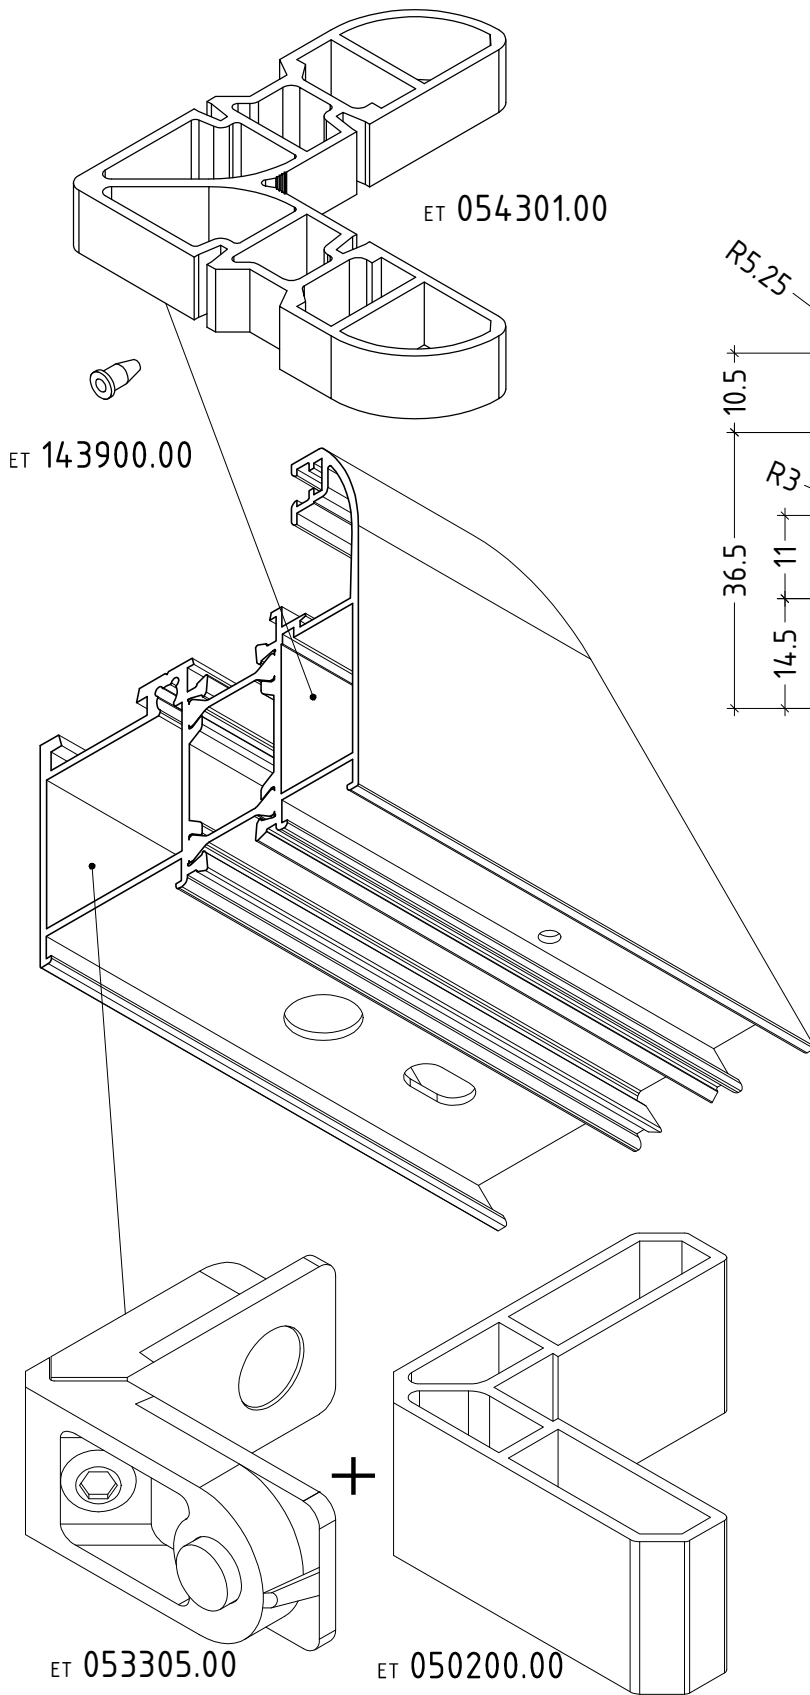





always use epoxy resin for long lasting joining

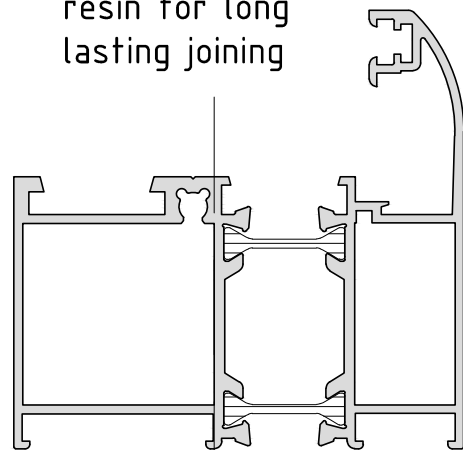

E40151


D40-02

machining to use die cast joints and al. joint corner bracket

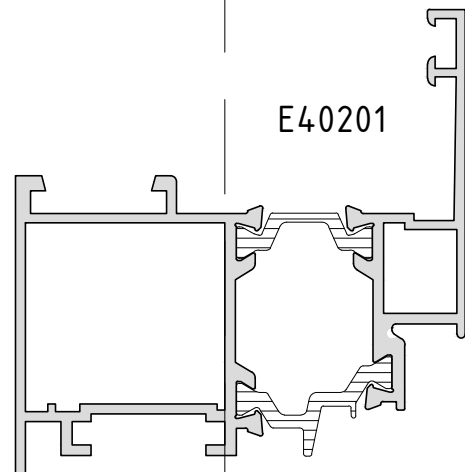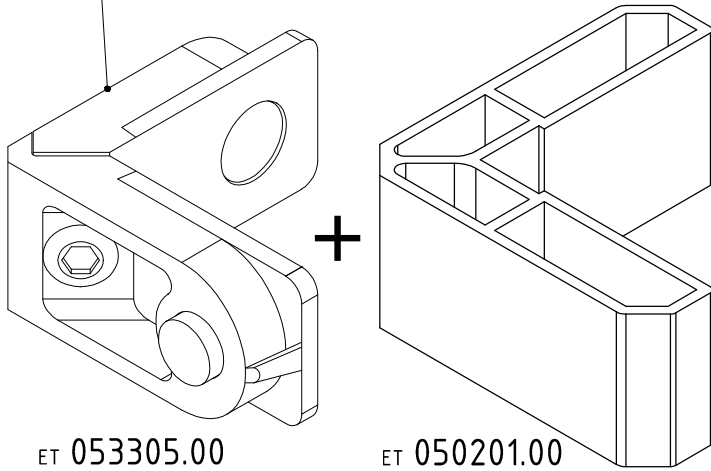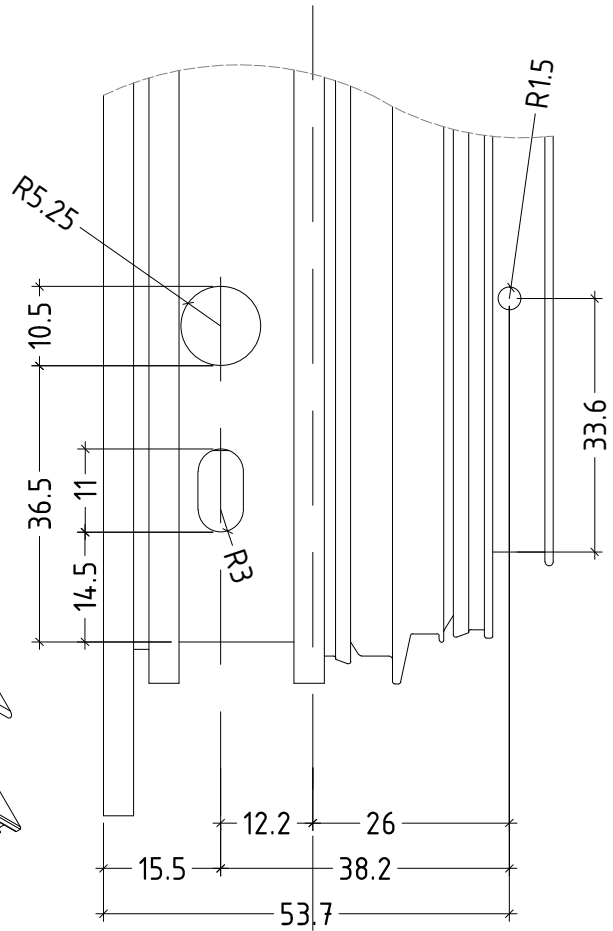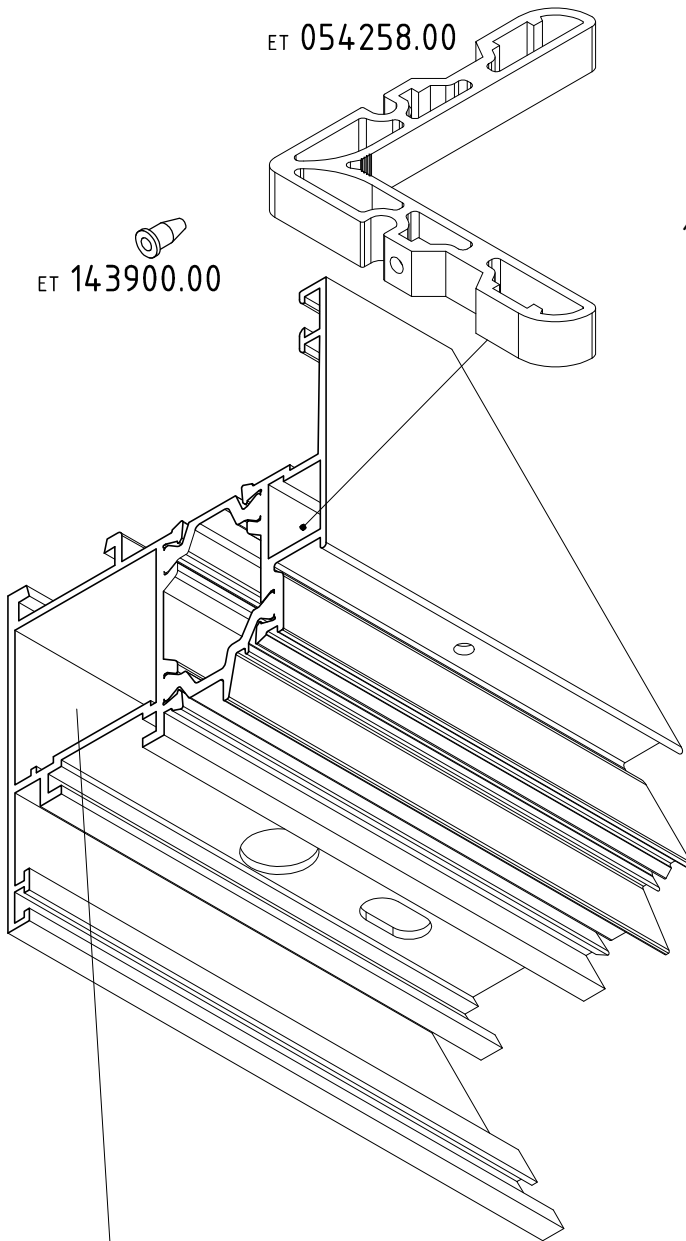


always use epoxy resin for long lasting joining

machining to use die cast joints and al. joint corner bracket

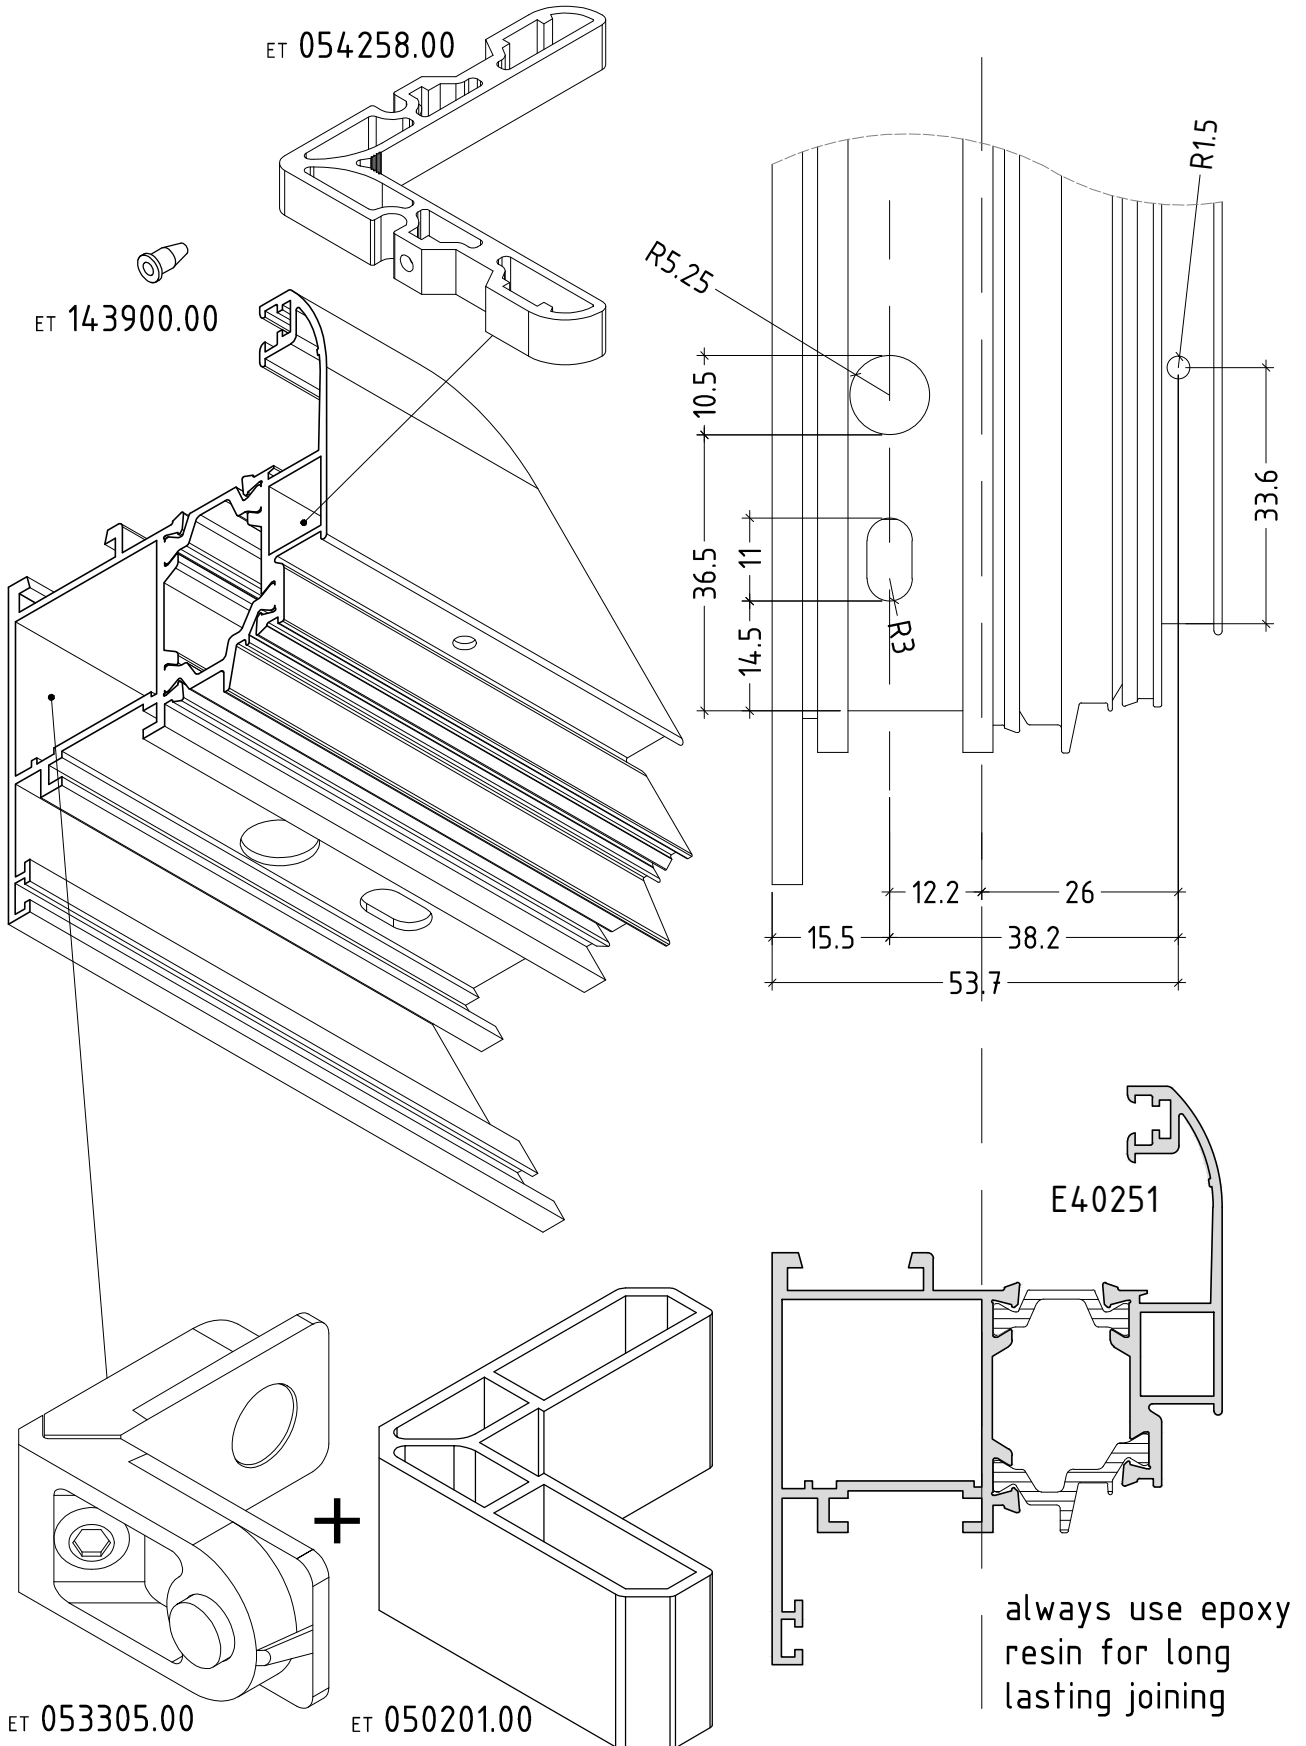


D40-04

machining to use roll pins extruded aluminum joint corner brackets

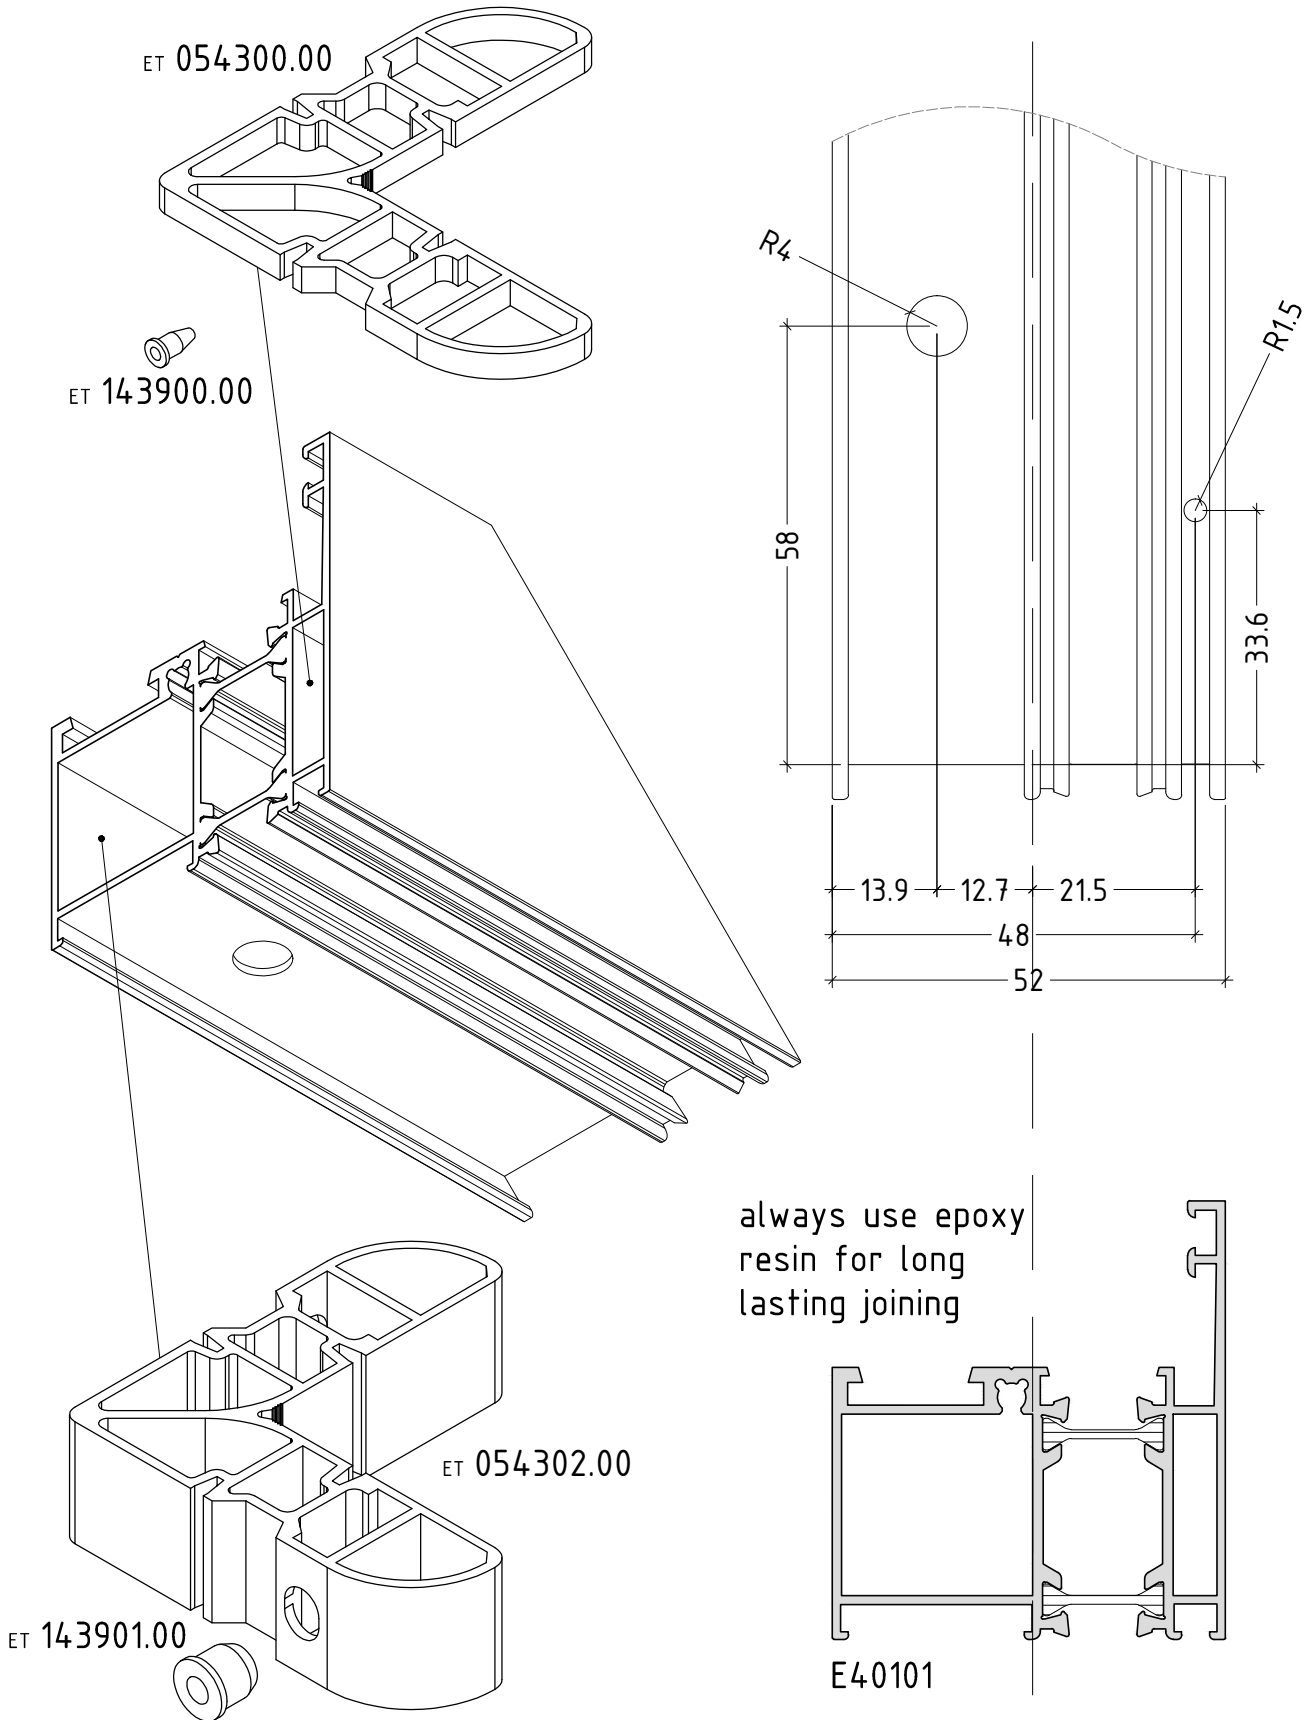





D40-05

machining to use roll pins extruded aluminum joint corner brackets

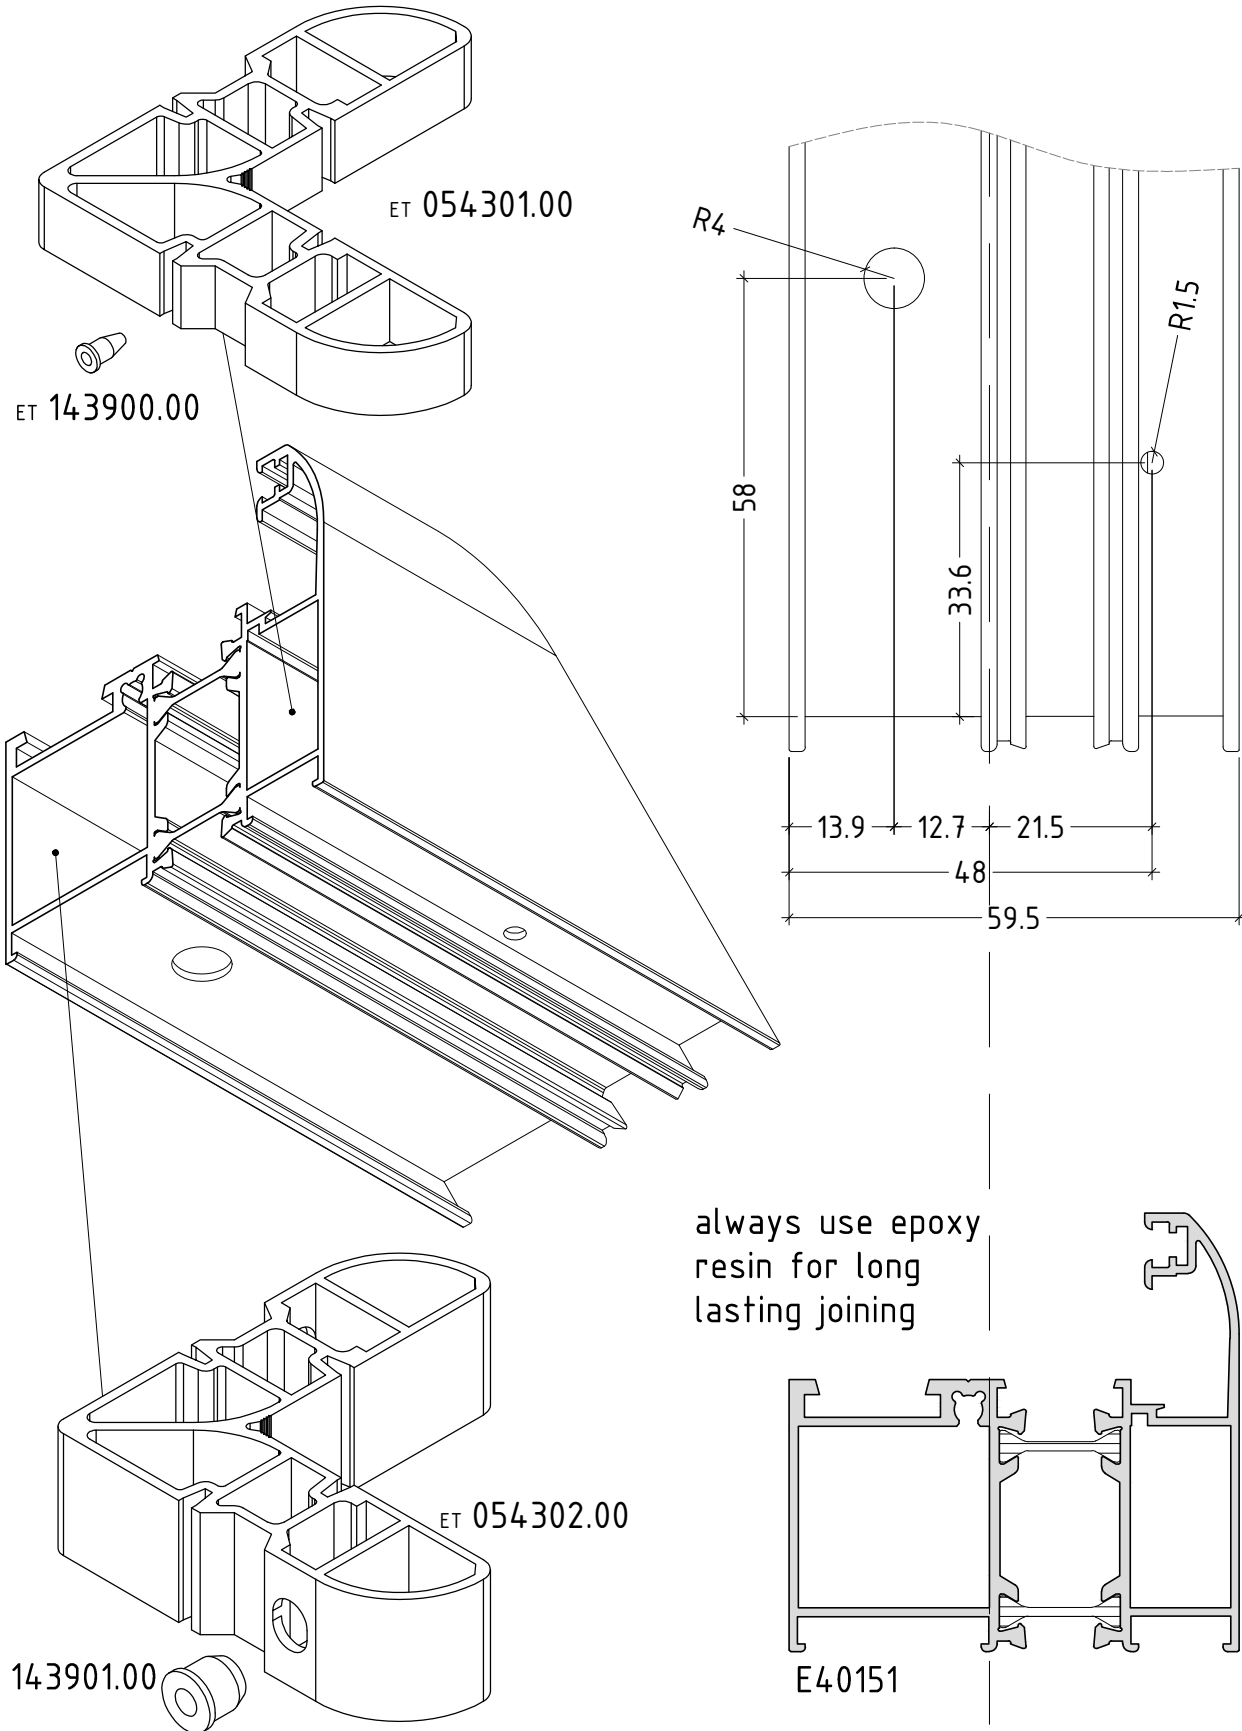

D40-06




machining to use roll pins extruded aluminum joint corner brackets

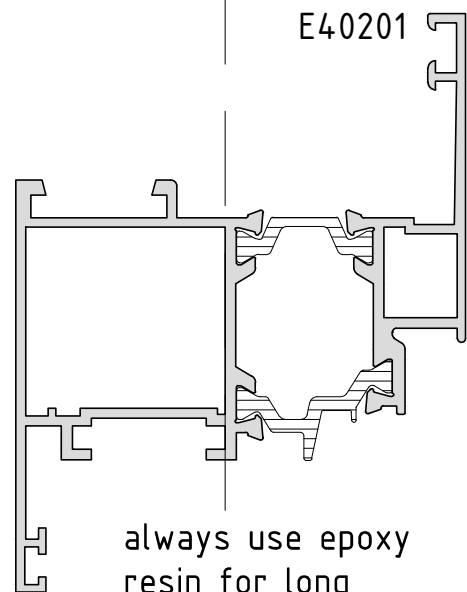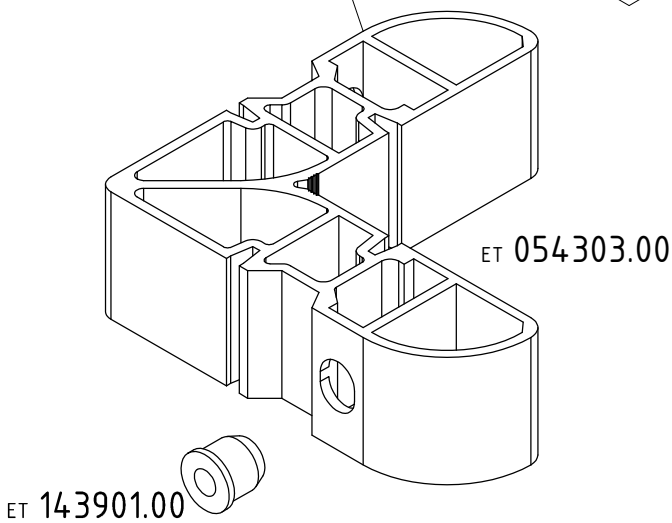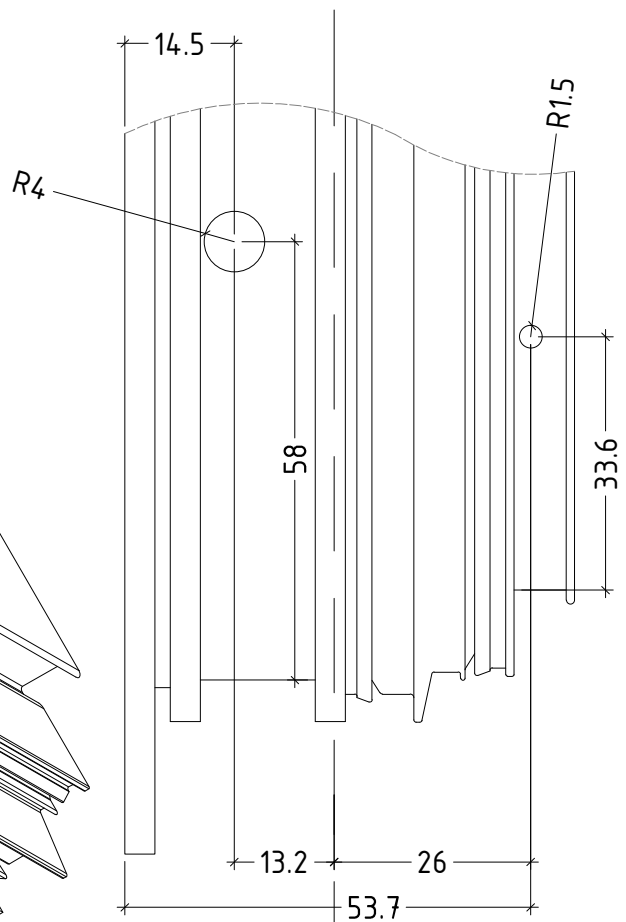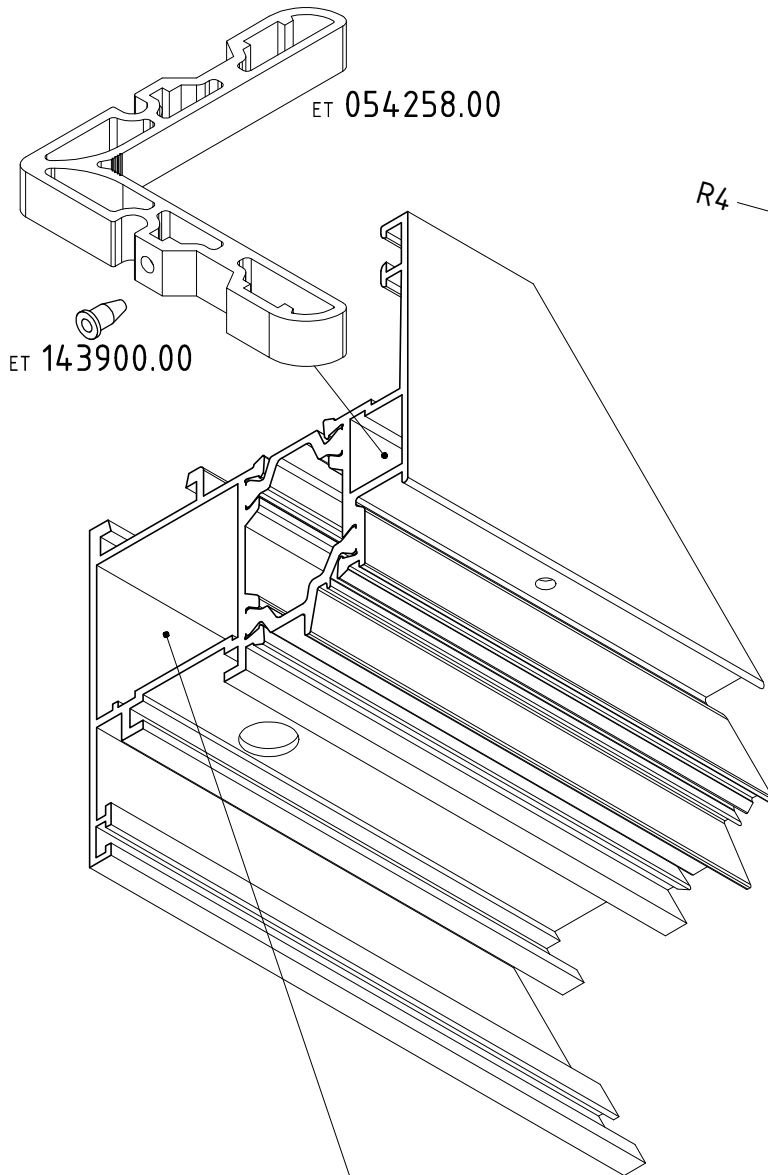

always use epoxy resin for long lasting joining

D40-07

machining to use roll pins extruded aluminum joint corner brackets

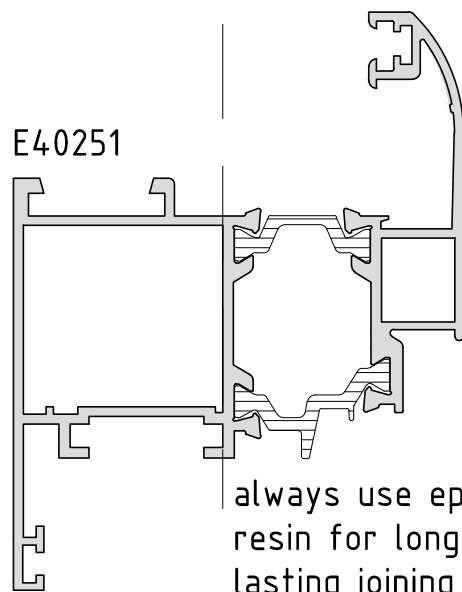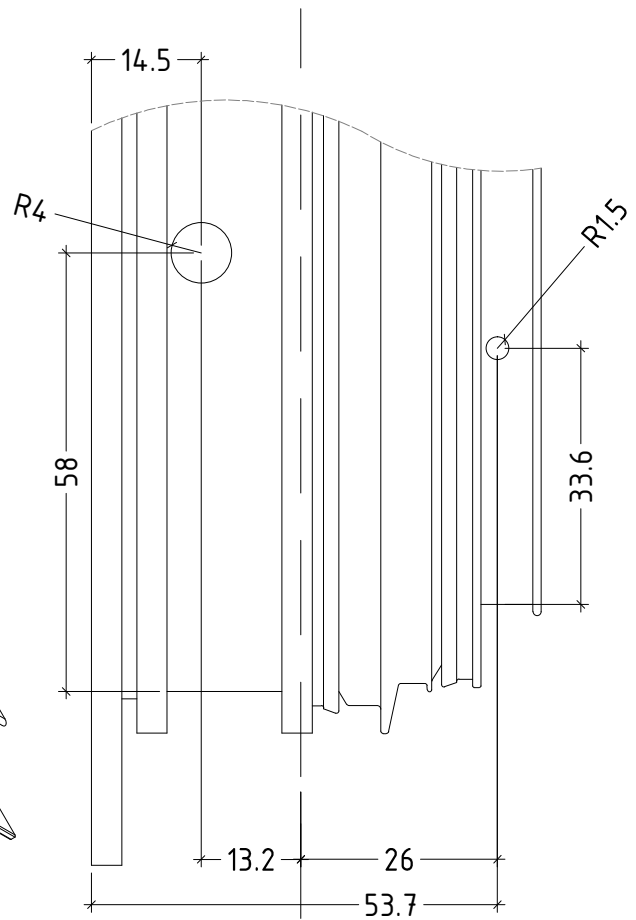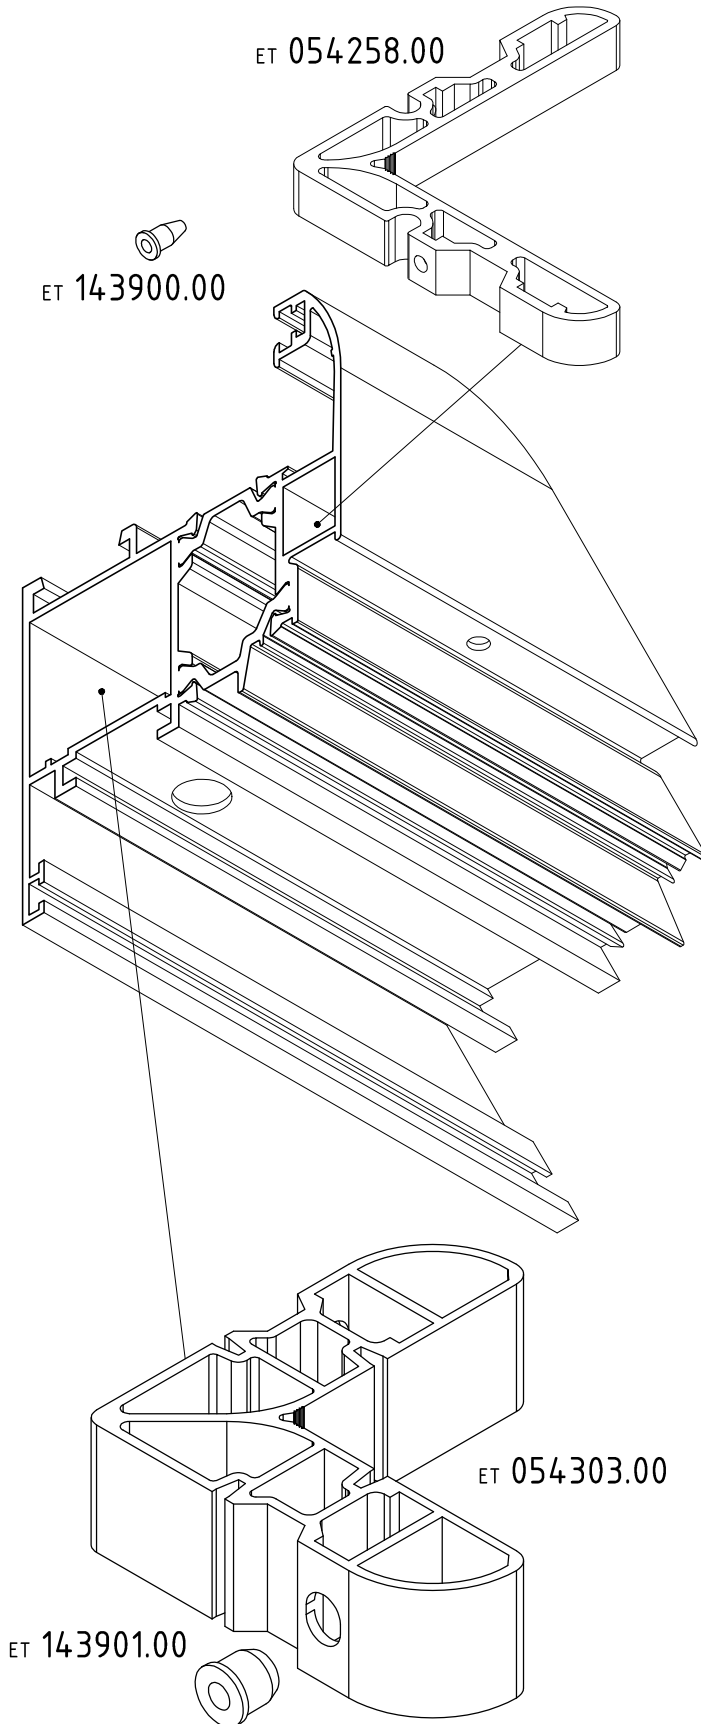


always use epoxy resin for long lasting joining

D40-08



corner bracket for variable angle for frame E40101

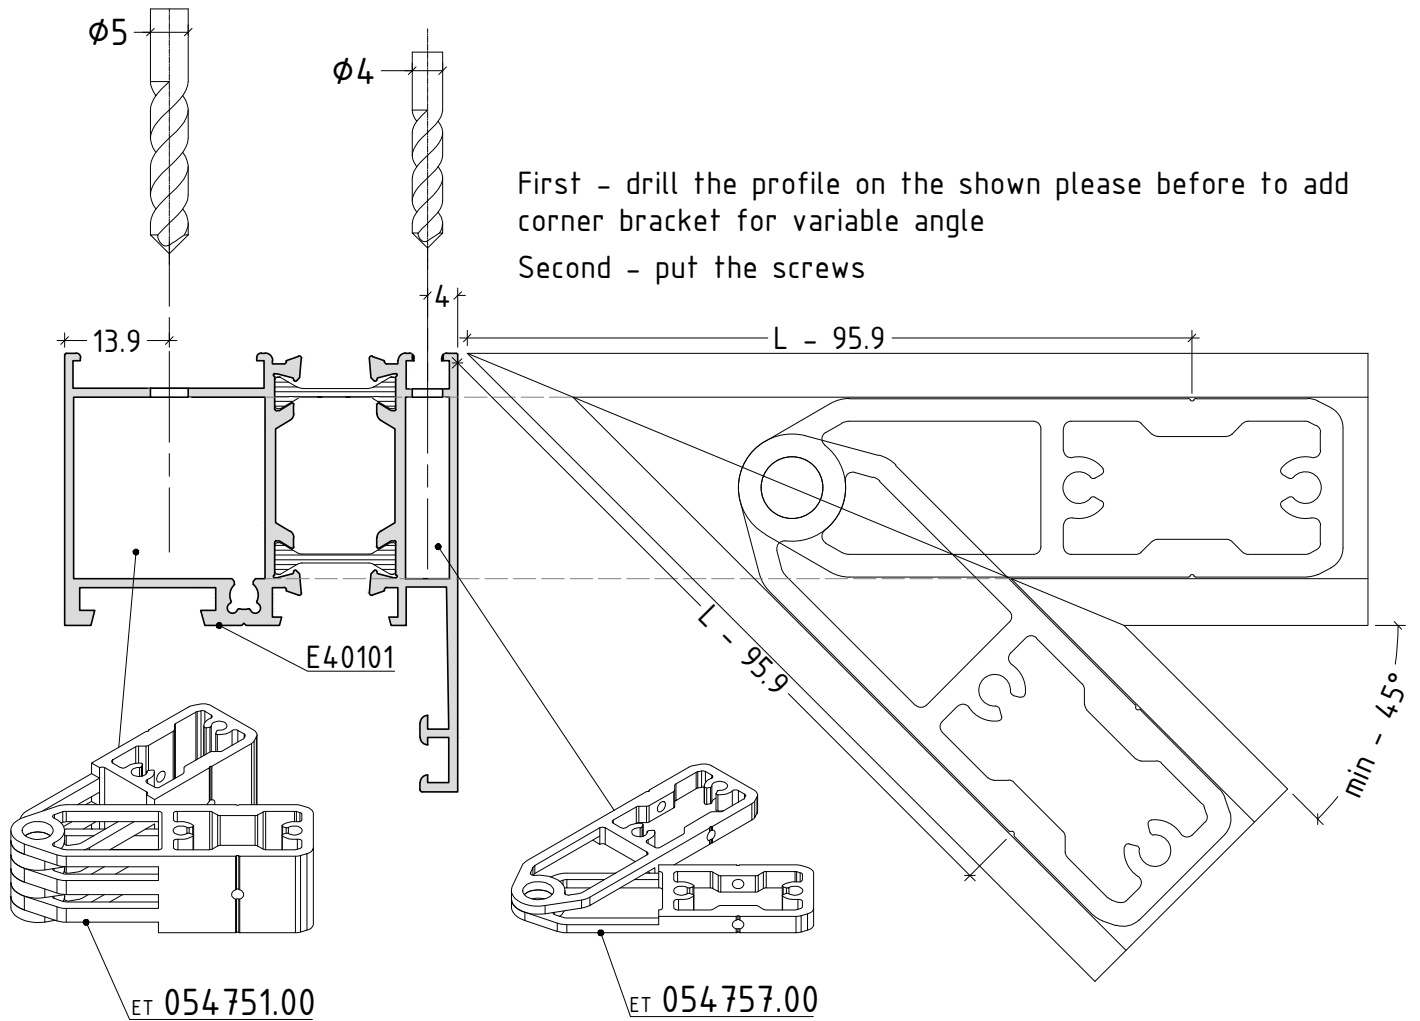

| for profiles: |        |              |        |              |        |              |        |              |        |
|---------------|--------|--------------|--------|--------------|--------|--------------|--------|--------------|--------|
| E 40101       |        |              |        |              |        |              |        |              |        |
| $\alpha$ (°)  | L (mm) | $\alpha$ (°) | L (mm) | $\alpha$ (°) | L (mm) | $\alpha$ (°) | L (mm) | $\alpha$ (°) | L (mm) |
| 45            | 95,9   | 74           | 76,5   | 103          | 67,1   | 132          | 60,8   | 161          | 55,9   |
| 46            | 94,8   | 75           | 76,1   | 104          | 66,8   | 133          | 60,6   | 162          | 55,7   |
| 47            | 93,8   | 76           | 75,7   | 105          | 66,6   | 134          | 60,5   | 163          | 55,6   |
| 48            | 92,9   | 77           | 75,3   | 106          | 66,3   | 135          | 60,3   | 164          | 55,4   |
| 49            | 92,0   | 78           | 74,9   | 107          | 66,1   | 136          | 60,1   | 165          | 55,2   |
| 50            | 91,1   | 79           | 74,5   | 108          | 65,8   | 137          | 59,9   | 166          | 55,1   |
| 51            | 90,2   | 80           | 74,1   | 109          | 65,6   | 138          | 59,7   | 167          | 54,9   |
| 52            | 89,4   | 81           | 73,7   | 110          | 65,4   | 139          | 59,6   | 168          | 54,8   |
| 53            | 88,6   | 82           | 73,4   | 111          | 65,1   | 140          | 59,4   | 169          | 54,6   |
| 54            | 87,8   | 83           | 73,0   | 112          | 64,9   | 141          | 59,2   | 170          | 54,5   |
| 55            | 87,1   | 84           | 72,7   | 113          | 64,7   | 142          | 59,0   | 171          | 54,3   |
| 56            | 86,4   | 85           | 72,3   | 114          | 64,5   | 143          | 58,9   | 172          | 54,1   |
| 57            | 85,7   | 86           | 72,0   | 115          | 64,2   | 144          | 58,7   | 173          | 54,0   |
| 58            | 85,0   | 87           | 71,7   | 116          | 64,0   | 145          | 58,5   | 174          | 53,8   |
| 59            | 84,4   | 88           | 71,3   | 117          | 63,8   | 146          | 58,3   | 175          | 53,7   |
| 60            | 83,7   | 89           | 71,0   | 118          | 63,6   | 147          | 58,2   | 176          | 53,5   |
| 61            | 83,1   | 90           | 70,7   | 119          | 63,4   | 148          | 58,0   | 177          | 53,4   |
| 62            | 82,5   | 91           | 70,4   | 120          | 63,2   | 149          | 57,8   | 178          | 53,2   |
| 63            | 81,9   | 92           | 70,1   | 121          | 63,0   | 150          | 57,7   | 179          | 53,1   |
| 64            | 81,4   | 93           | 69,8   | 122          | 62,8   | 151          | 57,5   | 180          | 52,9   |
| 65            | 80,8   | 94           | 69,5   | 123          | 62,6   | 152          | 57,3   |              |        |
| 66            | 80,3   | 95           | 69,2   | 124          | 62,4   | 153          | 57,2   |              |        |
| 67            | 79,8   | 96           | 68,9   | 125          | 62,2   | 154          | 57,0   |              |        |
| 68            | 79,3   | 97           | 68,6   | 126          | 62,0   | 155          | 56,8   |              |        |
| 69            | 78,8   | 98           | 68,4   | 127          | 61,8   | 156          | 56,7   |              |        |
| 70            | 78,3   | 99           | 68,1   | 128          | 61,6   | 157          | 56,5   |              |        |
| 71            | 77,9   | 100          | 67,8   | 129          | 61,4   | 158          | 56,4   |              |        |
| 72            | 77,4   | 101          | 67,6   | 130          | 61,2   | 159          | 56,2   |              |        |
| 73            | 77,0   | 102          | 67,3   | 131          | 61,0   | 160          | 56,0   |              |        |

attention  
always use epoxy  
resin for long  
lasting joining


Note:

The tables concern only the profiles shown here.

For other profiles the tables are different.

In case you are using other corner bracket for variable angle for other profiles, please contact ETEM R&D department for additional information.

corner bracket for variable angle for sash E40201

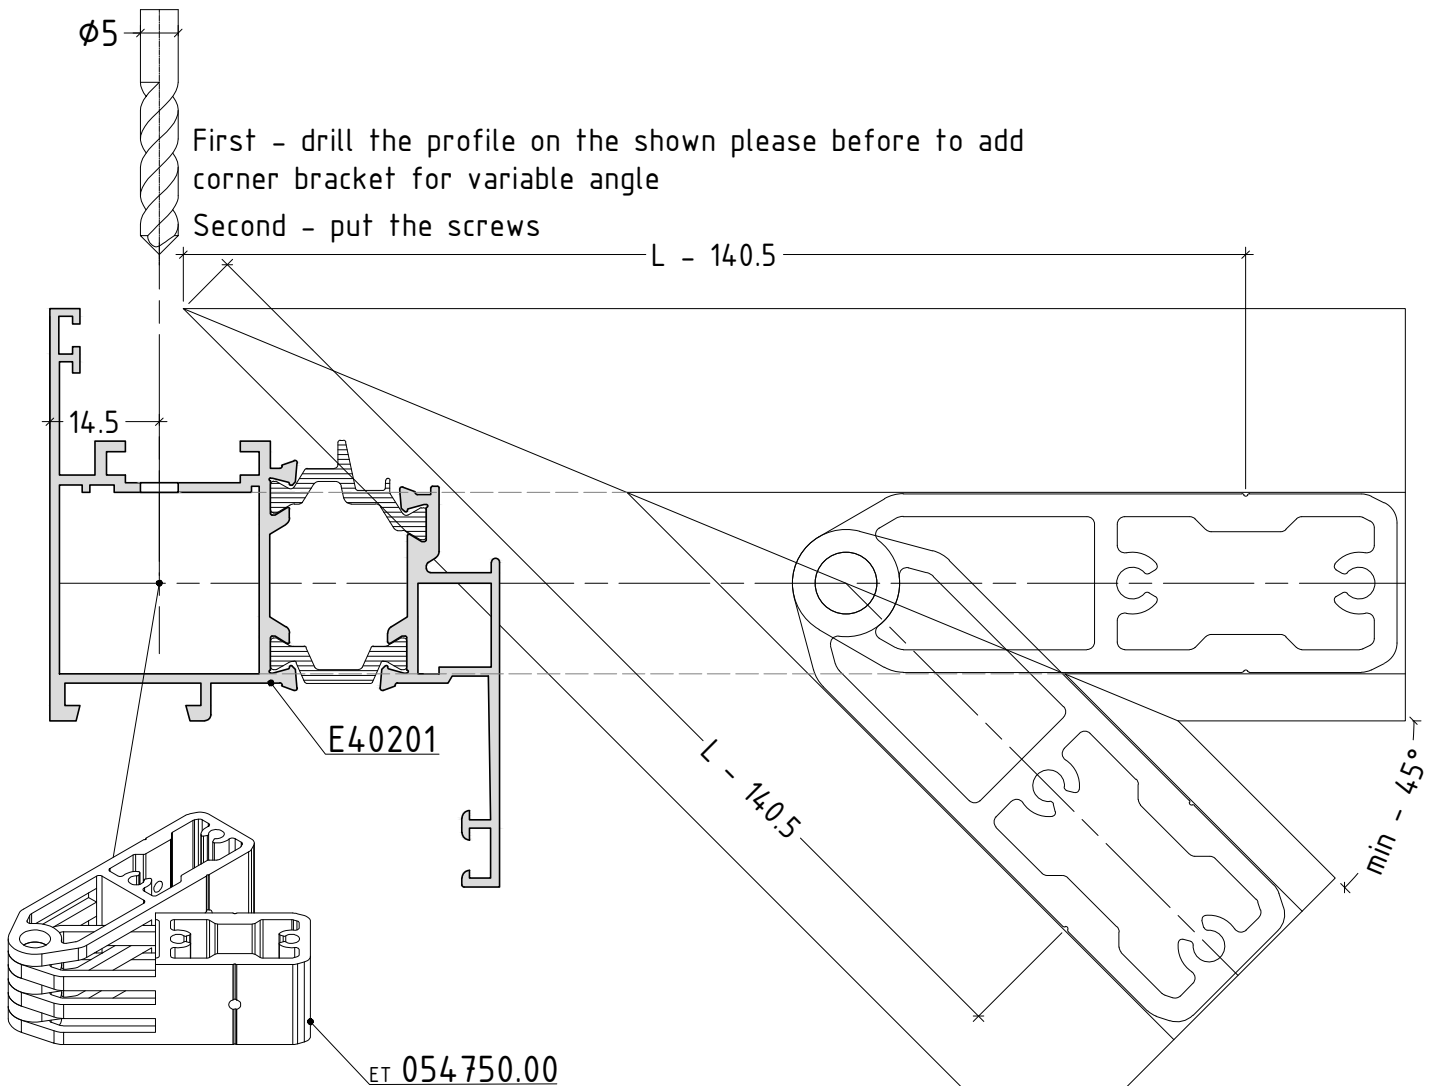

| for profiles: |        |              |        |              |        |              |        |              |        |
|---------------|--------|--------------|--------|--------------|--------|--------------|--------|--------------|--------|
| E40201        |        |              |        |              |        |              |        |              |        |
| $\alpha$ (°)  | L (mm) | $\alpha$ (°) | L (mm) | $\alpha$ (°) | L (mm) | $\alpha$ (°) | L (mm) | $\alpha$ (°) | L (mm) |
| 45            | 140.5  | 74           | 101.1  | 103          | 81.8   | 132          | 69.1   | 161          | 59.0   |
| 46            | 138.4  | 75           | 100.2  | 104          | 81.3   | 133          | 68.7   | 162          | 58.6   |
| 47            | 136.4  | 76           | 99.4   | 105          | 80.8   | 134          | 68.3   | 163          | 58.3   |
| 48            | 134.4  | 77           | 98.5   | 106          | 80.3   | 135          | 67.9   | 164          | 58.0   |
| 49            | 132.6  | 78           | 97.7   | 107          | 79.8   | 136          | 67.6   | 165          | 57.7   |
| 50            | 130.7  | 79           | 96.9   | 108          | 79.3   | 137          | 67.2   | 166          | 57.4   |
| 51            | 129.0  | 80           | 96.2   | 109          | 78.8   | 138          | 66.8   | 167          | 57.0   |
| 52            | 127.3  | 81           | 95.4   | 110          | 78.3   | 139          | 66.5   | 168          | 56.7   |
| 53            | 125.7  | 82           | 94.7   | 111          | 77.8   | 140          | 66.1   | 169          | 56.4   |
| 54            | 124.1  | 83           | 93.9   | 112          | 77.4   | 141          | 65.8   | 170          | 56.1   |
| 55            | 122.6  | 84           | 93.2   | 113          | 76.9   | 142          | 65.4   | 171          | 55.8   |
| 56            | 121.2  | 85           | 92.5   | 114          | 76.5   | 143          | 65.0   | 172          | 55.4   |
| 57            | 119.8  | 86           | 91.8   | 115          | 76.0   | 144          | 64.7   | 173          | 55.1   |
| 58            | 118.4  | 87           | 91.2   | 116          | 75.6   | 145          | 64.3   | 174          | 54.8   |
| 59            | 117.1  | 88           | 90.5   | 117          | 75.1   | 146          | 64.0   | 175          | 54.5   |
| 60            | 115.8  | 89           | 89.8   | 118          | 74.7   | 147          | 63.7   | 176          | 54.2   |
| 61            | 114.5  | 90           | 89.2   | 119          | 74.3   | 148          | 63.3   | 177          | 53.9   |
| 62            | 113.3  | 91           | 88.6   | 120          | 73.9   | 149          | 63.0   | 178          | 53.5   |
| 63            | 112.1  | 92           | 88.0   | 121          | 73.4   | 150          | 62.6   | 179          | 53.2   |
| 64            | 111.0  | 93           | 87.3   | 122          | 73.0   | 151          | 62.3   | 180          | 52.9   |
| 65            | 109.9  | 94           | 86.8   | 123          | 72.6   | 152          | 62.0   |              |        |
| 66            | 108.8  | 95           | 86.2   | 124          | 72.2   | 153          | 61.6   |              |        |
| 67            | 107.7  | 96           | 85.6   | 125          | 71.8   | 154          | 61.3   |              |        |
| 68            | 106.7  | 97           | 85.0   | 126          | 71.4   | 155          | 60.9   |              |        |
| 69            | 105.7  | 98           | 84.5   | 127          | 71.0   | 156          | 60.6   |              |        |
| 70            | 104.7  | 99           | 83.9   | 128          | 70.6   | 157          | 60.3   |              |        |
| 71            | 103.8  | 100          | 83.4   | 129          | 70.2   | 158          | 60.0   |              |        |
| 72            | 102.9  | 101          | 82.8   | 130          | 69.8   | 159          | 59.6   |              |        |
| 73            | 102.0  | 102          | 82.3   | 131          | 69.4   | 160          | 59.3   |              |        |

attention  
always use epoxy  
resin for long  
lasting joining


Note:

The tables concern only the profiles shown here.




For other profiles the tables are different.

In case you are using other corner bracket for variable angle for other profiles, please contact ETEM R&D department for additional information.


machining to use T-bracket - T-bracket for mullions/transoms

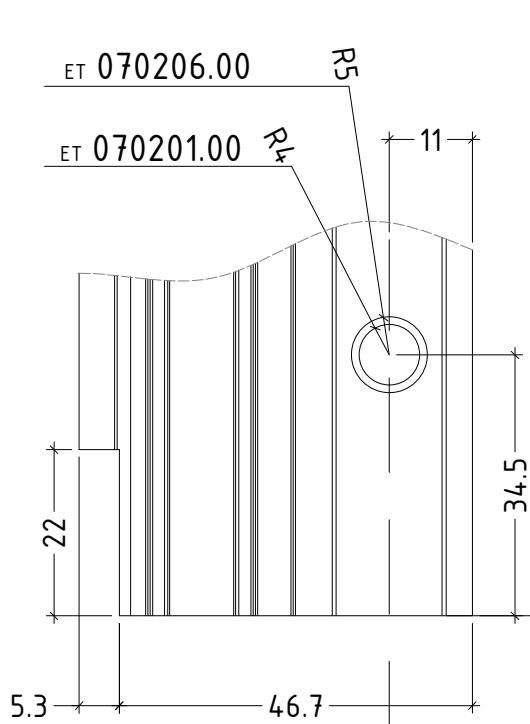


ET 070201.00

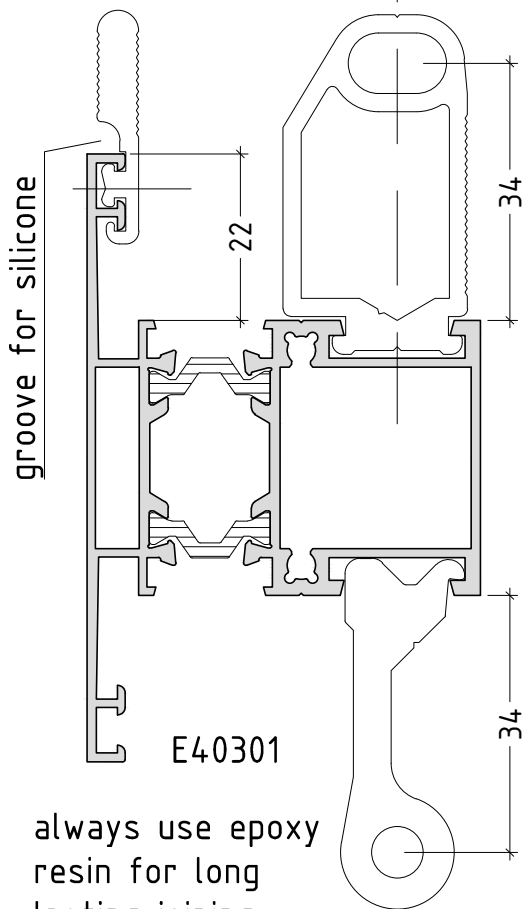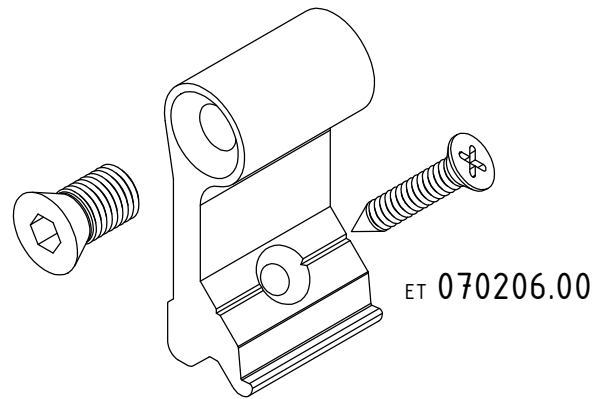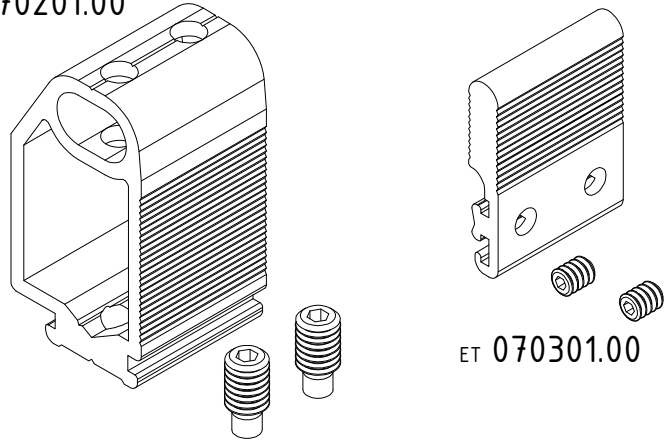





always use epoxy resin for long lasting joining

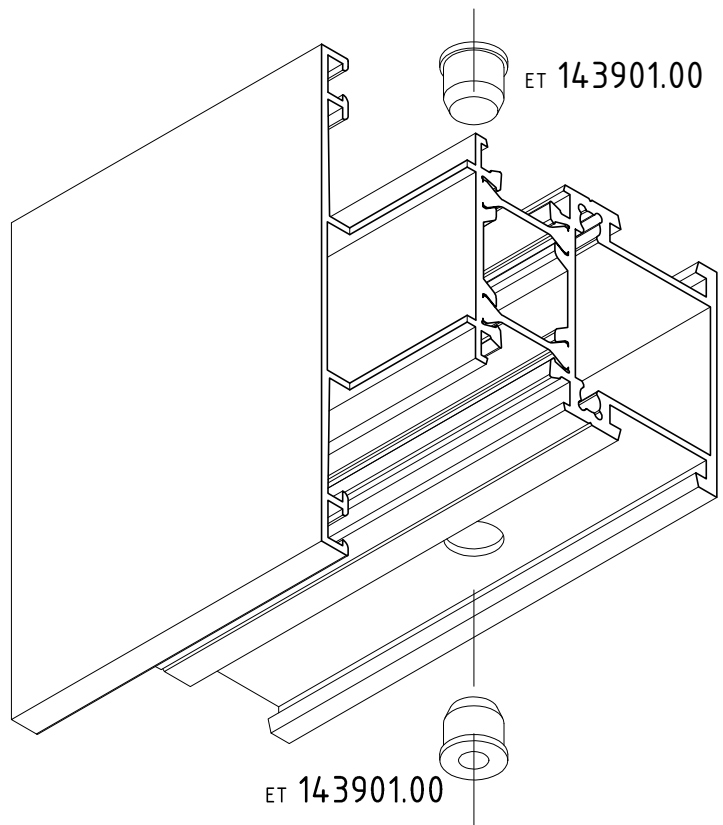


machining to use T-bracket - T-bracket for mullions/transoms

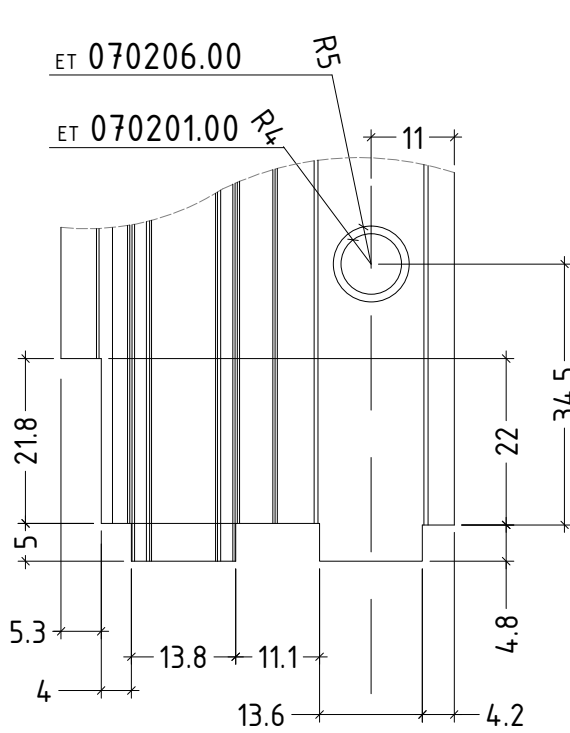

ET 070201.00

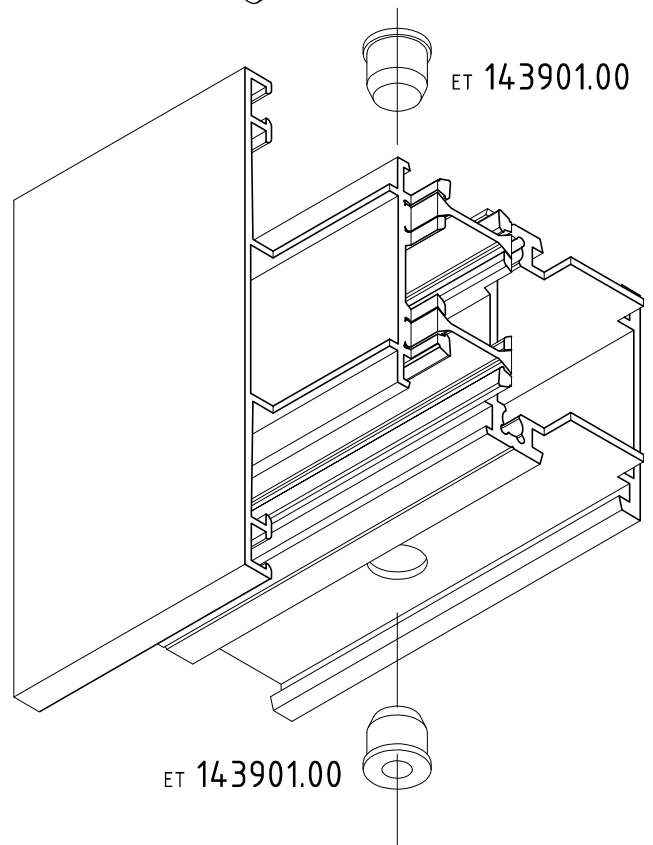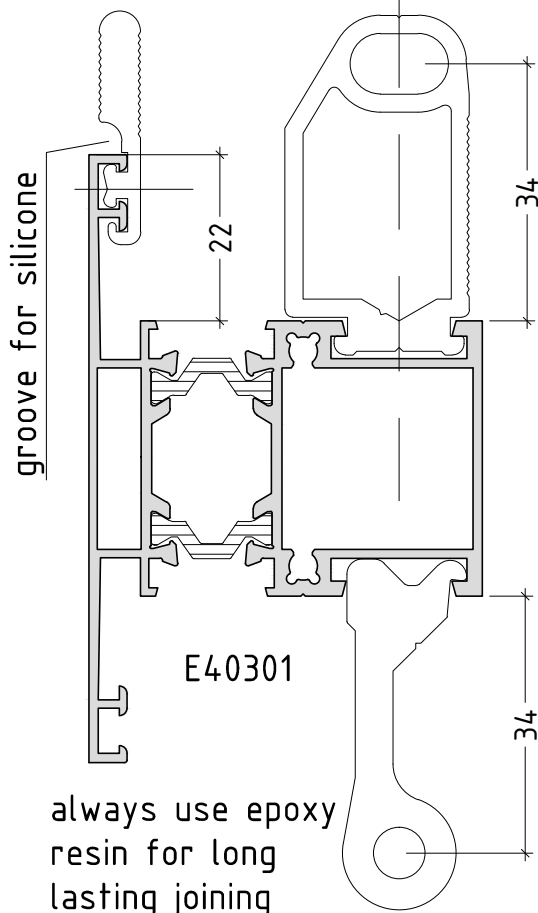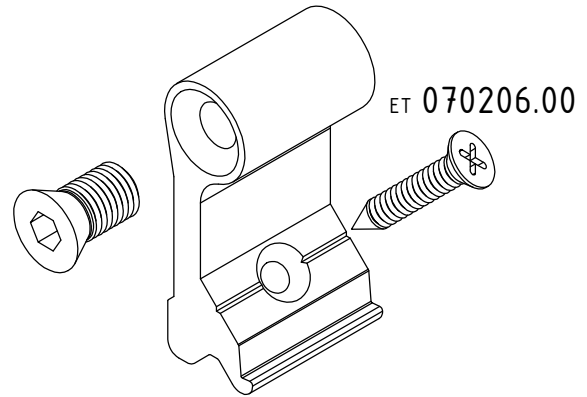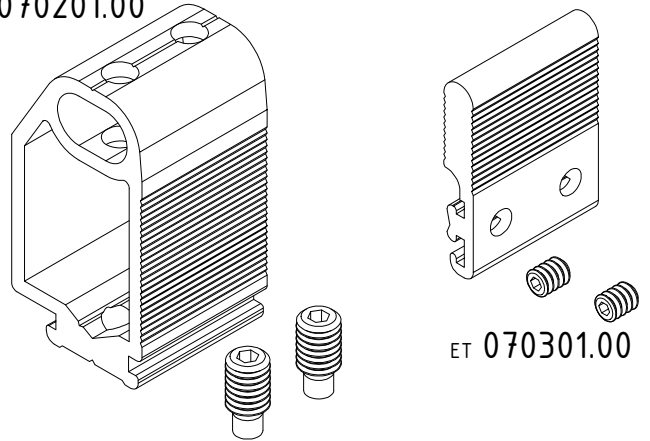


machining to use E45302 with E45100,1,2

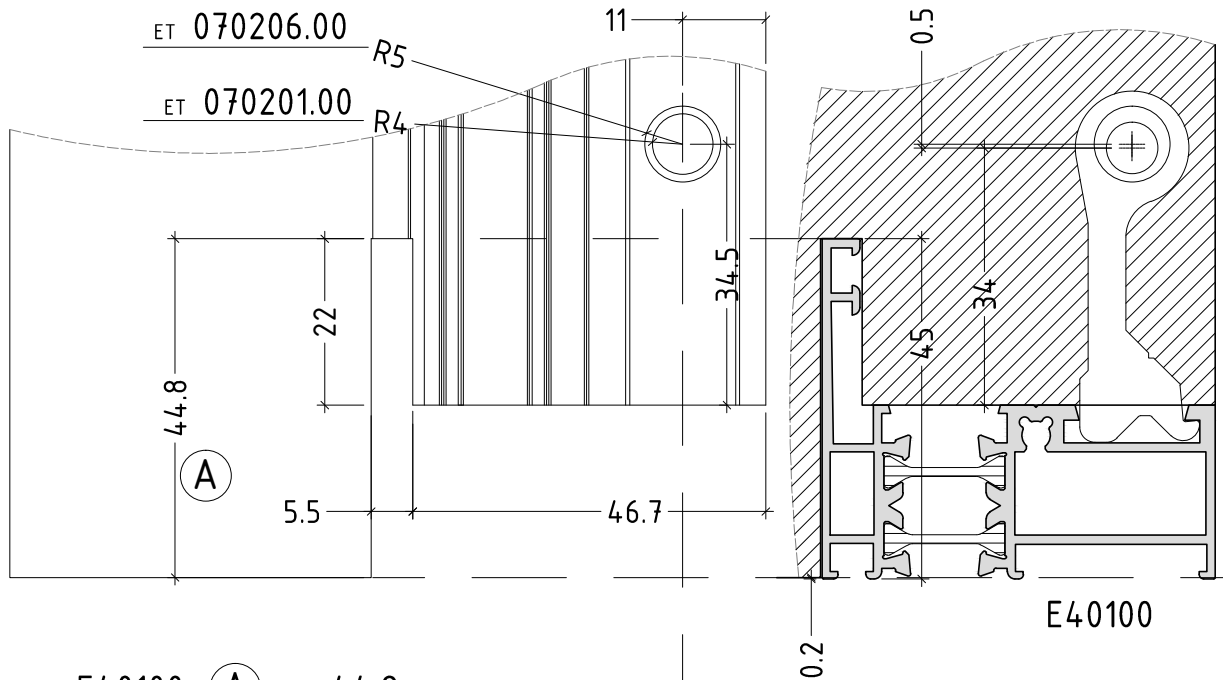


E40100 (A) = 44.8

E40101 (A) = 57.8

E40102 (A) = 65.8

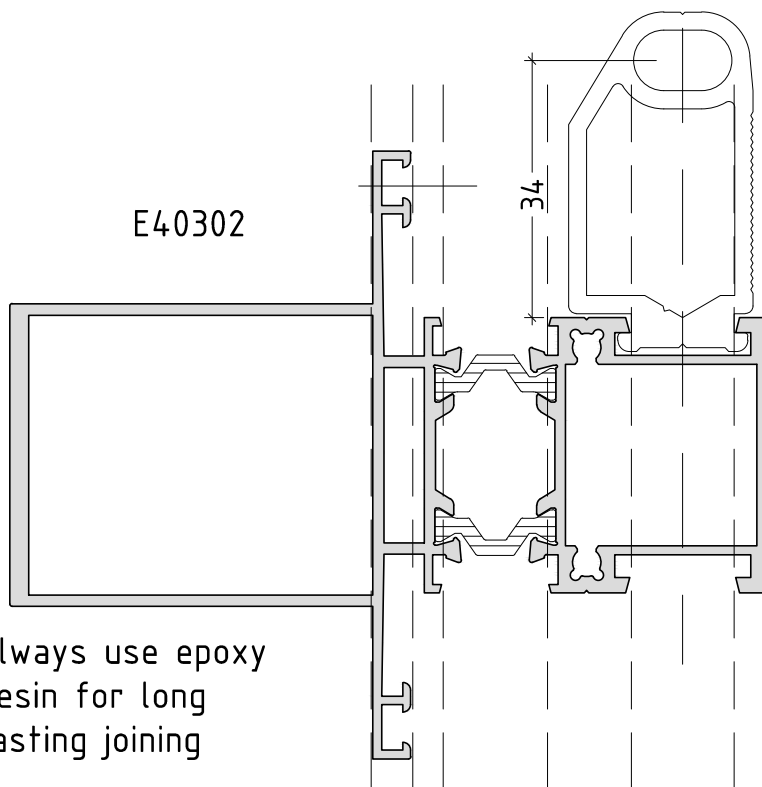


always use epoxy resin for long lasting joining


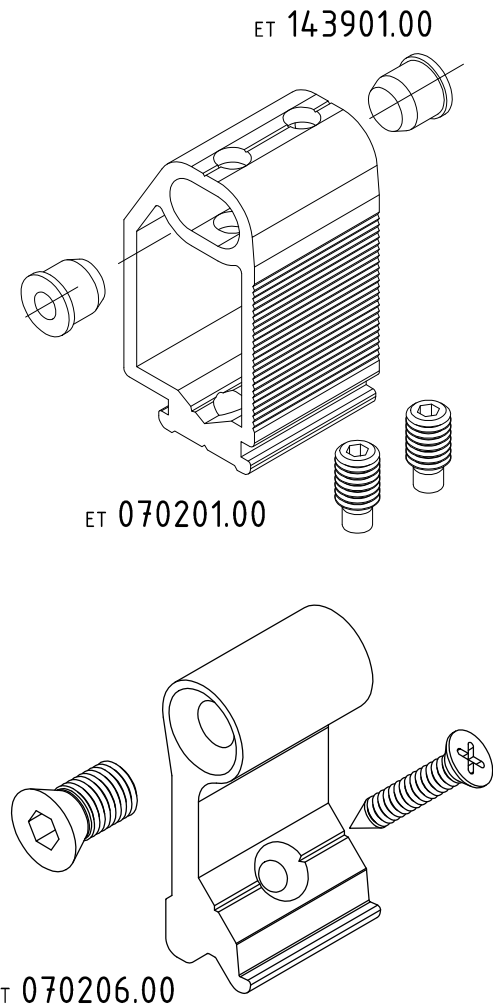


ET 070206.00

machining to use E45302 with E45100,1,2

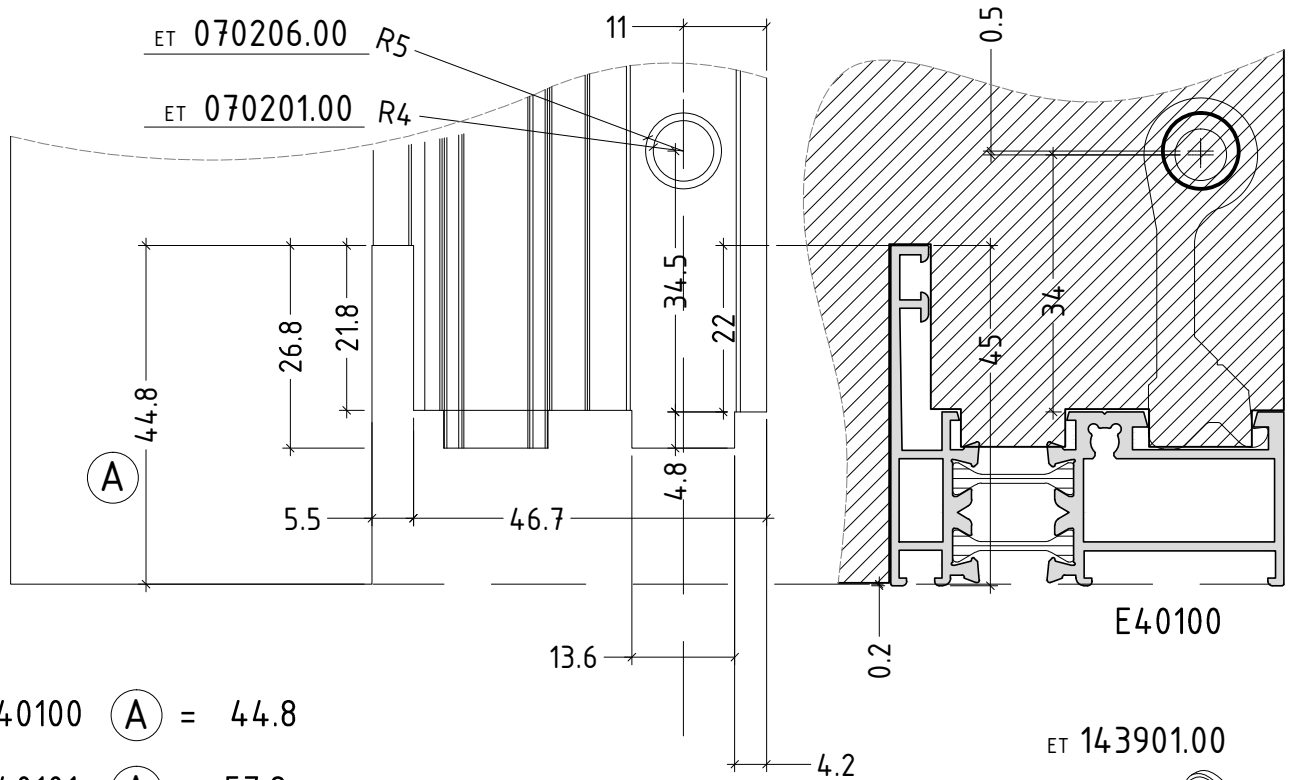

- E40100 (A) = 44.8
- E40101 (A) = 57.8
- E40102 (A) = 65.8

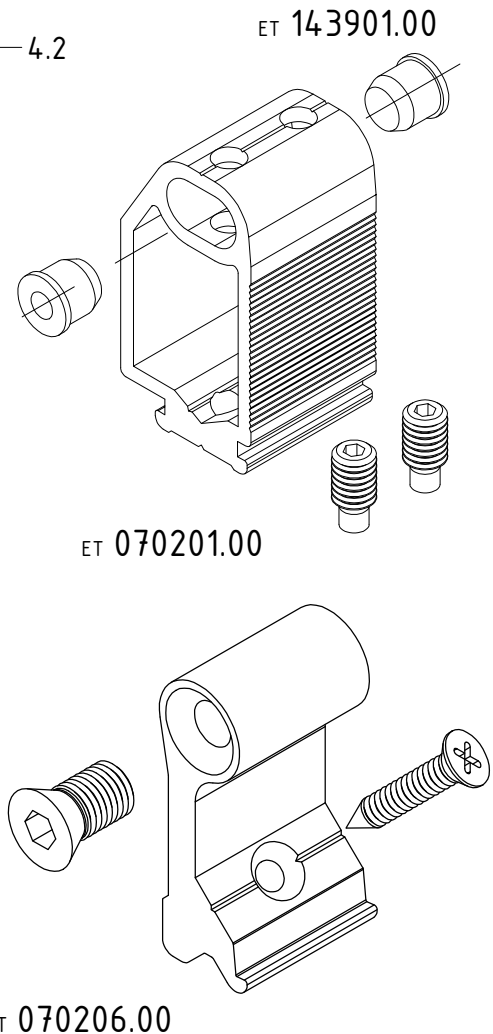
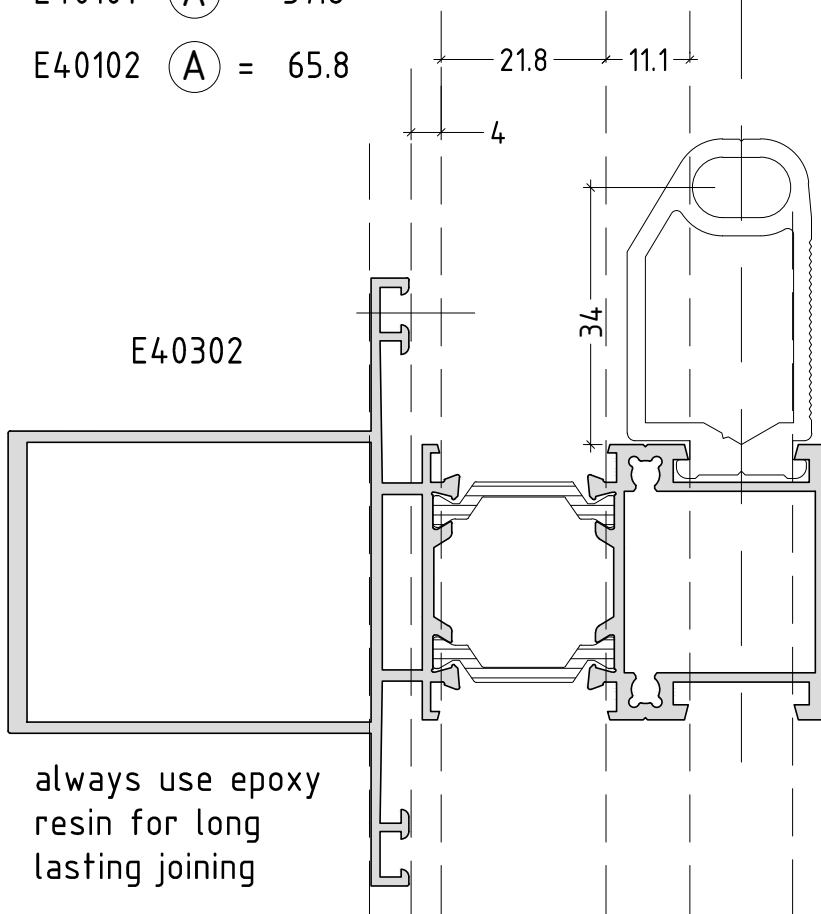


ET 070206.00

D40-14





machining for drainage and plastic cap - ET 074206.00


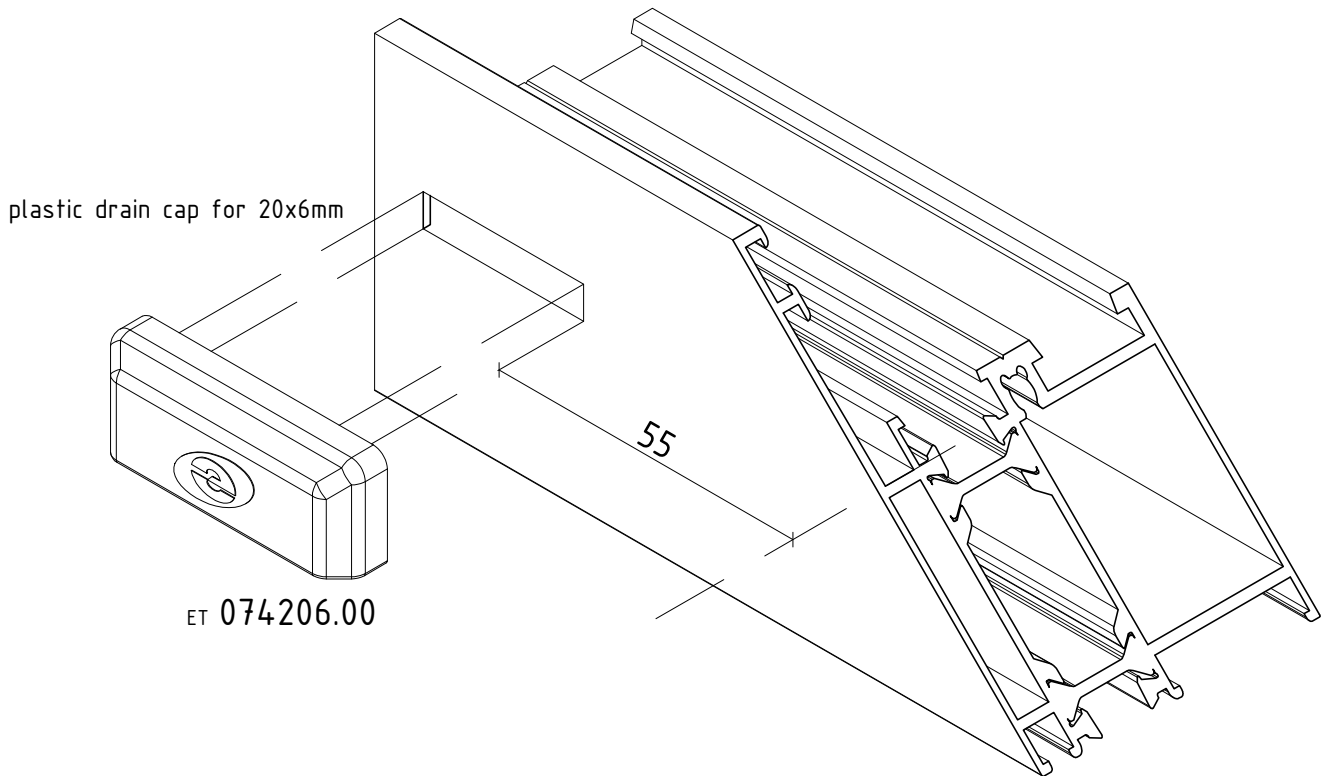
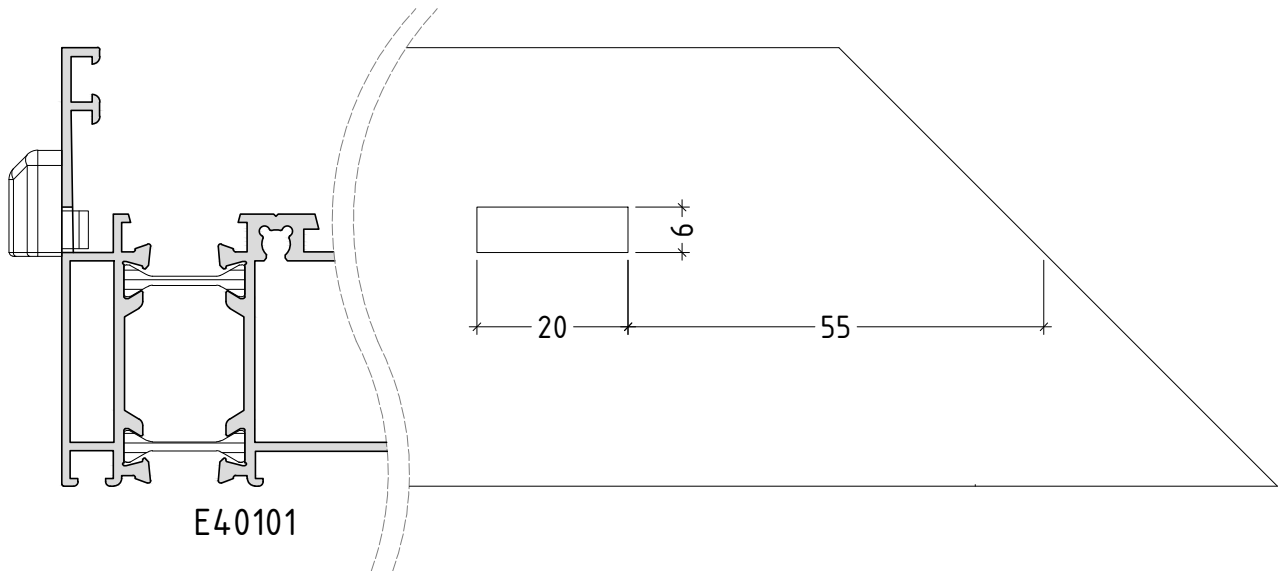




machining for drainage and plastic cap - ET 074605.00

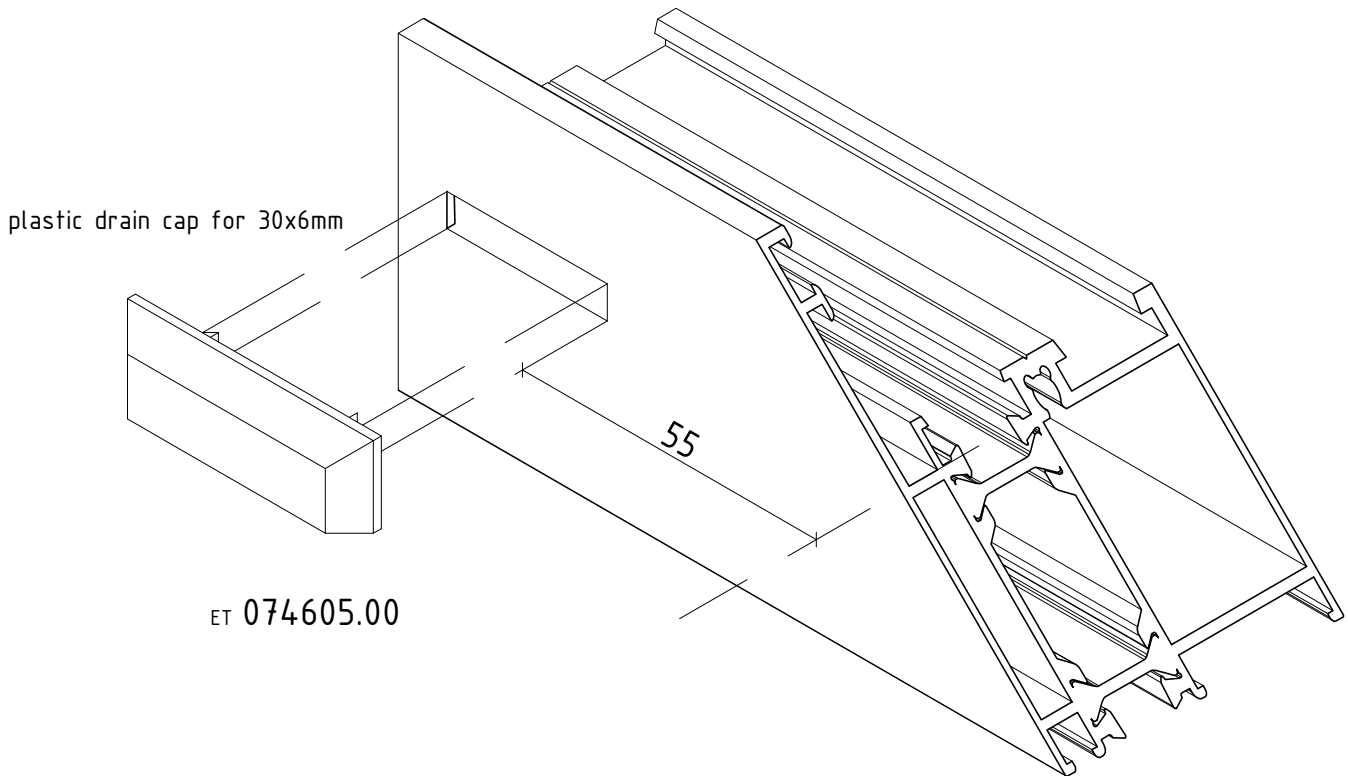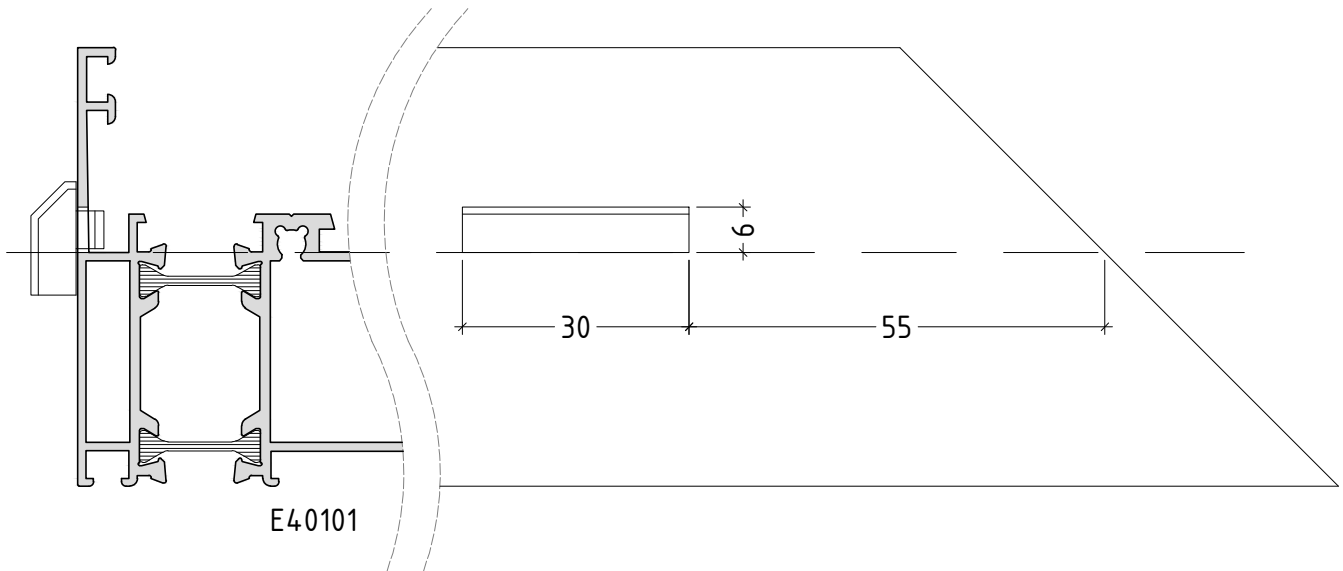


machining for connecting rod

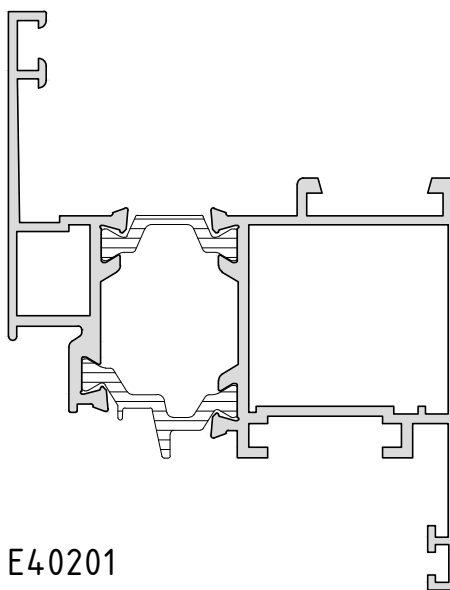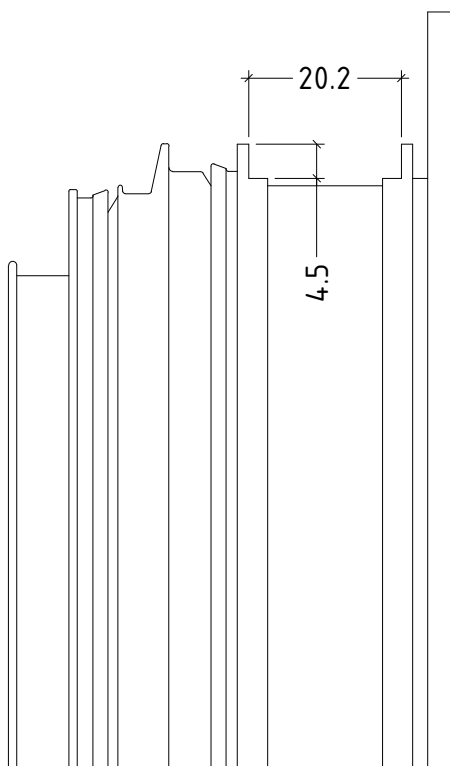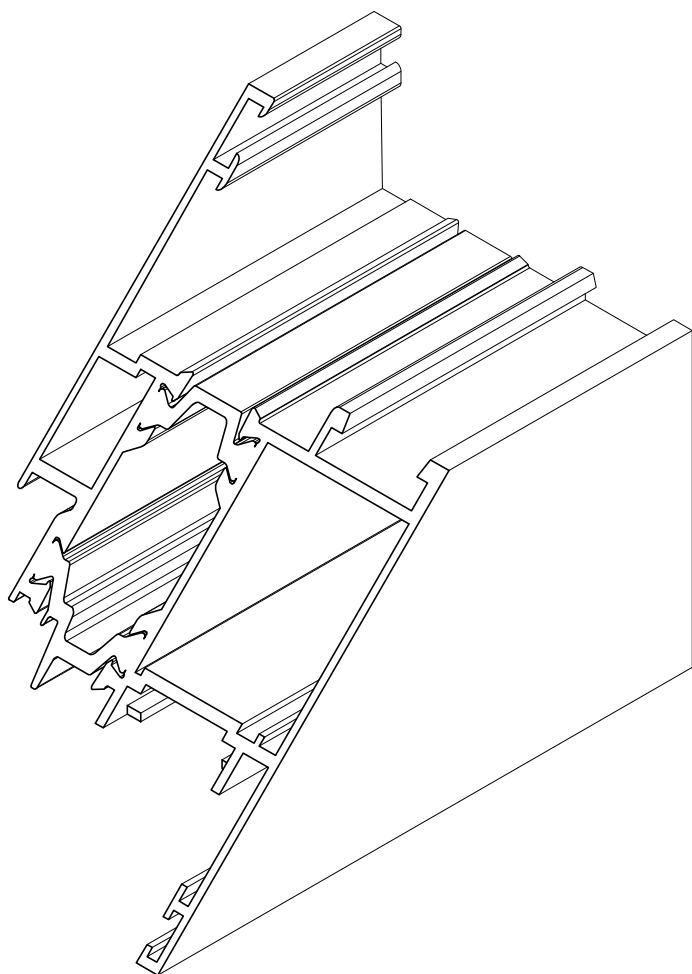


E40201

machining for connecting rod

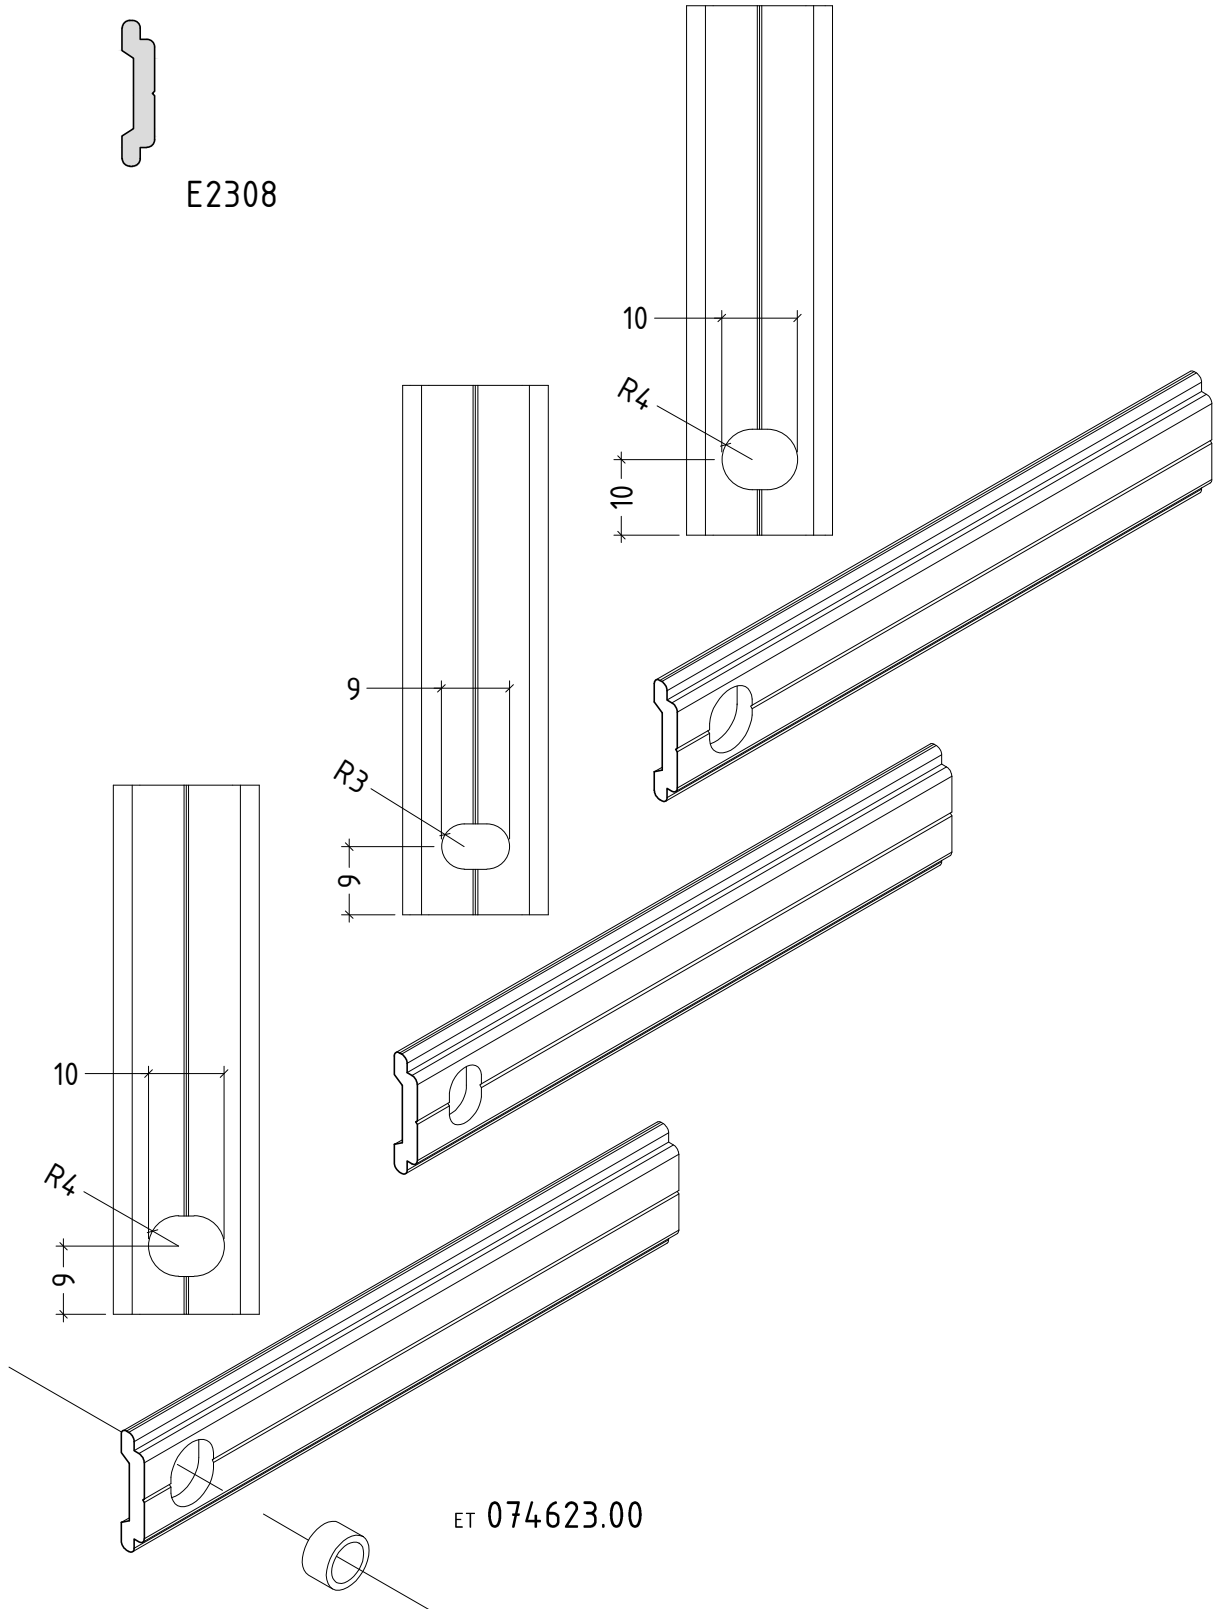


machining for drainage on sash and gasket

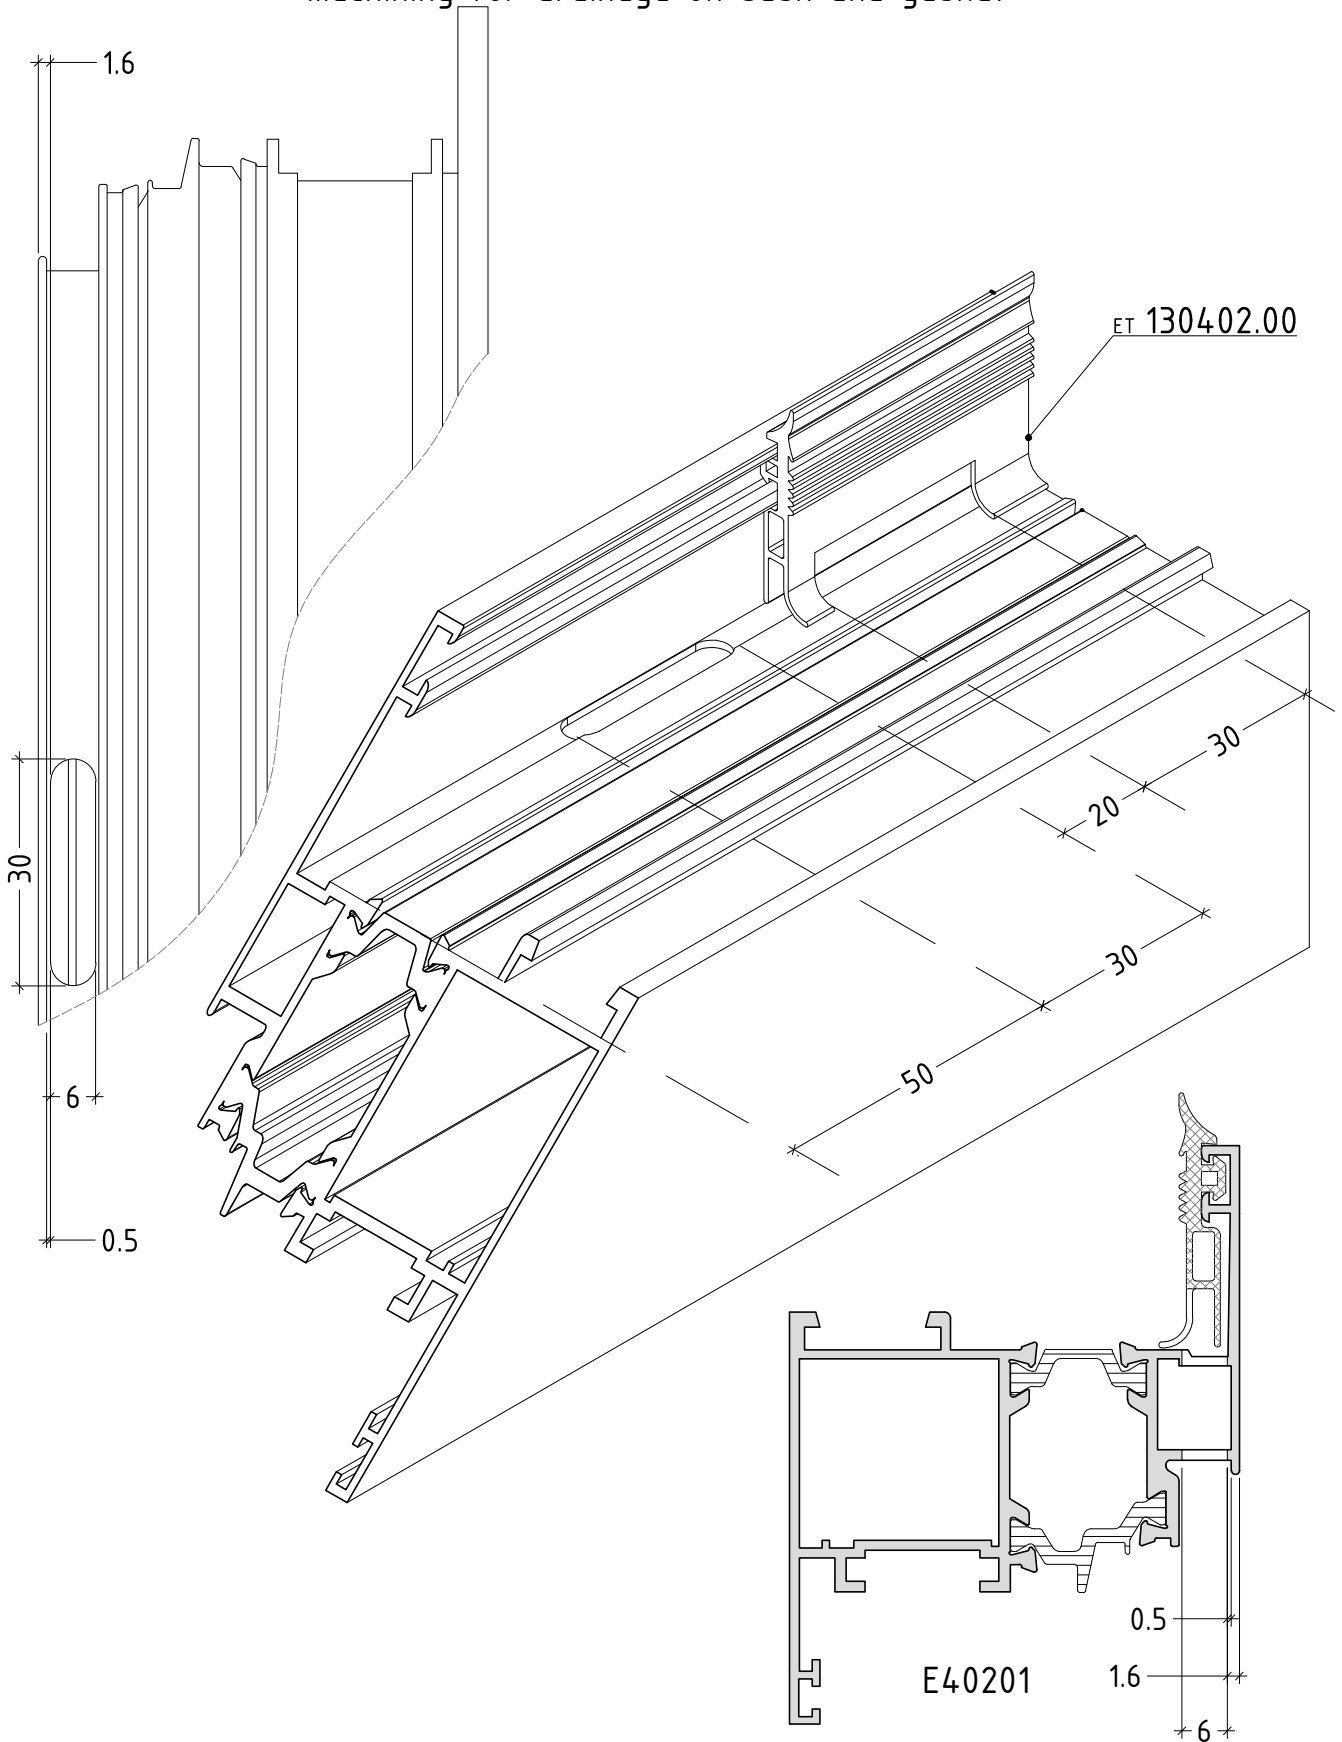


D40-20

machining for drainage on sash and gasket

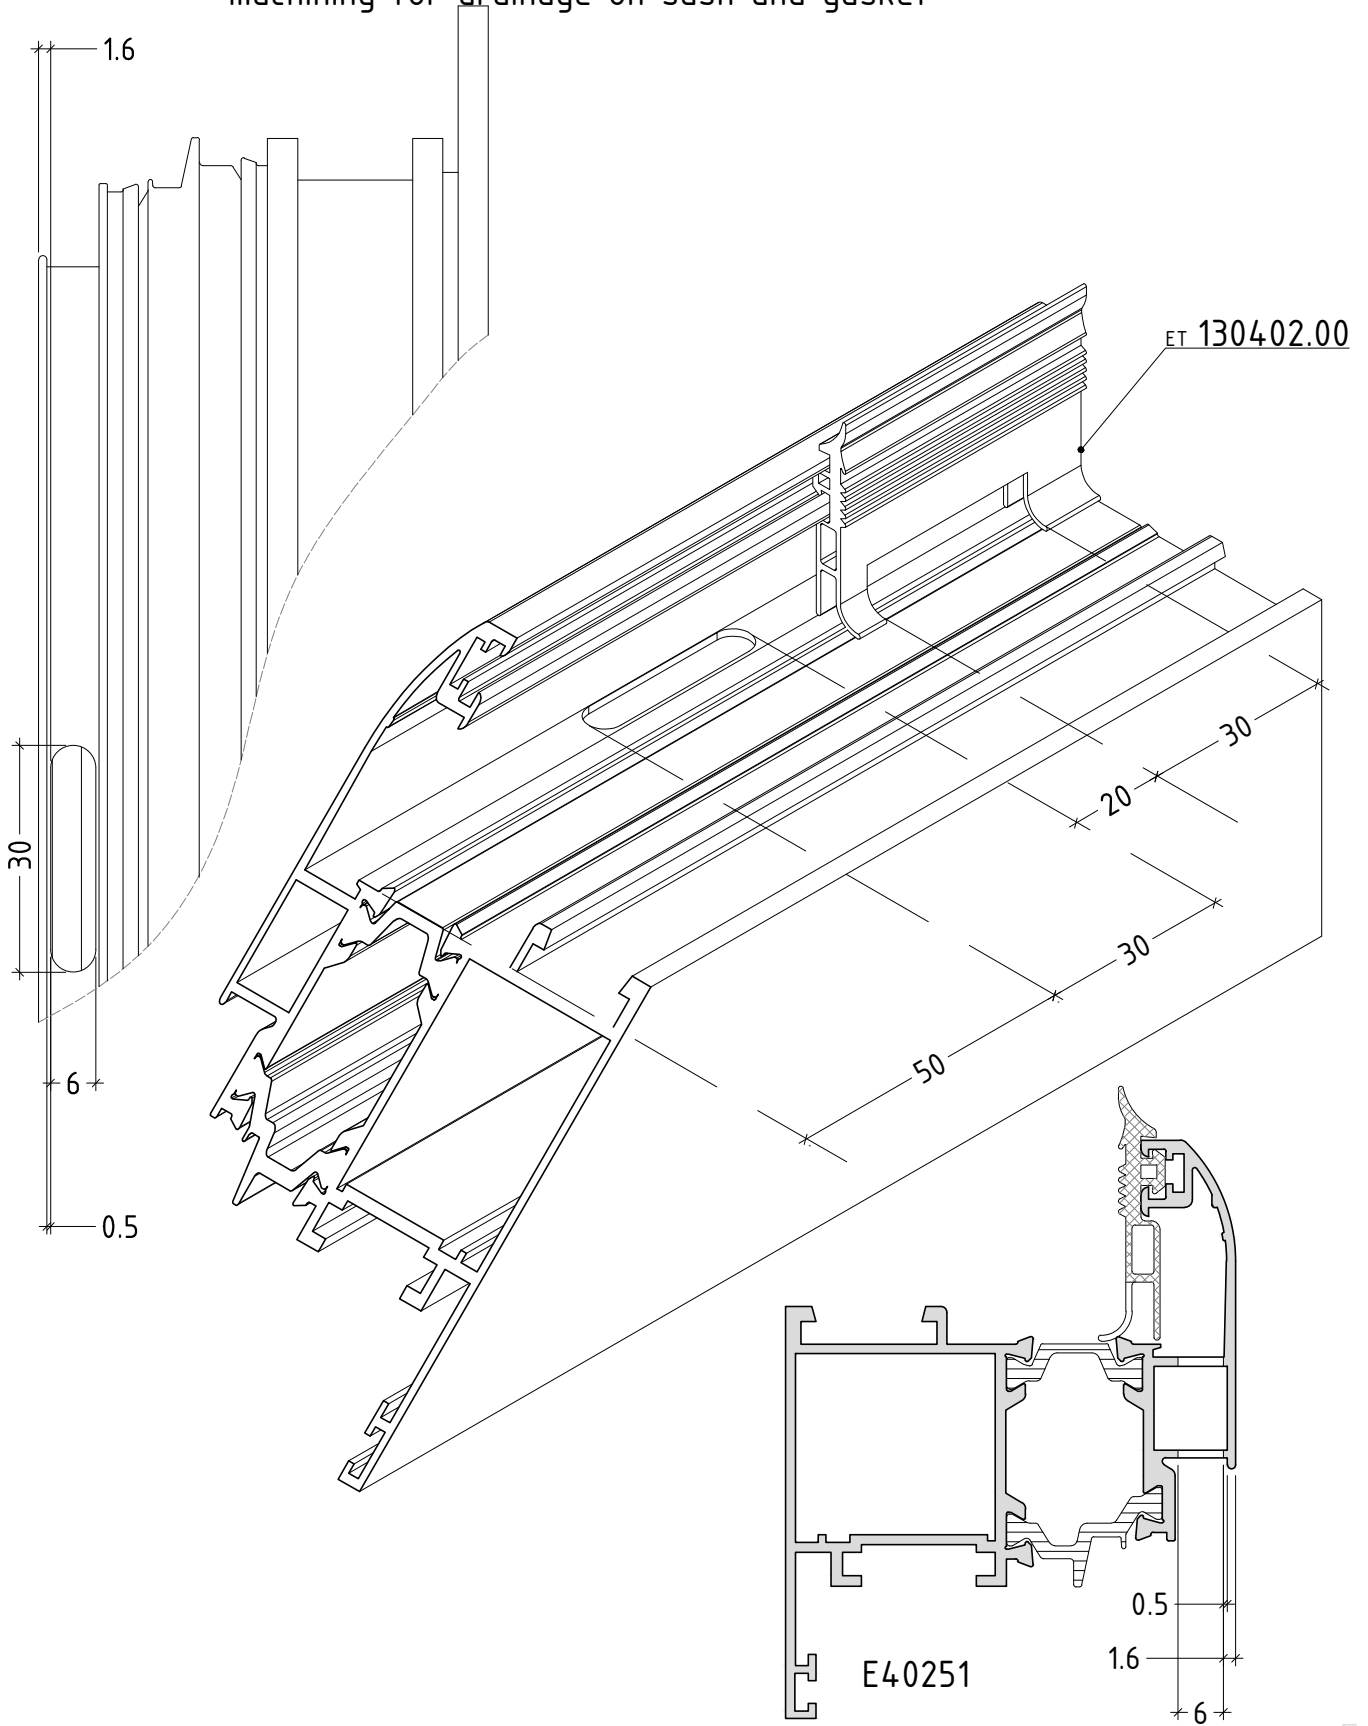


D40-21

sections and processing

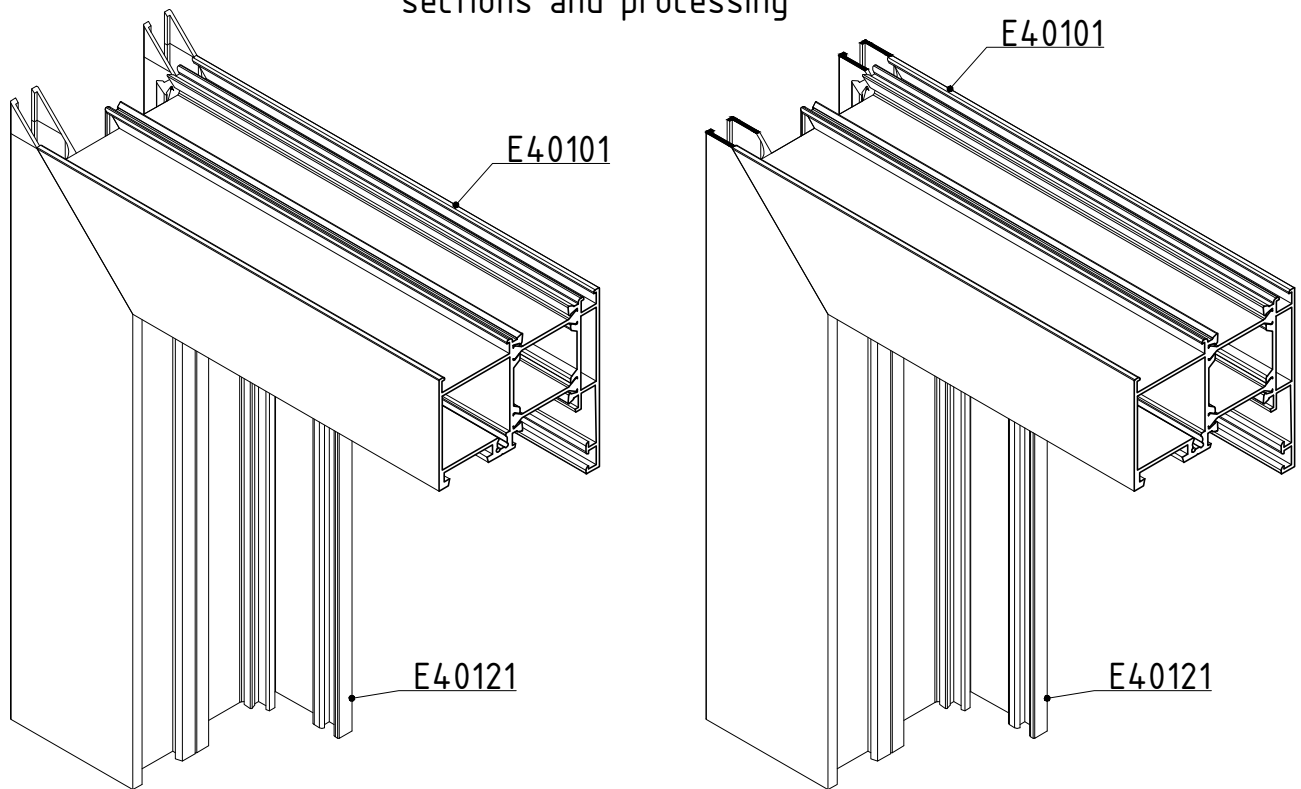


The frame for dilatation gap E40121 is joined with E40101 accordingly, using crimping machine ONLY!

After final assembly, the profile for dilatation gap E45121 is cut in the same plane of the standard frame E40101.

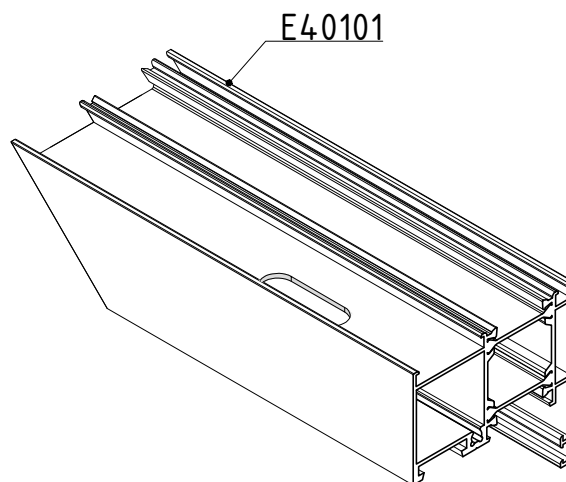

Oval shape of mounting openings are a must and have to be cut in the standard frame E40101, in order to take-in effectively the temperature expansion of the profiles in case of striped windows.


machining for handle GI212701.01 - GI212701.02

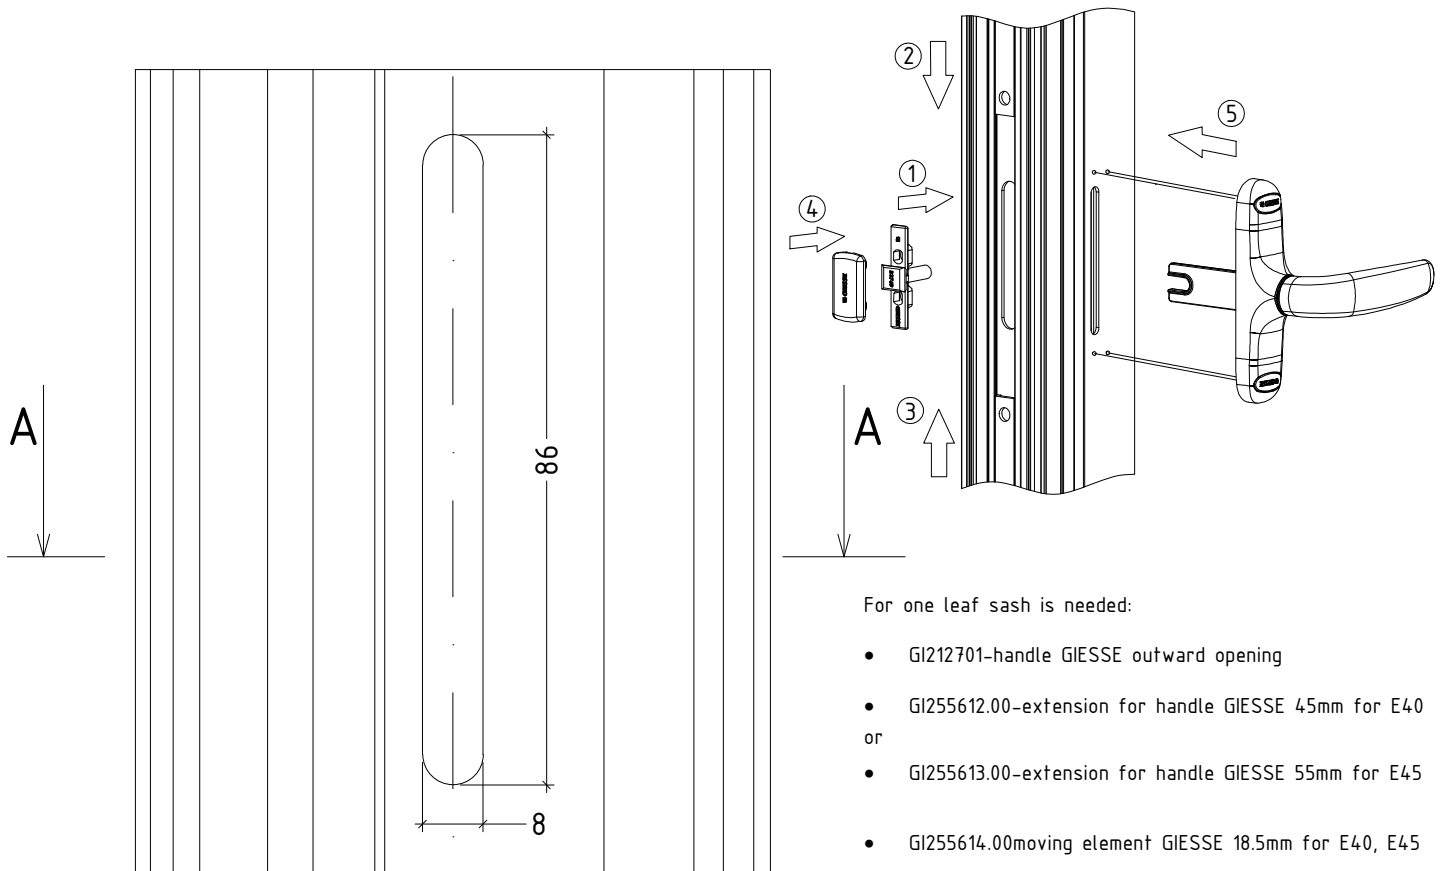

For one leaf sash is needed:

- GI212701-handle GIESSE outward opening
- GI255612.00-extension for handle GIESSE 45mm for E40 or
- GI255613.00-extension for handle GIESSE 55mm for E45
- GI255614.00moving element GIESSE 18.5mm for E40, E45



A - A

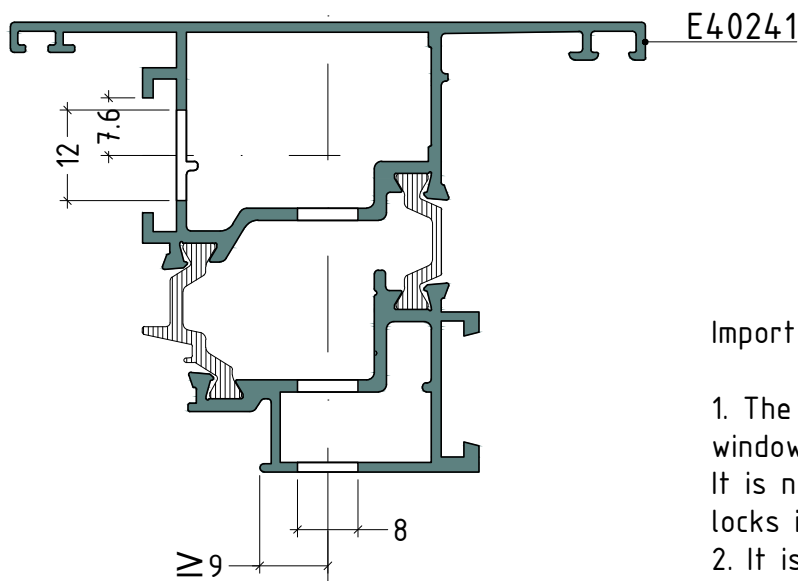

Important information:



1. The new sash allows execution of windows and door-height windows only. It is not possible to incorporate door locks in sash E40241
2. It is possible to use every kind of hinges, which are suitable for Euro-groove.

machining for handle GI212701.01 - GI212701.02

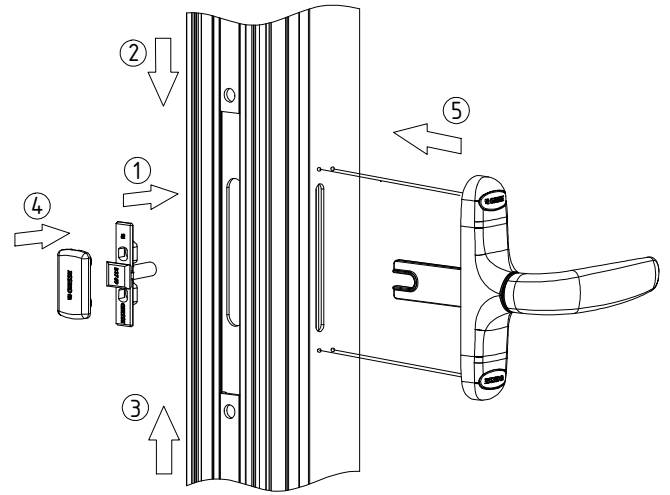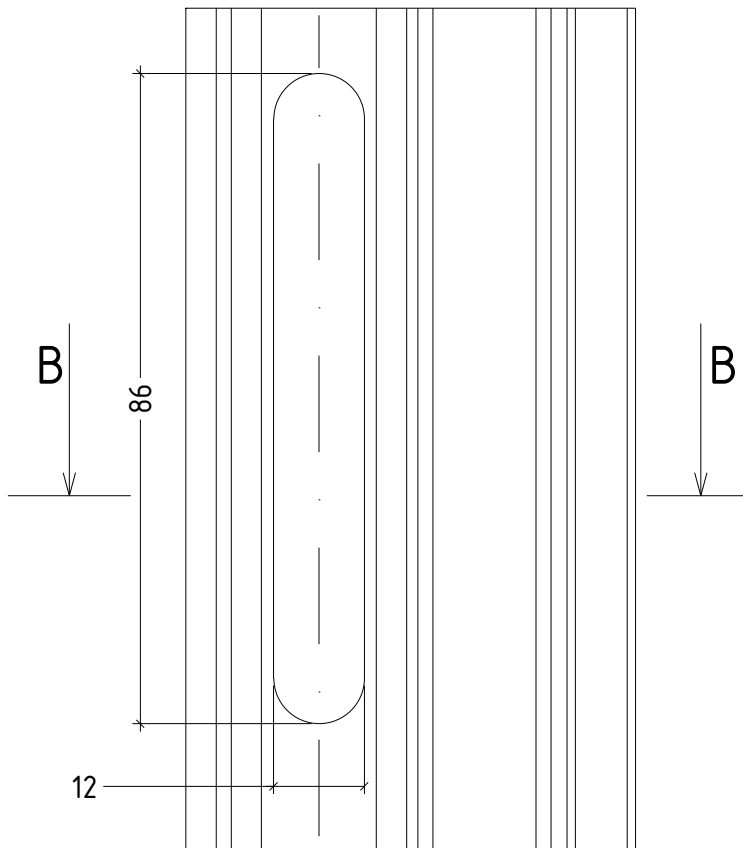

For one leaf sash is needed:

- GI212701-handle GIESSE outward opening
- GI255612.00-extension for handle GIESSE 45mm for E40 or
- GI255613.00-extension for handle GIESSE 55mm for E45
- GI255614.00moving element GIESSE 18.5mm for E40, E45

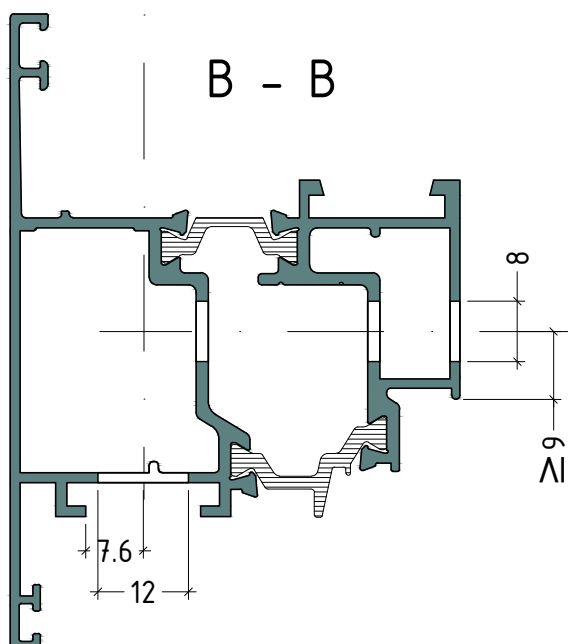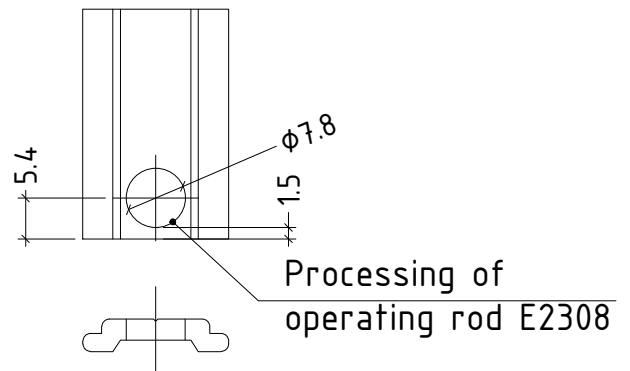

Important information:


1. The new sash allows execution of windows and door-height windows only. It is not possible to incorporate door locks in sash E45241
2. It is possible to use every kind of hinges, which are suitable for Euro-groove.

D40-24




outward opening

Connecting frame, T-profile  
and reverse profile E40171, it is necessary  
to cut the frame on the shown point

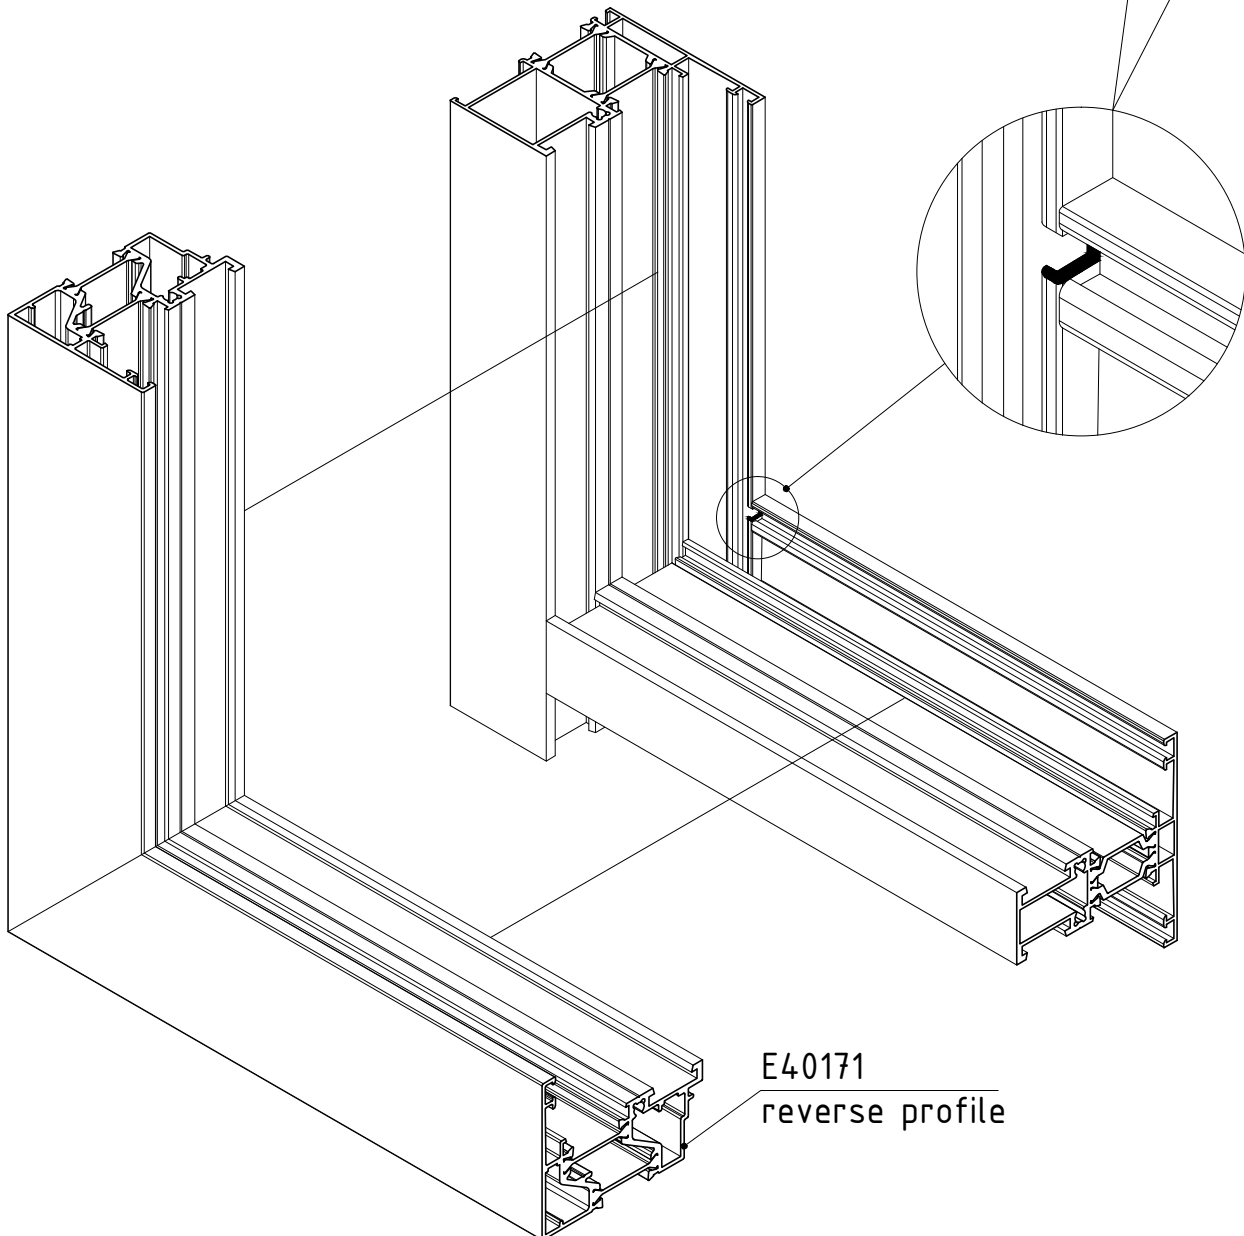


E40171  
reverse profile

machining to use E40810

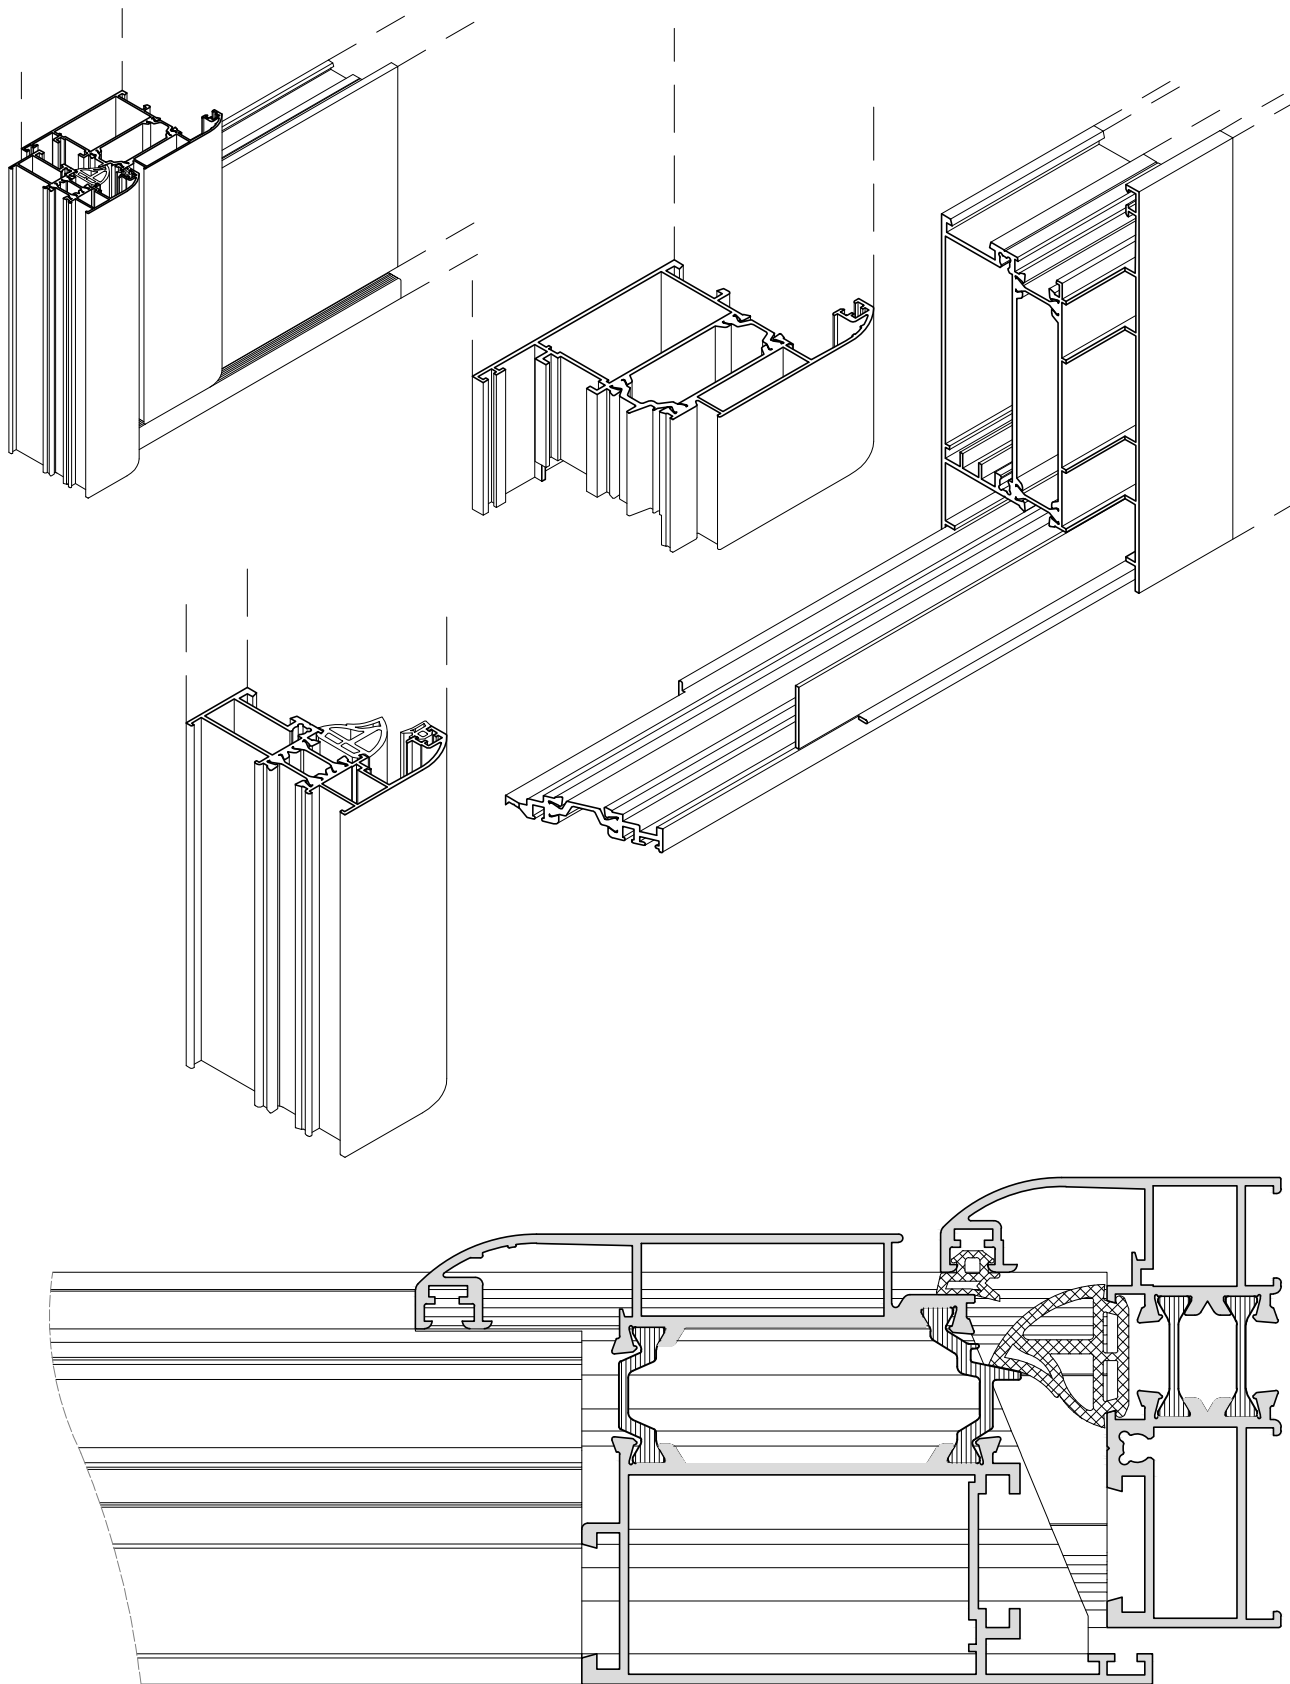



D40-26

machining to use E40810

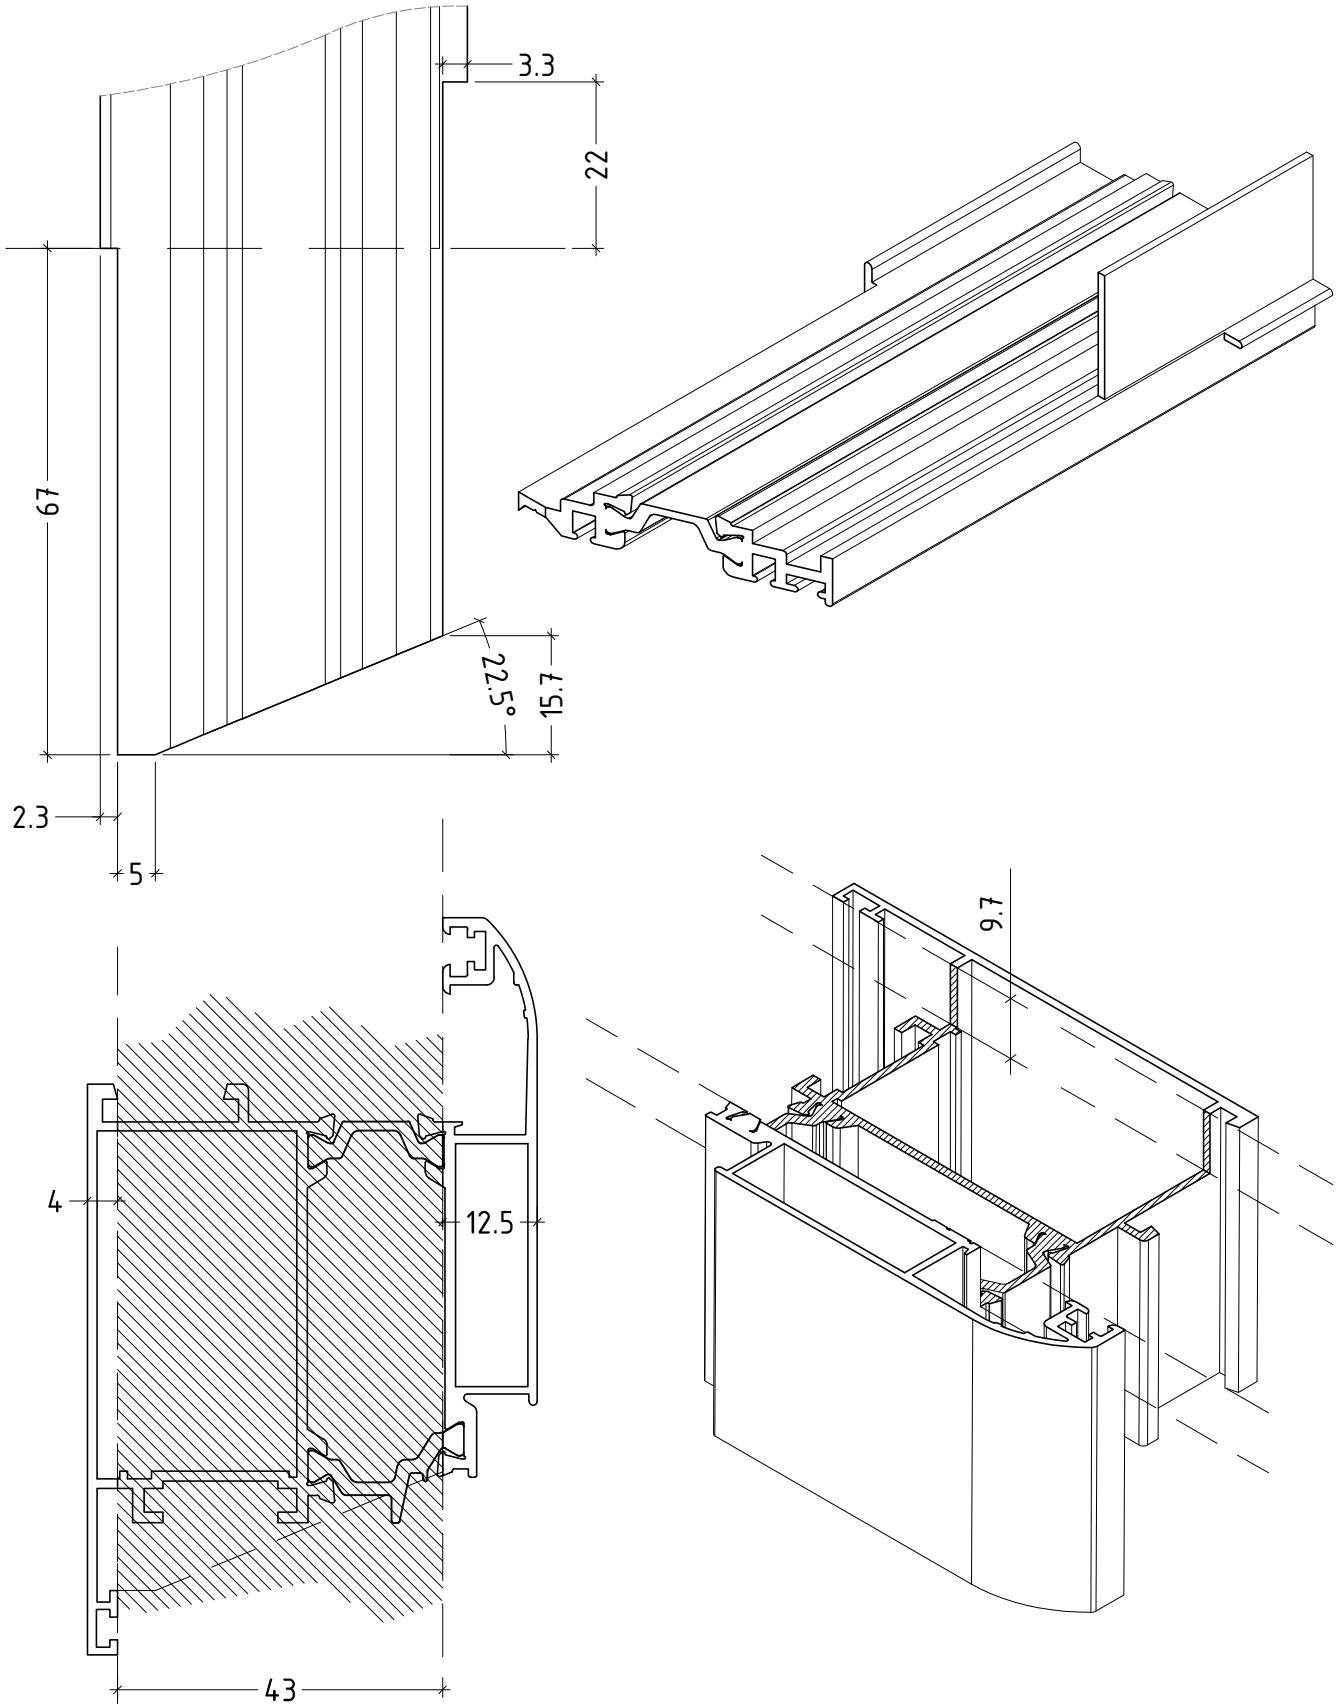


D40-27

machining to use E40811

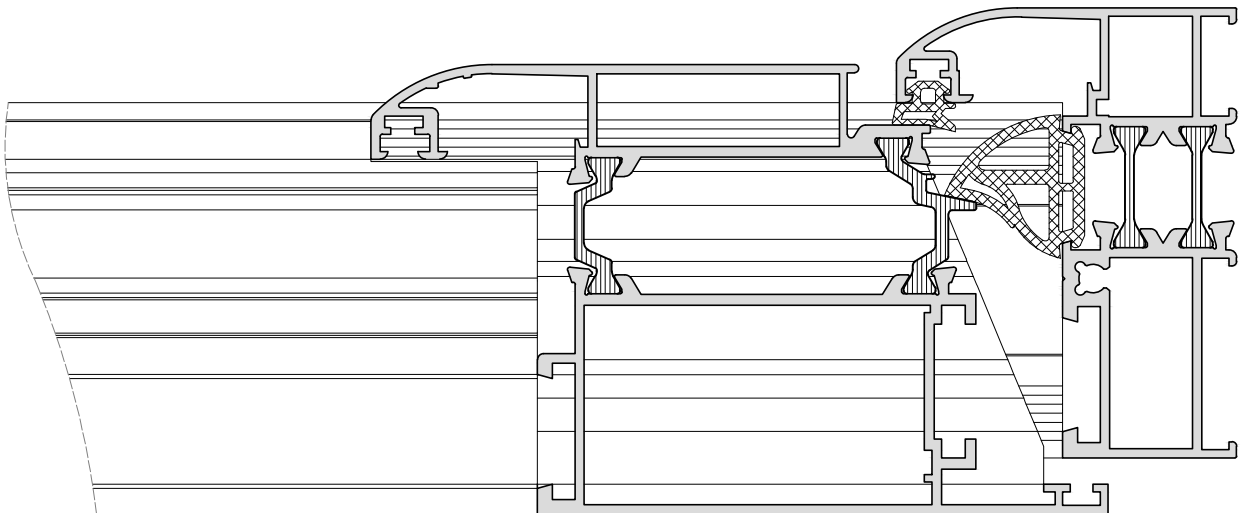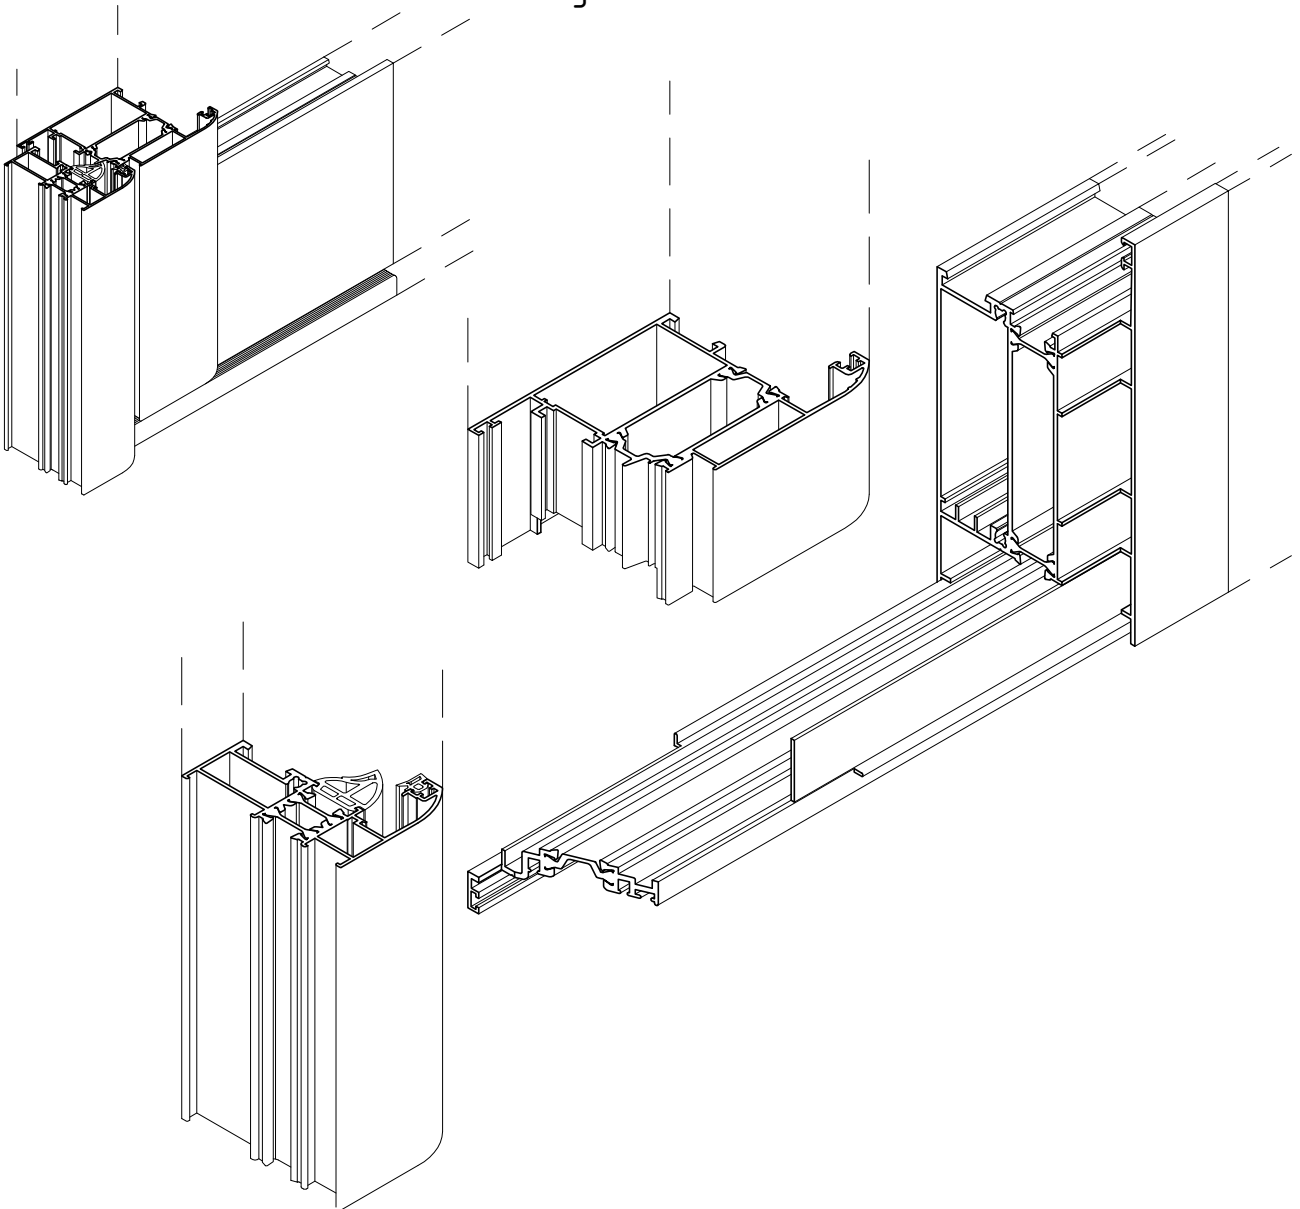


D40-28



machining to use E40811

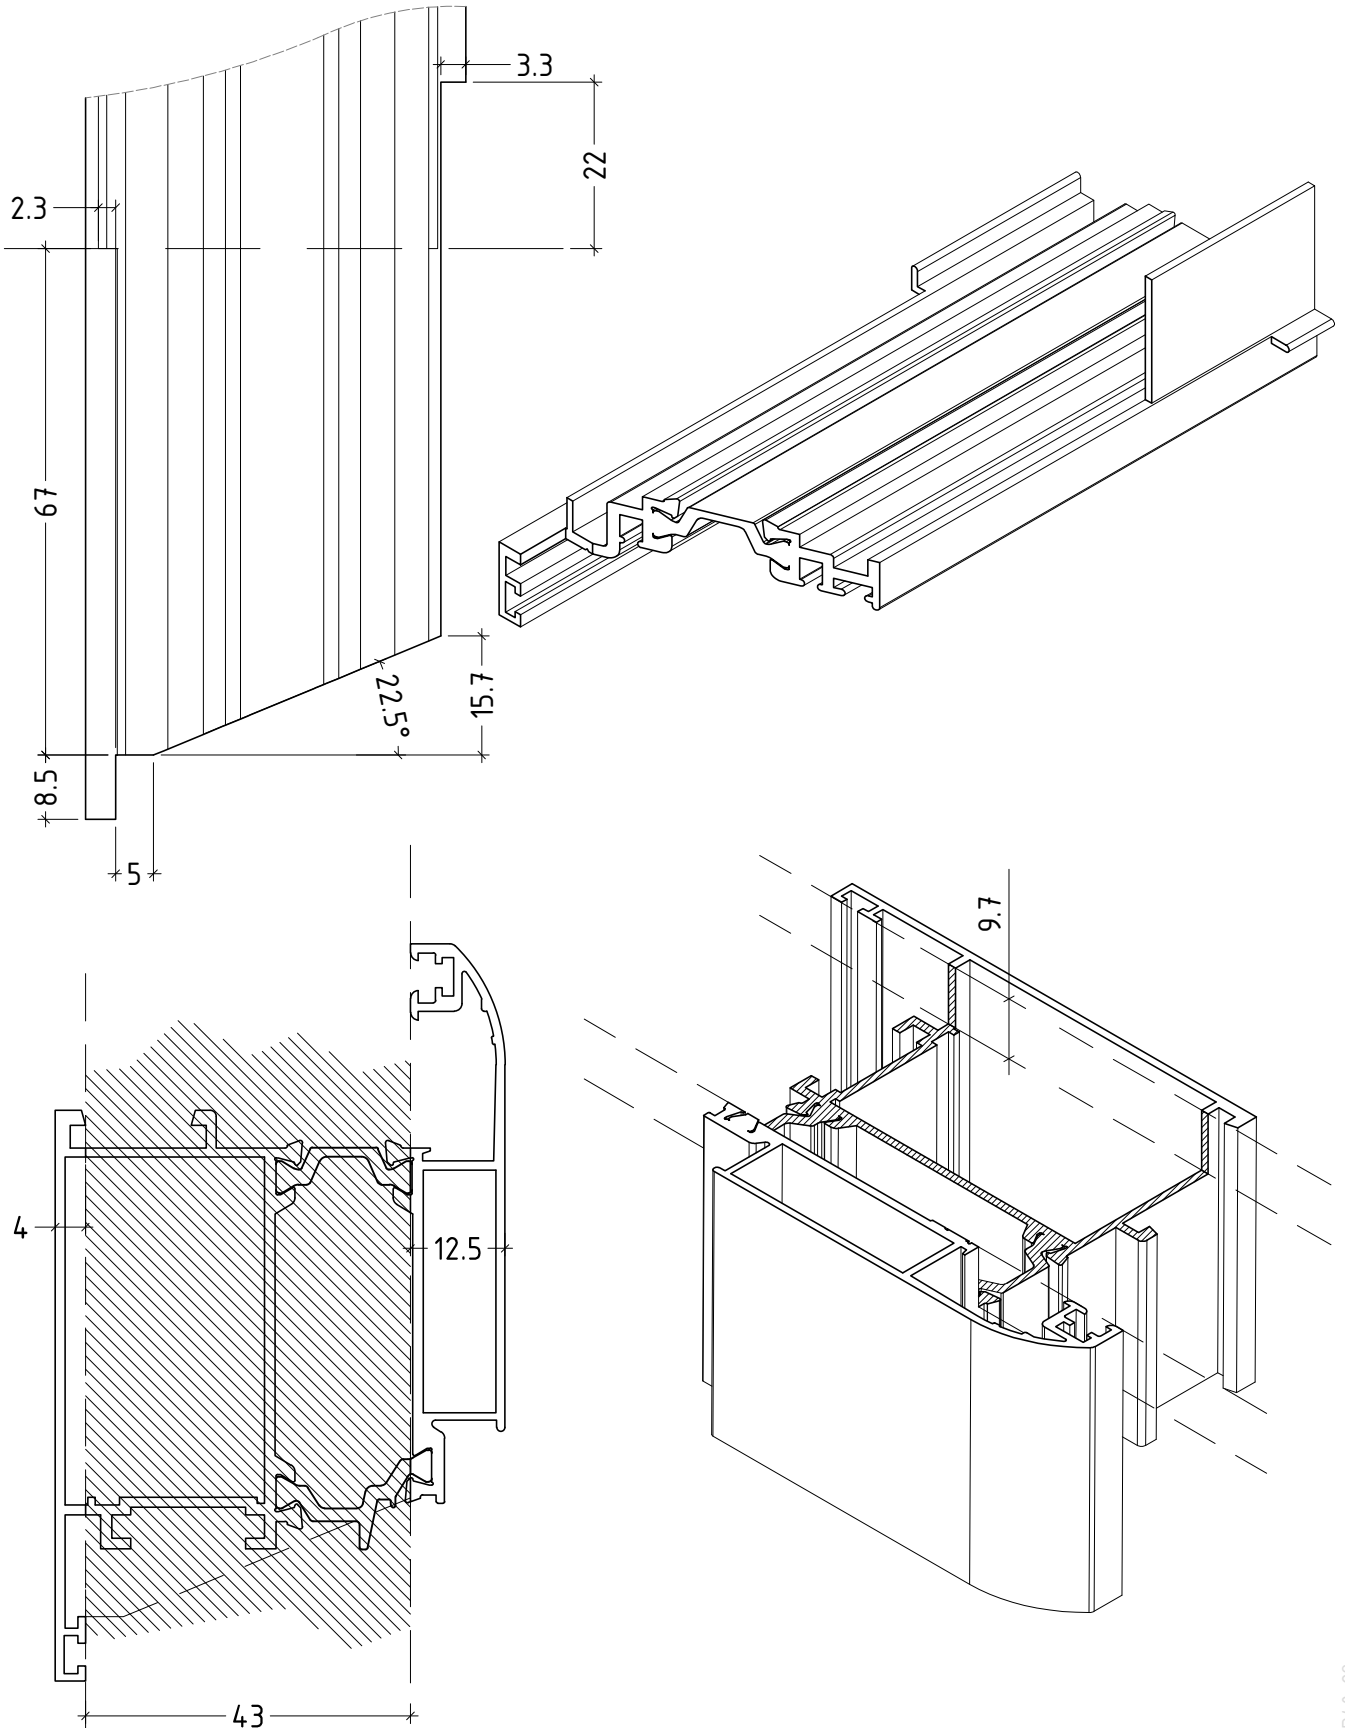

D40-29


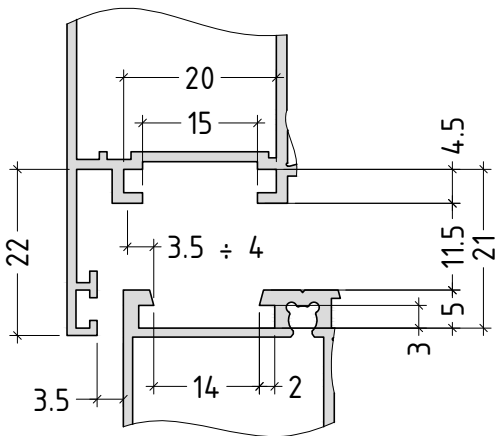








Note:  
Hardware used for E40 is intended for Eurogroove with the noted parameters

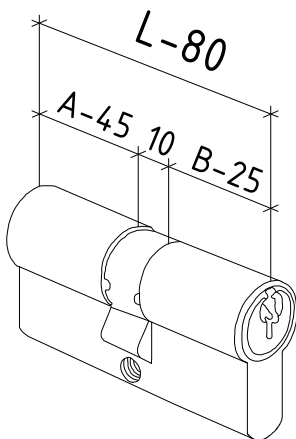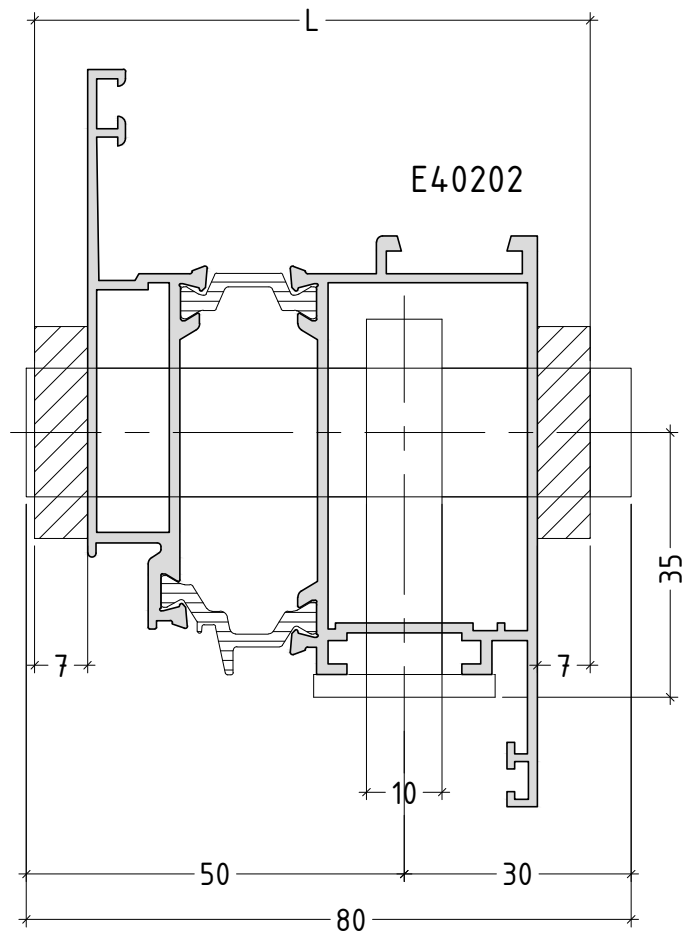

Note:  
The length L of the cylinder depends on the chosen type of decorative rosettes


machining for window handle

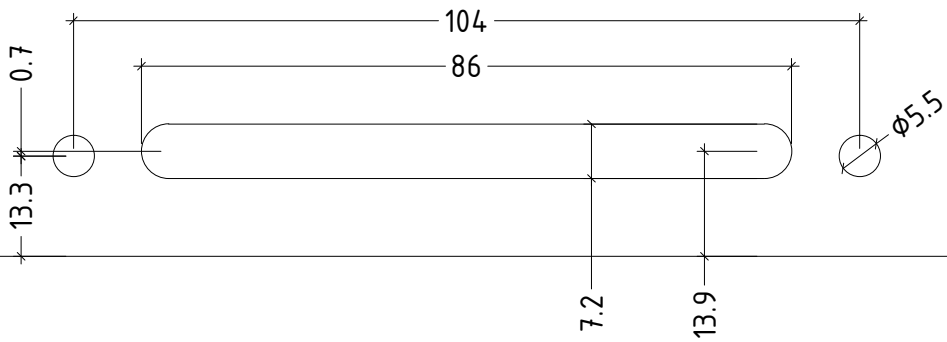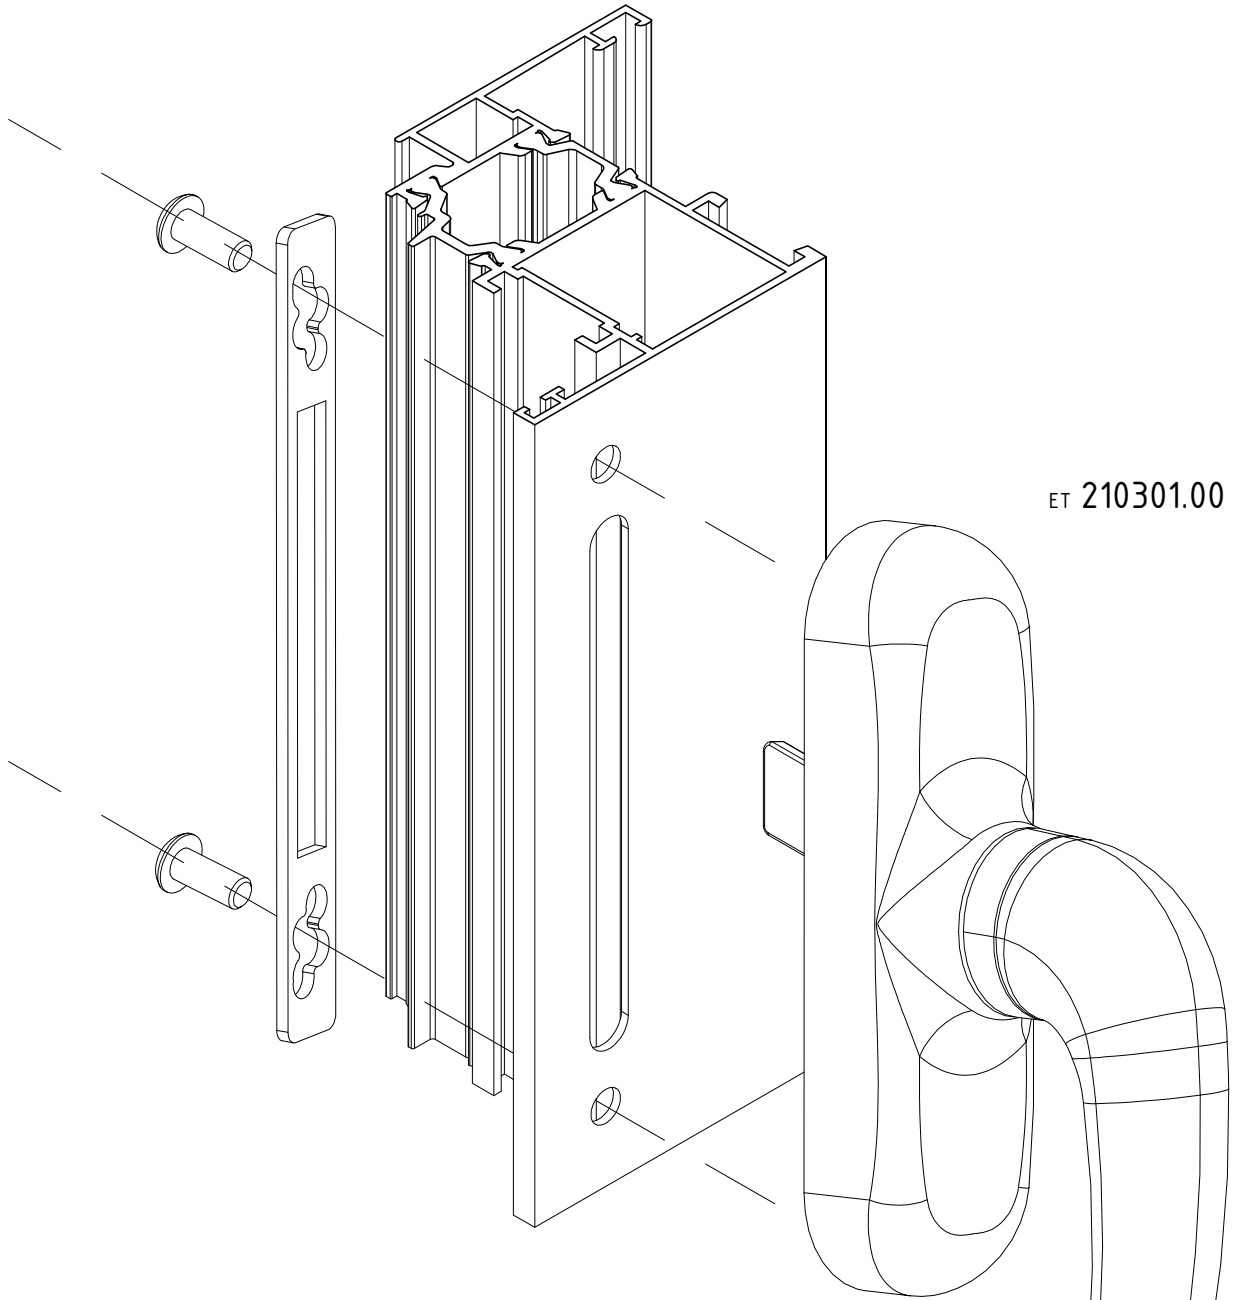

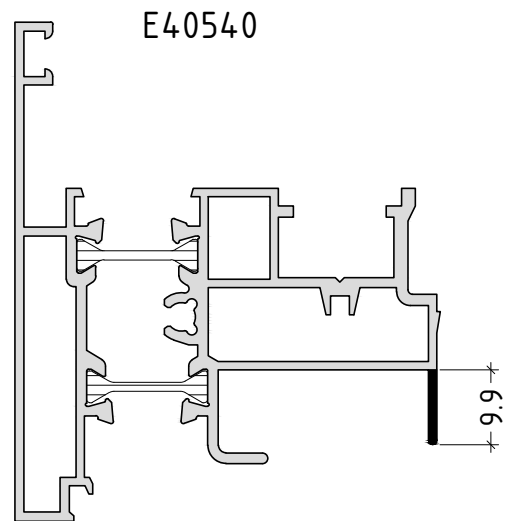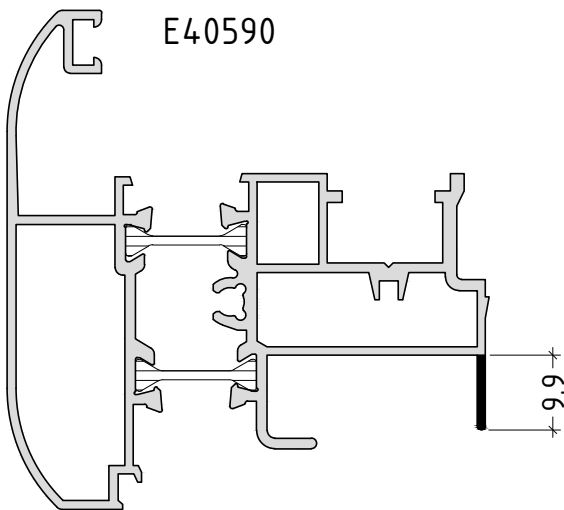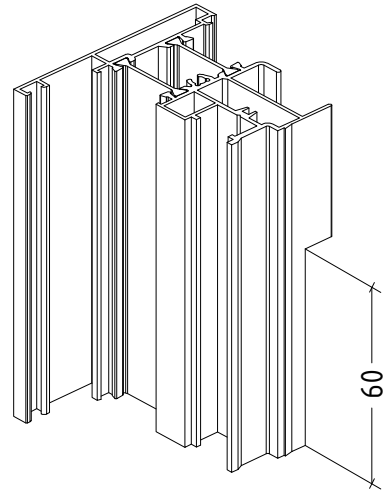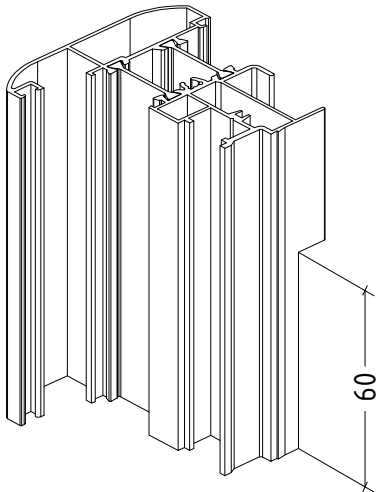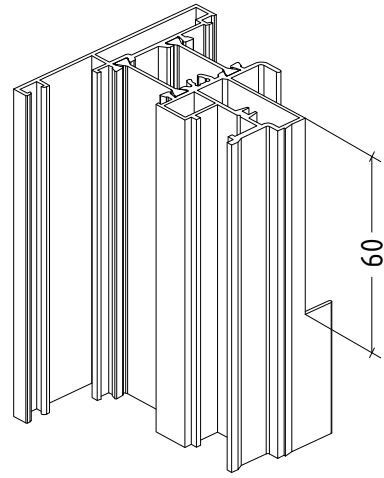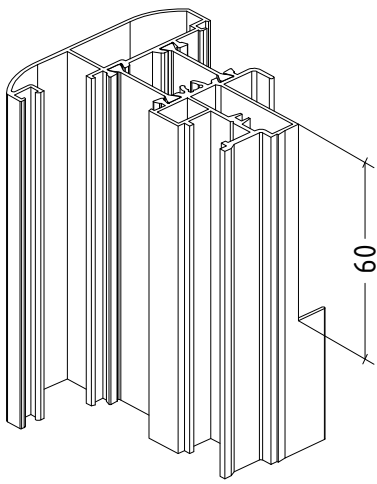



machining for GU mechanism

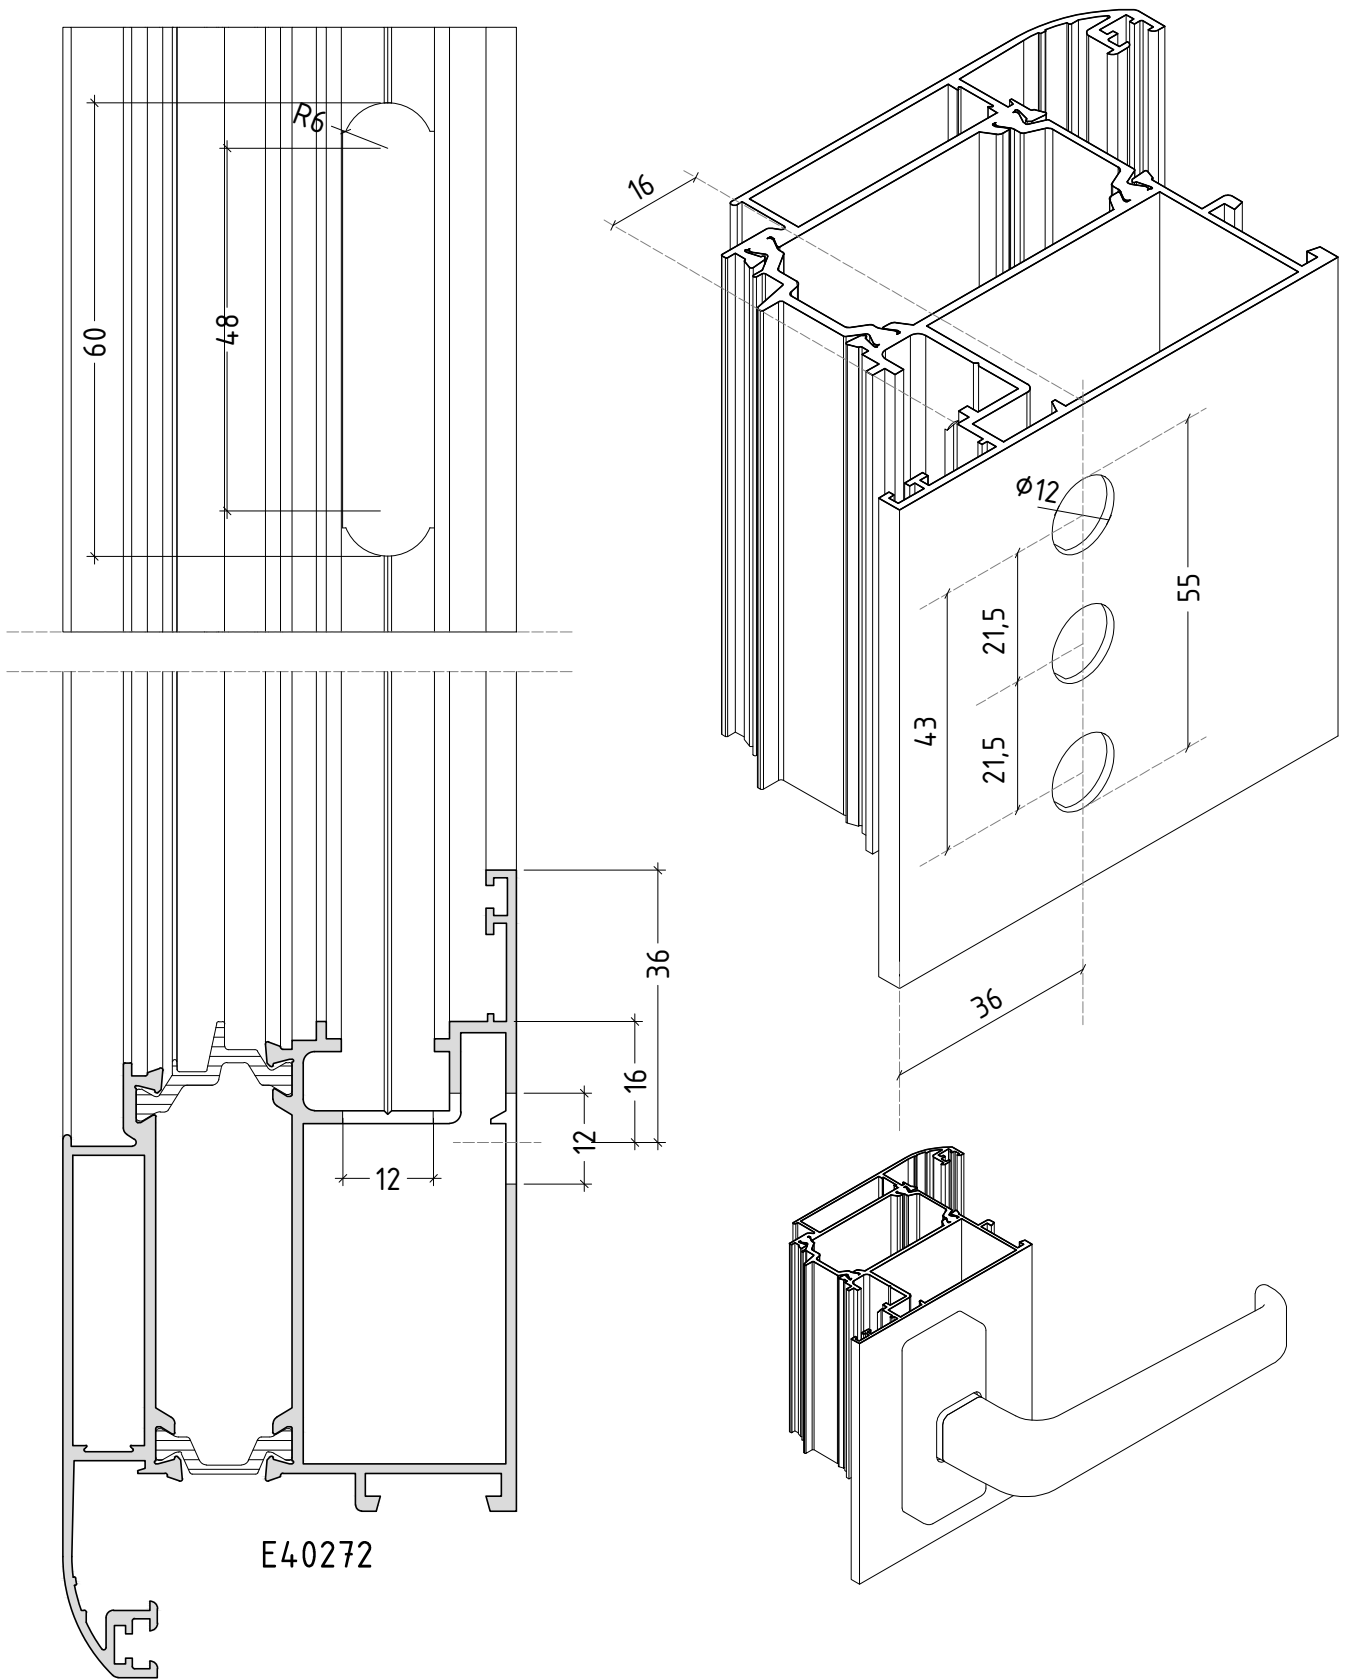


# ACCESSORIES

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 130402.00     | 60          | ●      |

elongated glazing EPDM  
gasket (3 mm)



|              |     |   |
|--------------|-----|---|
| ET 130411.00 | 150 | ● |
|--------------|-----|---|

glazing EPDM gasket (3 mm)



|              |     |   |
|--------------|-----|---|
| ET 130153.00 | 150 | ● |
|--------------|-----|---|

glazing EPDM gasket 4 mm



|              |     |   |
|--------------|-----|---|
| ET 130175.00 | 250 | ● |
|--------------|-----|---|

glazing EPDM gasket  
press-in 3-4 mm



# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 130176.00     | 125         | ●      |

glazing EPDM gasket  
press-in 5-6 mm




|              |    |   |
|--------------|----|---|
| ET 130407.00 | 80 | ● |
|--------------|----|---|

elongated glazing EPDM  
gasket press-in 5-6 mm



|              |    |   |
|--------------|----|---|
| ET 130177.00 | 60 | ● |
|--------------|----|---|

glazing EPDM gasket  
press-in 7-8 mm



|              |     |   |
|--------------|-----|---|
| ET 990619.00 | 125 | ● |
|--------------|-----|---|

|              |     |   |
|--------------|-----|---|
| ET 130205.00 | 125 | ● |
|--------------|-----|---|

P5 old code

glazing EPDM gasket  
press-in 5 mm



# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 990620.00     | 125         | ●      |
| ET 130206.00     | 125         | ●      |

P6 old code

glazing EPDM gasket  
press-in 6 mm



|              |    |   |
|--------------|----|---|
| ET 130207.00 | 75 | ● |
|--------------|----|---|

P7 old code

glazing EPDM gasket  
press-in 7 mm



|              |    |   |
|--------------|----|---|
| ET 130208.00 | 40 | ● |
|--------------|----|---|

P8 old code

glazing EPDM gasket  
press-in 8 mm



|              |    |   |
|--------------|----|---|
| ET 130210.00 | 40 | ● |
|--------------|----|---|

P10 old code

glazing EPDM gasket  
press-in 10 mm




# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 130401.00     | 40          | ●      |

center seal EPDM gasket




|              |    |   |
|--------------|----|---|
| ET 060401.00 | 40 | ● |
|--------------|----|---|

vulcanised EPDM corner for 130421

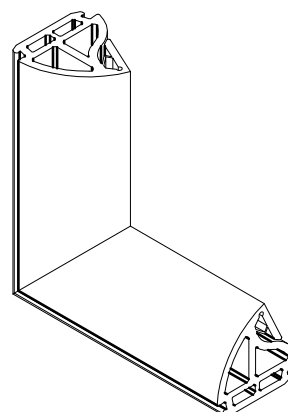


|              |    |   |
|--------------|----|---|
| ET 130414.00 | 70 | ● |
|--------------|----|---|

EPDM gasket for drainage



|              |    |   |
|--------------|----|---|
| ET 080527.00 | 75 | ● |
|--------------|----|---|

additional insulator for frame, sash for double glazing



# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 130400.00     | 250         | ●      |

internal seal EPDM gasket



|              |     |   |
|--------------|-----|---|
| ET 130174.00 | 160 | ● |
|--------------|-----|---|

interior seal EPDM gasket  
top line



|              |     |   |
|--------------|-----|---|
| ET 130131.00 | 200 | ● |
|--------------|-----|---|

interior seal gasket



|              |     |   |
|--------------|-----|---|
| ET 130154.00 | 200 | ● |
|--------------|-----|---|

interior seal window EPDM  
gasket (4 mm)



**ATTENTION**  
use with profile  
E40161

A40-05

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 130172.00     | 100         | ●      |

EPDM gasket



|              |     |   |
|--------------|-----|---|
| ET 130412.00 | 240 | ● |
|--------------|-----|---|

door seal EPDM gasket




|              |     |   |
|--------------|-----|---|
| ET 130413.00 | 200 | ● |
|--------------|-----|---|

seal EPDM gasket for decorative lattice bar (E40650)



|              |     |   |
|--------------|-----|---|
| ET 991275.00 | 100 | ● |
|--------------|-----|---|

EPDM gasket for expansion distance





# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 130184.00     | 200         | ●      |

EPDM gasket



|              |    |   |
|--------------|----|---|
| ET 130403.00 | 90 | ● |
|--------------|----|---|

wall-joining EPDM gasket  
(internal)



|              |     |   |
|--------------|-----|---|
| ET 130404.00 | 160 | ● |
|--------------|-----|---|

wall-joining EPDM gasket  
(external) for straight fixed  
frame



|              |   |   |
|--------------|---|---|
| ET 130427.00 | - | ● |
|--------------|---|---|

internal seal EPDM gasket



# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 130409.00     | 240         | ●      |

wall-joining EPDM gasket  
perimeter (external) for  
straight fixed frame




|              |     |   |
|--------------|-----|---|
| ET 130405.00 | 120 | ● |
|--------------|-----|---|

wall-joining EPDM gasket  
(external) for round fixed  
frame



|              |     |   |
|--------------|-----|---|
| ET 130410.00 | 120 | ● |
|--------------|-----|---|

wall-joining EPDM gasket  
perimeter (external) for  
round fixed frame



|              |   |   |
|--------------|---|---|
| ET 130193.00 | - | ● |
|--------------|---|---|

press in interior seal gasket





# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 053305.00     | 250         | MF     |

die cust al. joint corner bracket

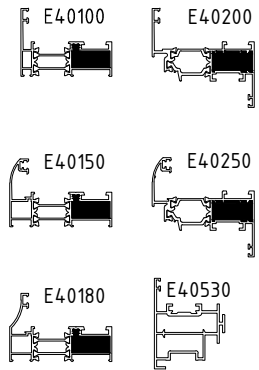


|              |     |    |
|--------------|-----|----|
| ET 050200.00 | 300 | MF |
|--------------|-----|----|

extruded al. shimming corner

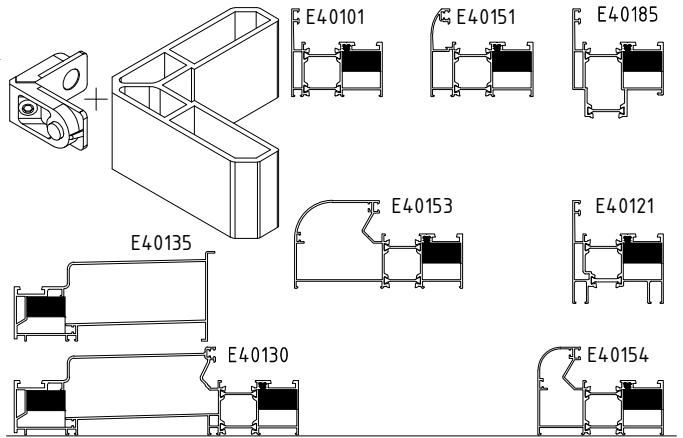


|              |     |    |
|--------------|-----|----|
| ET 050202.00 | 250 | MF |
|--------------|-----|----|

extruded al. shimming corner

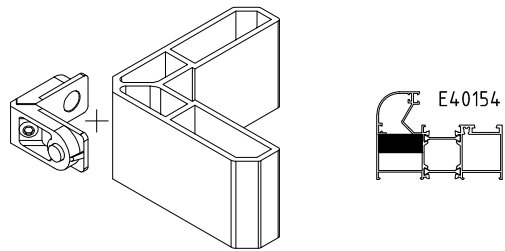

|              |     |    |
|--------------|-----|----|
| ET 050300.00 | 150 | MF |
|--------------|-----|----|

extruded al. shimming corner

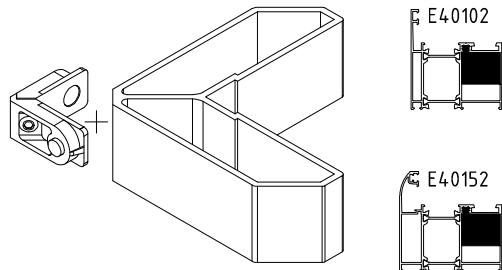


# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 050201.00     | 300         | MF     |

extruded al. shimming corner

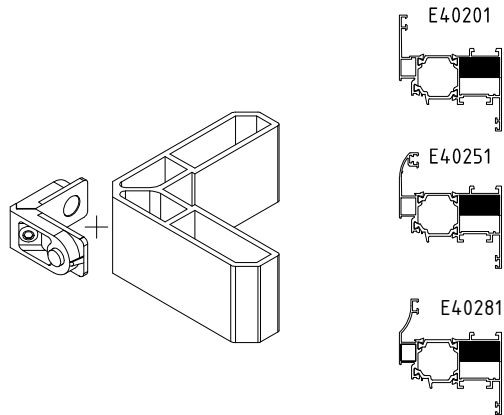

|              |     |    |
|--------------|-----|----|
| ET 050400.00 | 100 | MF |
|--------------|-----|----|


extruded al. shimming corner

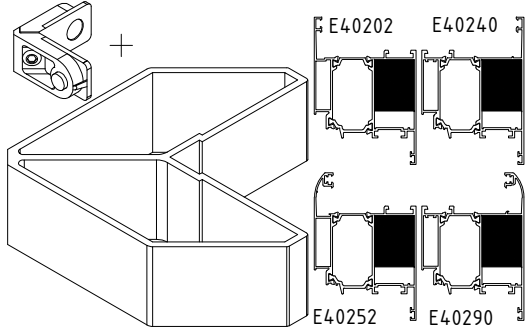

|              |     |    |
|--------------|-----|----|
| ET 054250.00 | 300 | MF |
|--------------|-----|----|

|              |     |    |
|--------------|-----|----|
| ET 054257.00 | 300 | MF |
|--------------|-----|----|

extruded al. joint corner  
bracket  
without hole/with hole

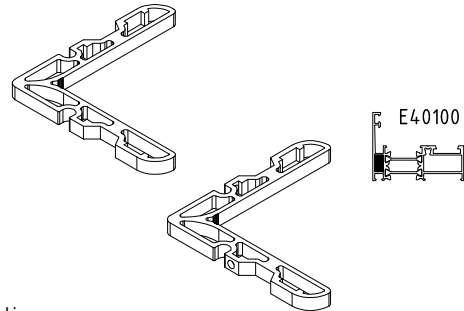


attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054252.00 | 250 | MF |
|--------------|-----|----|

|              |     |    |
|--------------|-----|----|
| ET 054259.00 | 250 | MF |
|--------------|-----|----|

extruded al. joint corner  
bracket  
without hole/with hole

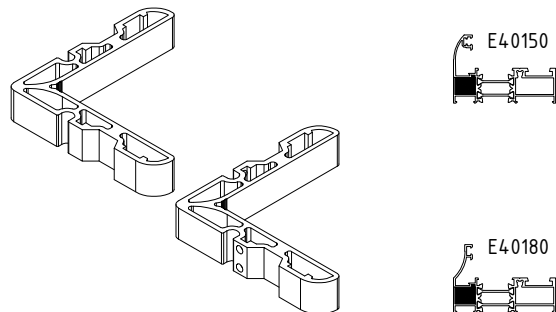


attention  
always use epoxy resin  
for long lasting joining

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054255.00     | 200         | MF     |
| ET 054253.00     | 200         | MF     |


extruded al. joint corner  
bracket  
without hole/with hole

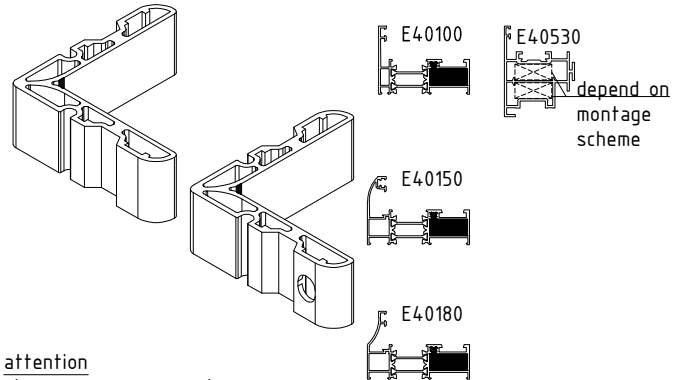

attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054251.00 | 250 | MF |
| ET 054258.00 | 250 | MF |


extruded al. joint corner  
bracket  
without hole/with hole

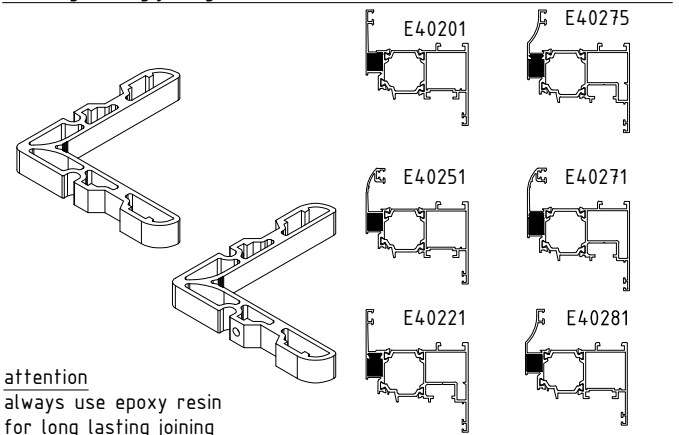

attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054256.00 | 200 | MF |
| ET 054254.00 | 200 | MF |


extruded al. joint corner  
bracket  
without hole/with hole

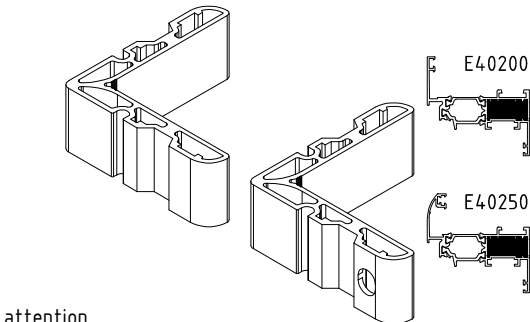

attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054300.00 | 200 | MF |
|--------------|-----|----|

extruded al. joint corner  
bracket

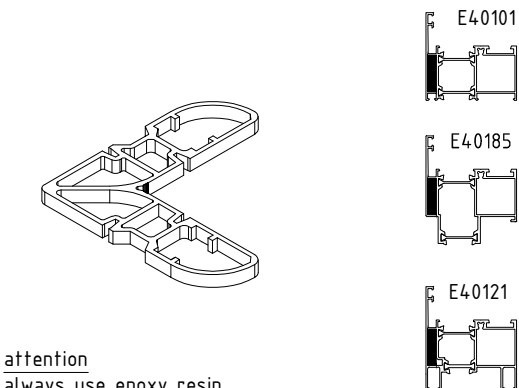



attention  
always use epoxy resin  
for long lasting joining

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054301.00     | 150         | MF     |



extruded al. joint corner bracket



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054308.00 | 100 | MF |
| ET 054451.00 | 100 | MF |


extruded al. joint corner bracket  
without hole/with hole



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054305.00 | 100 | MF |
| ET 054302.00 | 100 | MF |



extruded al. joint corner bracket  
without hole/with hole

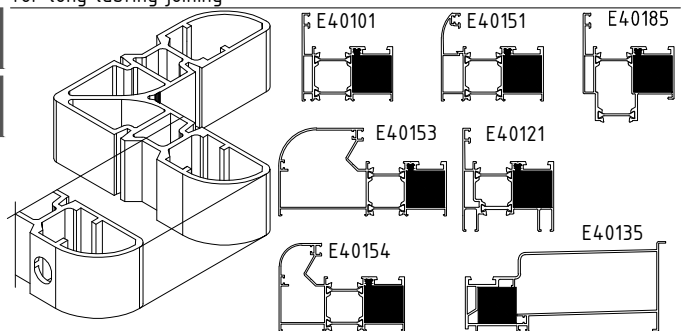

attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 054307.00 | 70 | MF |
| ET 054304.00 | 70 | MF |

extruded al. joint corner bracket  
without hole/with hole

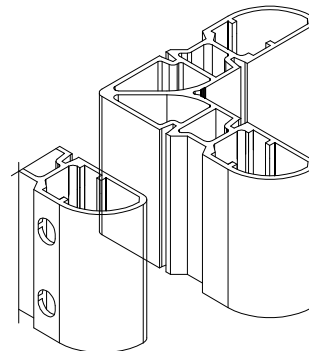

attention  
always use epoxy resin  
for long lasting joining

A40-12





# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054306.00     | 100         | MF     |

|              |     |    |
|--------------|-----|----|
| ET 054303.00 | 100 | MF |
|--------------|-----|----|



extruded al. joint corner  
bracket  
without hole/with hole



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054350.00 | 150 | MF |
|--------------|-----|----|



extruded al. joint corner  
bracket



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054352.00 | 100 | MF |
|--------------|-----|----|

extruded al. joint corner  
bracket






attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 054354.00 | 70 | MF |
|--------------|----|----|

|              |    |    |
|--------------|----|----|
| ET 054353.00 | 70 | MF |
|--------------|----|----|

extruded al. joint corner  
bracket  
without hole/with hole



attention  
always use epoxy resin  
for long lasting joining



A40-13

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054351.00     | 150         | MF     |



extruded al. joint corner bracket



attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 054501.00 | 50 | MF |
| ET 054500.00 | 50 | MF |




extruded al. joint corner bracket  
without hole/with hole



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054452.00 | 100 | MF |
| ET 054454.00 | 100 | MF |




extruded al. joint corner bracket  
without hole/with hole



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054453.00 | 100 | MF |
| ET 054455.00 | 100 | MF |

extruded al. joint corner bracket  
without hole/with hole



attention  
always use epoxy resin  
for long lasting joining

A40-14







# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054551.00     | 100         | MF     |



extruded al. joint corner bracket



attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 054470.00 | 70 | MF |
|--------------|----|----|



extruded aluminium corner bracket



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054471.00 | 150 | MF |
|--------------|-----|----|



extruded aluminium corner bracket



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 054472.00 | 200 | MF |
|--------------|-----|----|

extruded aluminium corner bracket





attention  
always use epoxy resin  
for long lasting joining

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054473.00     | 200         | MF     |




extruded aluminium corner bracket



attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 054700.00 | 70 | MF |
|--------------|----|----|




extruded al. joint corner bracket  
for GU-SIEGENIA



attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 054701.00 | 70 | MF |
|--------------|----|----|




extruded al. joint corner bracket  
for ROTO-WINKHAUSS



attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 054652.00 | 70 | MF |
|--------------|----|----|

extruded al. joint corner bracket  
for MACO




attention  
always use epoxy resin  
for long lasting joining

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054750.00     | -           | MF     |

corner bracket for variable angle 25,9mm




for profiles:  
E40201  
E40251  
E40281

attention  
always use epoxy resin  
for long lasting joining

|              |   |    |
|--------------|---|----|
| ET 054751.00 | - | MF |
|--------------|---|----|

corner bracket for variable angle 24,8mm




for profiles:  
E40101  
E40185  
E40130  
E40151  
E40154  
E40153  
E40301  
E40302  
E40351  
E40340  
E40121

attention  
always use epoxy resin  
for long lasting joining

|              |   |    |
|--------------|---|----|
| ET 054753.00 | - | MF |
|--------------|---|----|

corner bracket for variable angle 56.2mm




for profiles:  
E40153

attention  
always use epoxy resin  
for long lasting joining

|              |   |    |
|--------------|---|----|
| ET 054754.00 | - | MF |
|--------------|---|----|

corner bracket for variable angle 28.2mm



for profiles:  
E40154


attention  
always use epoxy resin  
for long lasting joining

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 054755.00     | -           | MF     |

corner bracket for variable angle 12.8mm




for profiles:  
E45340  
E45151

attention  
always use epoxy resin  
for long lasting joining

|              |   |    |
|--------------|---|----|
| ET 054757.00 | - | MF |
|--------------|---|----|

corner bracket for variable angle 5.3mm




for profiles:  
E40101  
E40185  
E40301

attention  
always use epoxy resin  
for long lasting joining

|              |   |    |
|--------------|---|----|
| ET 054756.00 | - | MF |
|--------------|---|----|

corner bracket for variable angle 6.9mm





for profiles:  
E45351

attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 070300.00 | 100 | MF |
|--------------|-----|----|

T bracket for mullions/transoms external side



attention  
always use epoxy resin  
for long lasting joining


A40-18

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 070200.00     | 100         | MF     |


t-bracket for mullions/transoms

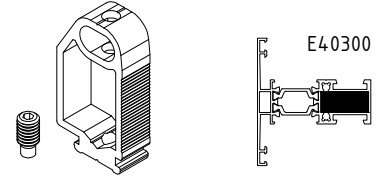

attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 070205.00 | 10 | MF |
|--------------|----|----|


screwing "T" bracket for mullions/transoms

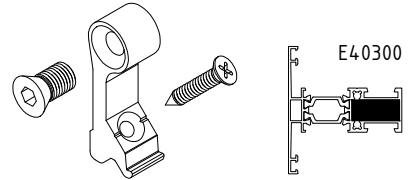

attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 070301.00 | 100 | MF |
|--------------|-----|----|


T bracket for mullions/transoms - external side



attention  
always use epoxy resin  
for long lasting joining

|              |     |    |
|--------------|-----|----|
| ET 070201.00 | 100 | MF |
|--------------|-----|----|

T-bracket for mullions/transoms

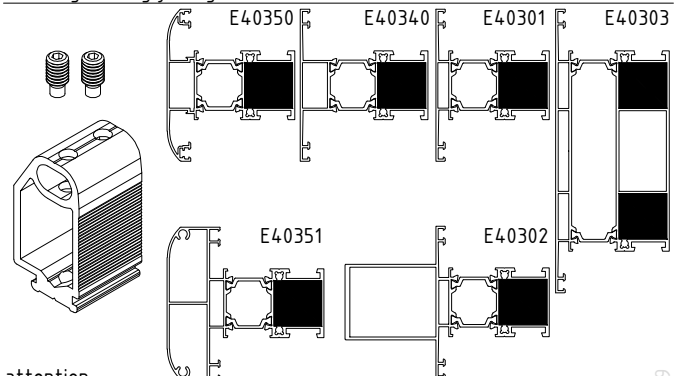

attention  
always use epoxy resin  
for long lasting joining


A40-19

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 070206.00     | 10          | MF     |


screwing "T" bracket for mullions/transoms

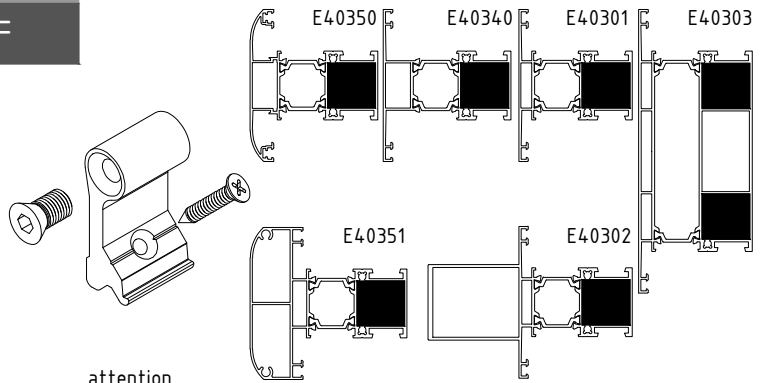

attention  
always use epoxy resin  
for long lasting joining

|              |   |    |
|--------------|---|----|
| ET 070305.00 | - | MF |
|--------------|---|----|


T bracket for mullions/transoms - external side

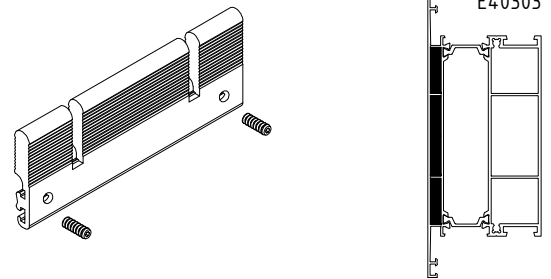

attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 070302.00 | 50 | MF |
|--------------|----|----|


T bracket for mullions/transoms - external side

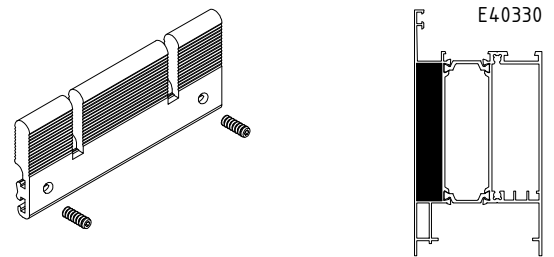

attention  
always use epoxy resin  
for long lasting joining

|              |    |    |
|--------------|----|----|
| ET 070202.00 | 50 | MF |
|--------------|----|----|

T-bracket for mullions/transoms

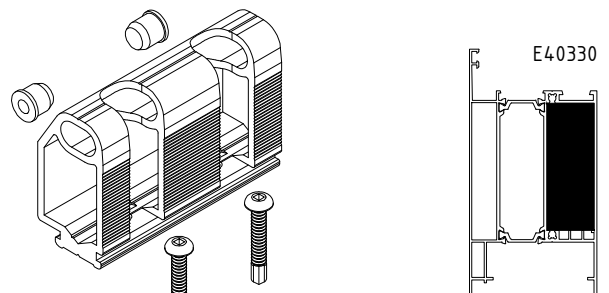

attention  
always use epoxy resin  
for long lasting joining


A40-20

# opening system with thermal break

# E40

| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 143900.00     | 100         | MF     |

roll pin  $\varnothing 3 \times 6$  mm  
with handle




|              |     |    |
|--------------|-----|----|
| ET 143901.00 | 100 | MF |
|--------------|-----|----|

roll pin  $\varnothing 4/8 \times 6.5$  mm




|              |     |    |
|--------------|-----|----|
| ET 058001.00 | 250 | MF |
|--------------|-----|----|

alignment square with  
locking function  
for straight sash profiles  
and straight frames



|              |     |    |
|--------------|-----|----|
| ET 058002.00 | 250 | MF |
|--------------|-----|----|

alignment square with  
locking function  
for round sash profiles and  
round frames

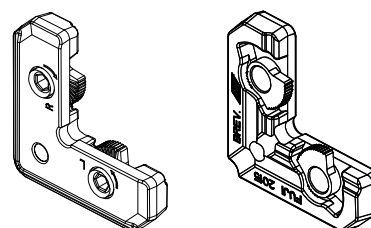


# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 057707.00     | 100         | MF     |

alignment square (plastic)  
E40271, E40272, E40222,  
E40245, E40275, E40295




|              |     |    |
|--------------|-----|----|
| ET 055509.00 | 100 | MF |
|--------------|-----|----|

alignment square  
(galvanized steel) for  
E40271, E40272, E40222,  
E40245, E40275, E40295




|              |     |    |
|--------------|-----|----|
| ET 055501.00 | 100 | MF |
|--------------|-----|----|

alignment square  
(galvanized steel)  
for  
E2004 E1000 E40 E40



|              |     |    |
|--------------|-----|----|
| ET 057704.00 | 100 | MF |
|--------------|-----|----|

alignment square (plastic)  
for E1000 E40 E40






# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 055507.00     | 200         | MF     |

alignment square  
(galvanized steel)  
for E1000 E19 E40 E40  
(5x1.25)




|              |     |    |
|--------------|-----|----|
| ET 051101.00 | 200 | MF |
|--------------|-----|----|

stainless steel joint corner  
(small)



|              |     |    |
|--------------|-----|----|
| ET 051102.00 | 200 | MF |
|--------------|-----|----|

stainless steel joint corner  
(large)




|              |    |    |
|--------------|----|----|
| ET 059902.00 | 25 | MF |
|--------------|----|----|

|              |    |   |
|--------------|----|---|
| ET 059902.02 | 25 | ● |
|--------------|----|---|

|              |    |   |
|--------------|----|---|
| ET 059902.01 | 25 | ● |
|--------------|----|---|

corner for round bead




# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 074622.00     | 5           | -      |

plastic plug for E40813




|              |   |   |
|--------------|---|---|
| ET 074620.00 | 5 | - |
|--------------|---|---|

pair of plastic plugs  
for straight secondary  
sash profile E40500

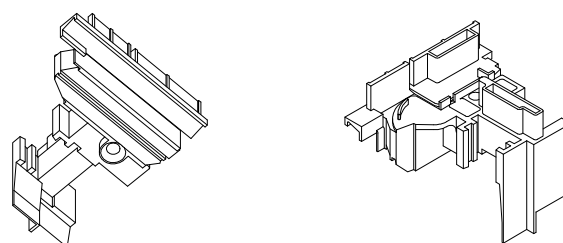


|              |   |   |
|--------------|---|---|
| ET 074621.00 | 5 | - |
|--------------|---|---|

pair of plastic plugs  
for round secondary  
sash profile E40550

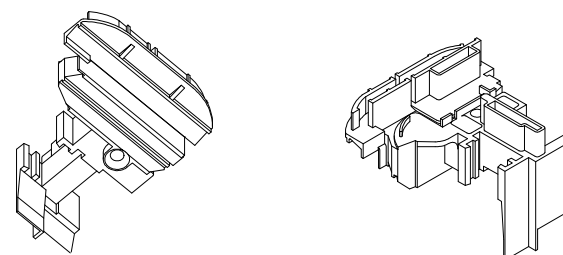

|              |   |   |
|--------------|---|---|
| ET 074635.00 | 5 | ● |
|--------------|---|---|

pair of plastic plugs (flat)  
for straight secondary sash  
profile E40540  
pvc-wood mechanism

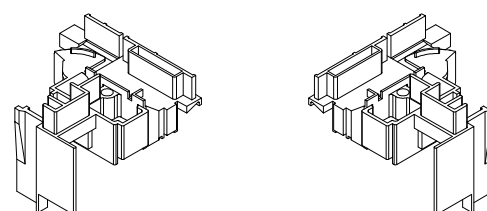


# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 074659.00     | 5           | ●      |

pair of plastic plugs (curved)  
for round secondary sash  
profile E40590  
pvc-wood mechanism

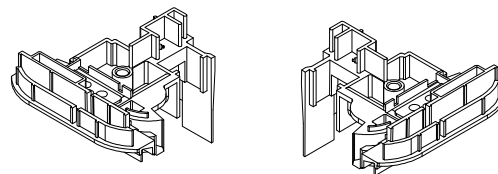


|              |     |   |
|--------------|-----|---|
| ET 074206.00 | 100 | ● |
|--------------|-----|---|

plastic drain cap 20x6mm




|              |     |   |
|--------------|-----|---|
| ET 074605.00 | 100 | ● |
|--------------|-----|---|

plastic drain cap 30x6mm



|              |     |   |
|--------------|-----|---|
| ET 074629.00 | 200 | ● |
|--------------|-----|---|

plastic plug for drip profile  
E 2357




# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 074624.00     | 200         | ●      |

plastic plug for drip profile  
E 40820




|              |     |   |
|--------------|-----|---|
| ET 135900.00 | 200 | ● |
|--------------|-----|---|

brush with metallic body  
a=12 mm - L=2.2 m



|              |   |    |
|--------------|---|----|
| ET 134200.00 | 1 | MF |
| ET 134201.01 | 1 | MF |
| ET 134255.00 | 1 | MF |


door sealing system internal  
- 13 x 28 (14) 1230 , 1030 mm  
- 13 x 28 (14) 1030 , 830 mm  
- 13 x 28 (14) 830 , 630 mm



|              |   |    |
|--------------|---|----|
| ET 134150.00 | 1 | MF |
| ET 134151.00 | 1 | MF |
| ET 134152.00 | 1 | MF |
| ET 134153.00 | 1 | MF |

door sealing system internal  
- 15.6 x 28.3 (13) 730 , 830 mm  
- 15.6 x 28.3 (13) 830 , 930 mm  
- 15.6 x 28.3 (13) 930 , 1030 mm  
- 15.6 x 28.3 (13) 1030 , 1130 mm

45 dB

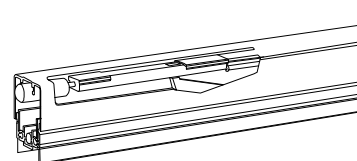


# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 074800.00     | 1           | MF     |
| ET 074800.01     | 1           | ●      |

pair of al. plugs for drip sill  
E62130

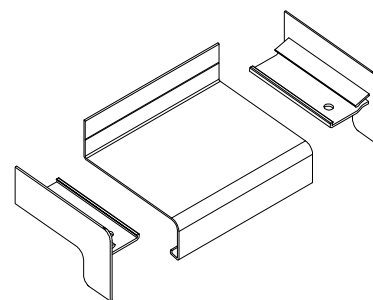


|              |   |    |
|--------------|---|----|
| ET 074801.00 | 1 | MF |
| ET 074801.01 | 1 | ●  |

pair of al. plugs for drip sill  
E62131

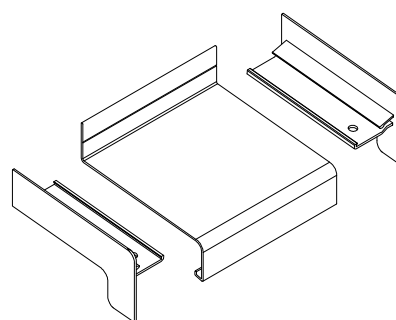


|              |   |    |
|--------------|---|----|
| ET 074802.00 | 1 | MF |
| ET 074802.01 | 1 | ●  |

pair of al. plugs for drip sill  
E62132

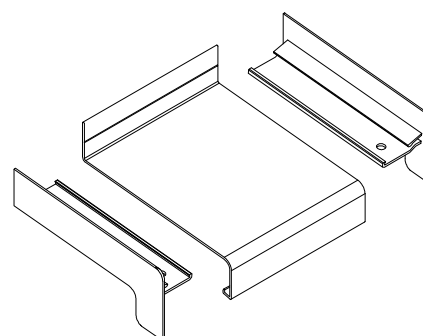

|              |   |    |
|--------------|---|----|
| ET 074803.00 | 1 | MF |
| ET 074803.01 | 1 | ●  |

pair of al. plugs for drip sill  
E62133

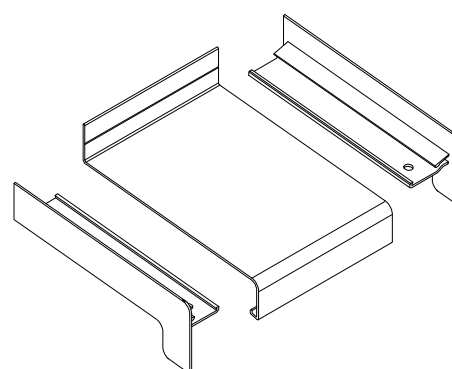


# opening system with thermal break

# E40


| code/description | package/pcs | colour |
|------------------|-------------|--------|
| ET 074804.00     | 1           | MF     |
| ET 074804.01     | 1           | ●      |

pair of al. plugs for drip sill  
E62134

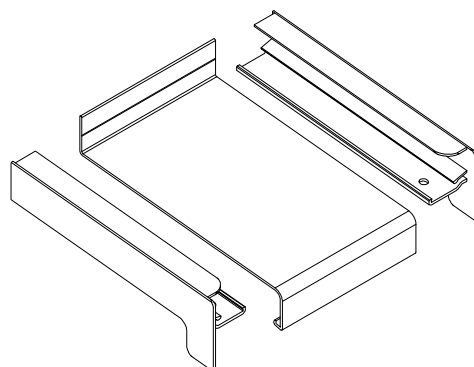


|              |   |    |
|--------------|---|----|
| ET 074805.00 | 1 | MF |
| ET 074805.01 | 1 | ●  |

pair of al. plugs for drip sill  
E62135

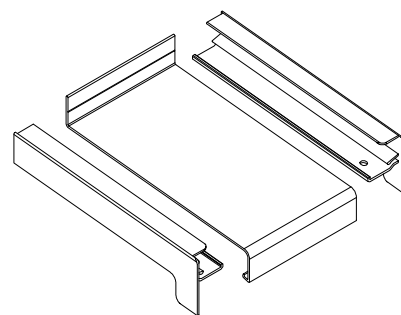


|              |   |    |
|--------------|---|----|
| ET 074807.00 | 1 | MF |
| ET 074807.01 | 1 | ●  |

pair of al. plugs for drip sill  
E62137

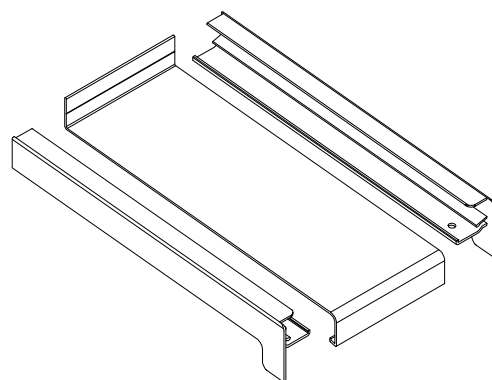

|              |   |    |
|--------------|---|----|
| ET 074808.00 | 1 | MF |
| ET 074808.01 | 1 | ●  |

pair of al. plugs for drip sill  
E62138

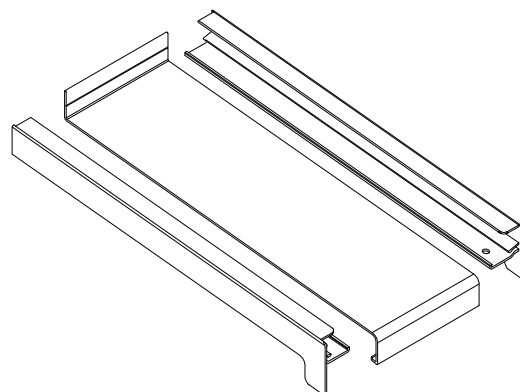

# CE MARKING

STANDARDS / PERFORMANCE CHARACTERISTICS

# CE MARKING

## WHAT DOES THE SIGN CE MEAN?

It is an abbreviation of the French "Conformite Europeene"- i.e. European Conformity. By placing the CE marking the manufacturer declares that the product complies with the general safety requirements set out in the Construction Product Regulation 305/2011.

## WHAT IS THE PURPOSE OF CE MARKING?

The CE marking represents "the European passport" of the product, its main objectives are:

CE is a declaration by the manufacturer that the product meets the essential requirements of relevant European legislation relating to health, safety and environmental protection;

CE indicates to officials in relevant ministries and departments that the product can be put on the market lawfully in the country;

CE ensures free movement of goods within the EU and the European Free Trade Association (EFTA);

CE permits the withdrawal of products that do not meet the standards by monitoring and custom authorities;  
marking with the CE mark is necessary in cases where the product is distributed within the internal market.

## WHAT ARE THE REQUIREMENTS FOR THE CE MARKING?

Doors, windows and gates (except those intended to be used for internal communication only, for fire/smoke compartmentation and on escape routes) are covered by System 3 of assessment and verification of constancy of performance.

According to the Construction Product Regulation 305/2011, this system sets the following duties:

| Tasks to be performed by the manufacturer | Tasks to be performed by Notified testing laboratory   | Conformity assessment (the basis for CE marking, which is set by the final producer)                          |
|---|--|---|
| factory production control – FPC          | Determination of the product type on the basis of type testing, type calculation, tabulated values, etc. | Declaration of performance issued by the manufacturer or his authorized representative based on test results. |

## LEGAL ACTS

- Construction Products Regulation (305/2011/EU – CPR) – replacing the Construction Products Directive (89/106/EEC – CPD)
- EN 14351-1:2006+A1:2010 – Windows and doors – Product standard, performance characteristics – Part 1: Windows and external pedestrian doorsets without resistance to fire and/or smoke leakage characteristics



# MAIN METHODS FOR OBTAINING TEST RESULTS BY THE MANUFACTURER

According to the Construction Product Regulation 305/2011 there are three main options for the manufacturers of windows and doors to obtain test results.

1

---

THE MANUFACTURER SELECTS A SAMPLE FOR TESTING AND CARRIES OUT FACTORY PRODUCTION CONTROL



NOTIFIED TESTING LABORATORY TESTS THE SAMPLE



THE MANUFACTURER OWNS THE TEST REPORT



MANUFACTURER ISSUES DECLARATION OF PERFORMANCE AND AFFIXES CE MARKING

2

---

PARTNER (SECOND MANUFACTURER PRODUCING PRODUCT WITH CORRESPONDING PRODUCT-TYPE) SELECTS A SAMPLE FOR TESTING AND CARRIES OUT FACTORY PRODUCTION CONTROL



NOTIFIED TESTING LABORATORY TESTS THE SAMPLE



THE PARTNER OWNS THE TEST REPORT



THE MANUFACTURER CARRIES OUT FACTORY PRODUCTION CONTROL AND IS ALLOWED TO USE THE TEST RESULTS OF HIS PARTNER AFTER OBTAINING PARTNER'S AUTHORIZATION



MANUFACTURER ISSUES DECLARATION OF PERFORMANCE AND AFFIXES CE MARKING

3

---

THE SYSTEM PROVIDER SELECTS SAMPLES FOR TESTING



NOTIFIED TESTING LABORATORY TESTS THE SAMPLE



THE SYSTEM PROVIDER OWNS THE TEST REPORT



THE MANUFACTURER CARRIES OUT FACTORY PRODUCTION CONTROL AND IS ALLOWED TO USE THE TEST RESULTS OF THE SYSTEM PROVIDER AFTER OBTAINING SYSTEM PROVIDER'S AUTHORIZATION



AGREEMENT BETWEEN THE MANUFACTURER AND THE SYSTEM PROVIDER

- INSTRUCTIONS FOR ASSEMBLING AND INSTALLATION OF THE SYSTEM PROVIDER RELEVANT FOR FPC OF THE MANUFACTURER
- NO REDUCTION OF PERFORMANCE LEVEL OF THE PRODUCT



MANUFACTURER ISSUES DECLARATION OF PERFORMANCE AND AFFIXES CE MARKING

---

# STANDARDS

## GENERAL


- EN 12020 (1÷2) - ALUMINIUM AND ALUMINIUM ALLOYS - EXTRUDED PRECISION PROFILES IN ALLOYS EN AW-6060 AND EN AW-6063
- EN 755 (1÷9)- ALUMINIUM AND ALUMINIUM ALLOYS - EXTRUDED ROD/BAR, TUBE AND PROFILES
- EN 573 (1÷3) - ALUMINIUM AND ALUMINIUM ALLOYS - CHEMICAL COMPOSITION AND FORM OF WROUGHT PRODUCTS
- EN 1990 EUROCODE - BASIS OF STRUCTURAL DESIGN
- EN 1991 EUROCODE 1 - ACTIONS ON STRUCTURES
- EN 1998 EUROCODE 8 - DESIGN OF STRUCTURES FOR EARTHQUAKE RESISTANCE
- EN 1999 EUROCODE 9 - DESIGN OF ALUMINIUM STRUCTURES

## WINDOWS AND DOORS


1. EN 14351 - WINDOWS AND DOORS - PRODUCT STANDARD, PERFORMANCE CHARACTERISTICS
  2. EN 12519 - WINDOWS AND PEDESTRIAN DOORS - TERMINOLOGY
  3. EN 12207 - WINDOWS AND DOORS - AIR PERMEABILITY - CLASSIFICATION
  4. EN 1026 - WINDOWS AND DOORS - AIR PERMEABILITY - TEST METHOD
  5. EN 12208 - WINDOWS AND DOORS - WATERTIGHTNESS - CLASSIFICATION
  6. EN 1027 - WINDOWS AND DOORS - WATERTIGHTNESS - TEST METHOD
  7. EN 12210 - WINDOWS AND DOORS - RESISTANCE TO WIND LOAD - CLASSIFICATION
  8. EN 12211 - WINDOWS AND DOORS - RESISTANCE TO WIND LOAD - TEST METHOD
  9. EN 1191 - WINDOWS AND DOORS - RESISTANCE TO REPEATED OPENING AND CLOSING - TEST METHOD
  10. EN ISO 10077 (1÷2) - THERMAL PERFORMANCE OF WINDOWS, DOORS AND SHUTTERS - CALCULATION OF THERMAL TRANSMITTANCE
  11. EN 12412-2 - THERMAL PERFORMANCE OF WINDOWS, DOORS AND SHUTTERS - DETERMINATION OF THERMAL TRANSMITTANCE BY HOT BOX METHOD - PART 2: FRAMES
  12. EN 13115 - WINDOWS - CLASSIFICATION OF MECHANICAL PROPERTIES - RACKING, TORSION AND OPERATING FORCES
  13. EN 1627 - WINDOWS, DOORS, SHUTTERS - BURGLAR RESISTANCE - REQUIREMENTS AND CLASSIFICATION
  14. EN 1628 - WINDOWS, DOORS, SHUTTERS - BURGLAR RESISTANCE - TEST METHOD FOR THE DETERMINATION OF RESISTANCE UNDER STATIC LOADING
  15. EN 1629 - WINDOWS, DOORS, SHUTTERS - BURGLAR RESISTANCE - TEST METHOD FOR THE DETERMINATION OF RESISTANCE UNDER DYNAMIC LOADING
  16. EN 1630 - WINDOWS, DOORS, SHUTTERS - BURGLAR RESISTANCE - TEST METHOD FOR THE DETERMINATION OF RESISTANCE TO MANUAL BURGLARY ATTEMPTS
  17. EN ISO 717-1 - ACOUSTICS - RATING OF SOUND INSULATION IN BUILDINGS AND OF BUILDING ELEMENTS - PART 1: AIRBORNE SOUND INSULATION
  18. EN ISO 10140 - ACOUSTICS - LABORATORY MEASUREMENT OF SOUND INSULATION OF BUILDING ELEMENTS
-

# HATCHES


Hatches for different materials



EPDM




PVC




gypsum board




silicone seal




Insulation soft




Insulation hard



concrete wall



plaster




wood



butyl seal



membrane



silicone seal


backer rod




PVC spacer



etalbond



sheet aluminium



glass



aluminium profile



steel

# LIABILITY

The stated data and calculating methods are provided by ETEM as a guideline only. The information given in this catalogue does not substitute of all applicable regulations – Eurocodes, harmonized European standards, national or regional building codes.

The specific conditions and technical details of every particular project have to be taken into consideration.

The right choice of all elements as well as any special requirements regarding stability of the structure must always be considered by the structural/façade engineer, responsible for the project.

The solutions presented in these pages are indicative and can not cover all possible project cases. Because of that every single project has to be evaluated by the structural/facade engineer in charge taking into consideration the specific features, such as climate conditions, location, orientation, etc.

ETEM is not liable for any calculations and conclusions made on the basis of the stated information. All calculations and specifications must be estimated, endorsed and guaranteed by architect, engineer, professional or legal entity authorized by law for such activities.

# COPYRIGHT

Copyright© 2014 ETEM

The design, structure and content of this catalogue are subject of copyright and the exclusive rights belong to ETEM. Modifying, copying, publishing, selling or licensing any part or the whole content of this catalogue are strongly prohibited without the permission of ETEM.

Any unauthorized use of content may violate copyright or other laws.

## DISCLAIMER

ETEM is not responsible for any typographical errors, technical inaccuracies and following changes of the content of this catalogue.

Before starting manufacturing process, it is highly recommended to contact ETEM R&D department in order to provide you with updated information.

---

[WWW.ETEM.COM](http://WWW.ETEM.COM)

ETEM ALBANIA

ETEM BULGARIA

ETEM GREECE

ETEM ROMANIA

ETEM SERBIA

ETEM UKRAINE

